

List of pages in this Trip Kit

Trip Kit Index

Airport Information For UHBB

Terminal Charts For UHBB

Revision Letter For Cycle 08-2026

Change Notices

Notebook

General Information

Location: BLAGOVESHCHENSK RUS

ICAO/IATA: UHBB / BQS

Lat/Long: N50° 25.53', E127° 24.75'

Elevation: 638 ft

Airport Use: Public

Daylight Savings: Not Observed

UTC Conversion: -9:00 = UTC

Magnetic Variation: 12.0° W

Fuel Types: Jet A-1

Repair Types: Minor Airframe, Minor Engine

Customs: Yes

Airport Type: IFR

Landing Fee: Yes

Control Tower: Yes

Jet Start Unit: No

LLWS Alert: No

Beacon: No

Sunrise: 2000 Z

Sunset: 1055 Z

Runway Information

Runway: 18

Length x Width: 9186 ft x 148 ft

Surface Type: asphalt

TDZ-Elev: 565 ft

Lighting: Edge, ALS

Runway: 36

Length x Width: 9186 ft x 148 ft

Surface Type: asphalt

TDZ-Elev: 638 ft

Lighting: Edge, ALS

Communication Information

ATIS: 126.400

Blagoveshchensk Tower: 124.000 Secondary

Blagoveshchensk Tower: 127.200

Blagoveshchensk Apron Ramp/Taxi: 118.900

Blagoveshchensk Transit Operations: 131.900 Non-English

UHBB/BQS
IGNATYEVO

JEPPESEN

BLAGOVESHCHENSK, RUSSIA

5 JUL 24

10-1P

Eff 11 Jul

AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 126.4

1.2. COMMUNICATION FAILURE PROCEDURES

In case of radio communication failure:

- Switch on distress signal "MAYDAY" and, if SSR transponder is AVBL, set code 7600;
- Take measures to re-establish radio communication using emergency frequency 121.500 MHz, or with other ACFT and ATS units;
- Continue transmission of reports on ACFT position and flight altitude;
- Execute approach in accordance with the established communication failure procedures;
- Monitor LOM frequency for ATS unit information and instructions;
- Proceed to the alternate aerodrome in case of adverse weather conditions at Blagoveshchensk aerodrome.

Mobile phone communication with the Flight Control Officer of the Control Tower may be used: + 7 (4162) 499-008

1.3. LOW VISIBILITY PROCEDURES (LVP)

LVP are implemented when RVR is less than 550m.

The flight crews are informed about LVP implementation via ATIS or TWR controller using the phrase: "Low visibility procedures in progress. Check your minimum".

When LVP are in force:

- not more than one taxiing ACFT can be present on the maneuvering area;
- responsibility for assignment of taxi routes on the maneuvering area is placed on TWR controller.

ACFT taxiing to the RWY holding position of RWY 18/36 shall be executed via TWYs A and B after Follow-me vehicle or towing.

Responsibility for RWY incursion and non-adherence to the assigned taxi routes on the maneuvering area rests with the flight crew.

Flight crew shall follow all instructions of TWR controller concerning holding at RWY holding position of RWY 18/36.

If necessary to vacate the RWY, TWR controller and the flight crew coordinate the position from where Follow-me vehicle will escort the ACFT to the stand.

After parking on the stand, flight crew shall report TWR controller.

When LVP are in force, it is PROHIBITED:

- to cross ILS critical area marked with the established day marking without permission of TWR controller;
- to take off without stop at the line-up position;
- to take off not from RWY beginning.

1.4. RWY OPERATIONS

ACFT with wingspan of above 79'/24m are permitted to make a turn on the RWY only at RWY THR on the RWY turn pads.

1.5. TAXI PROCEDURES

Responsibility for observance of taxiing rules is placed on the pilot-in-command.

Crossing of ILS critical areas by ACFT, special vehicles and mechanical means shall be executed by clearance of Tower controller.

ACFT are permitted to taxi via TWY D under own engines power in daylight hours.

When VIS is below 2000m and at NIGHT, ACFT shall taxi via TWY D after Follow-me vehicle.

UHBB/BQS
IGNATYEVO

JEPPESEN

BLAGOVESHCHENSK, RUSSIA

5 JUL 24

10-1P1

Eff 11 Jul

AIRPORT BRIEFING

1. GENERAL

1.6. PARKING INFORMATION

ACFT taxiing into stands shall be carried out by signals of the specialist coordinating ACFT ground movement. If the specialist is not present, the flight crew shall stop the ACFT and report to the TWR controller.

When parking of arriving ACFT is required by towing, ACFT stop shall be carried out by instruction of the specialist coordinating ACFT ground movement. If the specialist is not present, the flight crew shall stop the ACFT and report to the TWR controller. After that, ACFT parking shall be carried out by towing.

Two-way communication via intercom shall be maintained between the flight crew and the specialist in charge of towing. When communication via intercom is not available contact Apron controller on frequency 118.900 MHz.

Flight crew shall report ACFT arrival to stand to TWR controller using the following phraseology: "ACFT call sign, on stand...".

When ACFT is parked not in accordance with the established marking, flight crew shall immediately inform TWR controller about it.

Helicopters can be parked on any stand corresponding to their size.

Helicopters are parked mainly on stands 6 thru 14 and 23 thru 28.

Stands 4, 9 and 22 available as sanitary stands.

1.7. OTHER INFORMATION

Birds.

Radar vectoring may be applied by ATS unit to provide execution of missed approach. In case missed approach is executed by decision of pilot-in-command, the flight crew must immediately report it to TWR controller.

Draining of liquids from ACFT onto artificial pavement is PROHIBITED.

2. ARRIVAL

2.1. COMMUNICATION FAILURE PROCEDURES

In case of radio communication failure before entry into Blagoveshchensk/ Ignatyevo terminal area, continue the flight at FL last assigned by ATS unit controller towards NDB WZ to the holding area, then according to the holding pattern reach FL080 and conduct priority approach.

In case of radio communication failure within terminal area, continue approach according to information obtained on entering the terminal area and the established procedure listening to instructions of ATS unit controller on NDB LZ frequency.

2.2. TAXI PROCEDURES

After landing flight crew shall vacate RWY via TWYs A and B by instruction of TWR controller.

Flight crew shall report TWR controller about RWY vacation only after ACFT occupies TWYs A and B.

ACFT shall be towed from engine start-up/shutdown point to a stand.

3. DEPARTURE

3.1. DE-ICING

ACFT treatment with de-icing fluid shall be carried out on engines start-up/shut-down position. ACFT movement to de-icing area shall be carried out by towing. De-icing treatment of ACFT with running engines is not applied. Radio communication with the main de-icing operator shall be maintained on frequency 118.900MHz of Apron controller.

The responsibility for engines start-up after de-icing treatment of ACFT is placed on the aerodrome specialist or staff of aerodrome-engineering service responsible for ACFT departure, in accordance with ground handling agreement.

3.2. START-UP AND TAXI PROCEDURES

Before establishing radio communication for engine start-up request, flight crew must listen to the current ATIS broadcast and report its code letter on initial radio contact with TWR controller.

ACFT shall be towed to engine start-up/shutdown point.

Taxiing and towing shall be carried out after obtaining TWR controller's clearance and taxi route information. Taxiing and towing without TWR controller's clearance and continuous two-way communication are PROHIBITED.

Flight crew obtains line-up and take-off clearance from TWR controller depending on air situation.

3.3. RWY OPERATIONS

Take-off not from RWY beginning shall be executed upon request of the flight crew or at the initiative of TWR controller.

Responsibility for taking the decision to execute such take-off is placed on the pilot-in-command.

If RWY occupation is necessary for more than 1 minute, before its occupation flight crew reports the necessary time for take-off preparation to TWR controller.

If more than 1 minute has passed since the issue of take-off clearance, flight crew must request another take-off clearance.

3.4. COMMUNICATION FAILURE PROCEDURES

In case of radio communication failure after take-off, if at 1100' (145m) or above communication with TWR controller is not established, continue to climb to 2200' (280m), proceed according to the approach procedure and land at Blagoveshchensk aerodrome depending on meteorological conditions and ACFT landing mass.

If for any reasons landing is not possible at Blagoveshchensk aerodrome (due to landing mass, meteorological conditions, etc.), proceed to the holding area, established for this RWY direction climbing to FL080.

If required, on a pilot-in-command's decision, after passing NDB WZ, ACFT may proceed along the route to the alternate aerodrome indicated in the flight plan for the flight without radio communication at one of FL140, FL150 or FL240, FL250 depending on flight direction.

UHBB/BQS
IGNATYEVO


JEPPesen
19 APR 24 **10-1R**

BLAGOVESHCHENSK, RUSSIA
RADAR MINIMUM ALTITUDES

Apt Elev
648

Alt Set: hPa (MM on request) QNH (QFE on request)
Trans level: FL050
FL060 when QNH is less than 1013 hPa (760 mm)
FL070 when QNH is less than 977 hPa (733 mm)
Trans alt: 4000

1. Chart only to be used for cross-checking of altitudes while under vectoring control.
2. During vectoring under low-temperature conditions, minimum altitudes must be corrected by altimeter temperature correction.

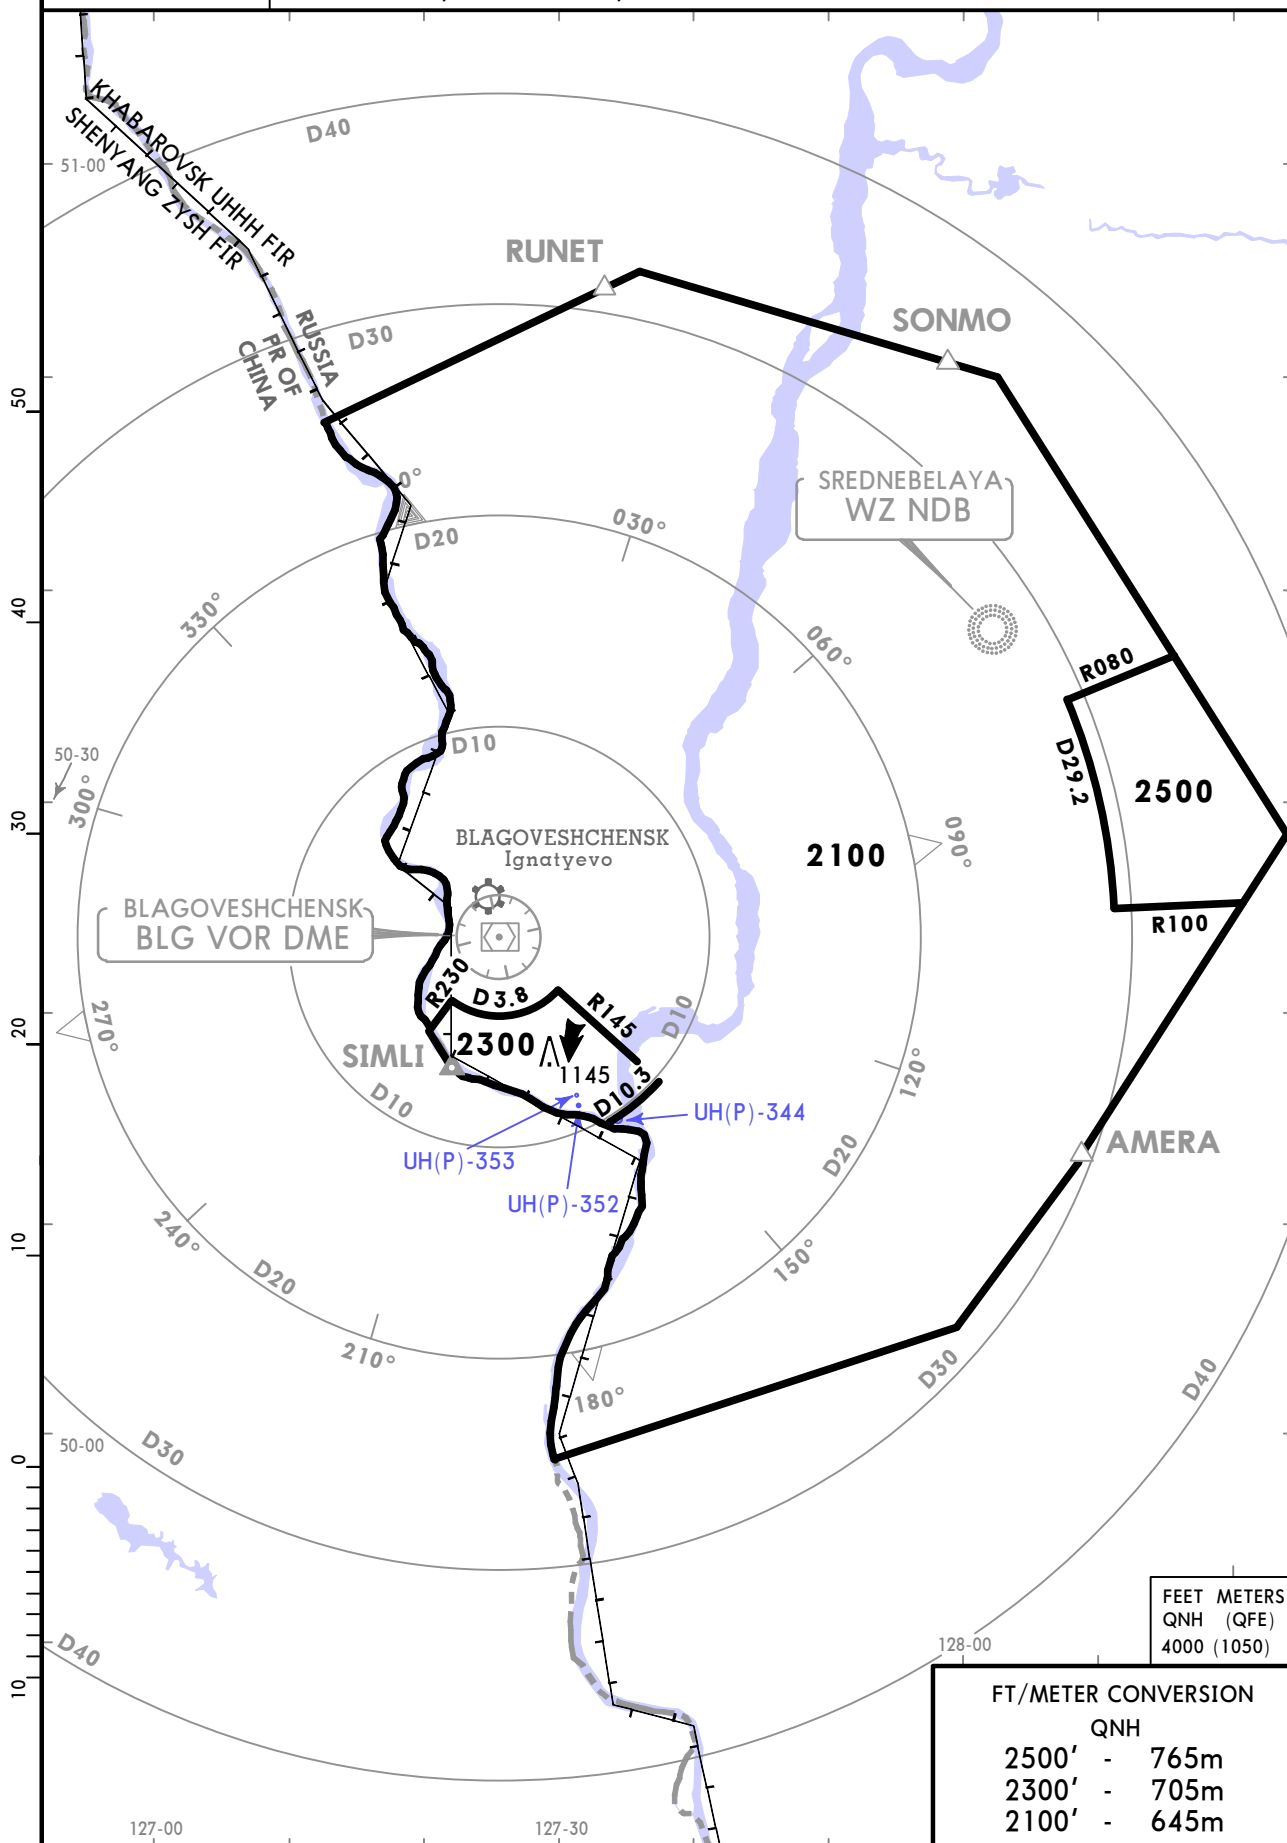

FEET METERS
QNH (QFE)
4000 (1050)

FT/METER CONVERSION	
QNH	
2500'	- 765m
2300'	- 705m
2100'	- 645m

BLAGOVESHCHENSK, RUSSIA

RNAV STAR

ATIS 126.4	Apt Elev 648
BLAGOVESHCHENSK Tower 127.2	


Alt Set: hPa (MM on request)
Trans level: FLO50
FLO60 when QNH is less than 1013 hPa (760 mm)
FLO70 when QNH is less than 977 hPa (733 mm)

- RNAV 1 GNS5 required
- Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
 - STAR is assigned by ATC for calculation of time of descent from Flt by flight crew.
 - Descent shall be executed only to the Flt/altitude cleared by ATC.
 - When establishing contact with TWR in descent, report current Fl and Flt to be reached.
 - If no information available or if unable to MAINTAIN RNAV (GNS5) STAR and/or APCH procedure, report it to TWR and request vectoring for arrival and/or approach.

**AMERA 2G [AMER2G]
AMERA 2W [AMER2W]
RUNET 2G [RUNE2G]
SIMLI 2G [SIML2G]
SIMLI 2W [SIML2W]
WZ 2G [WZ2G]
WZ 2W [WZ2W]
RNAV ARRIVALS
(RWY 18)**

LOST COMMS
Refer to 10-1P Pages.
LOST COMMS
LOST COMMS

FEET	METERS
QNH (1050)	QFE (750)
4000	3000
3000	(750)

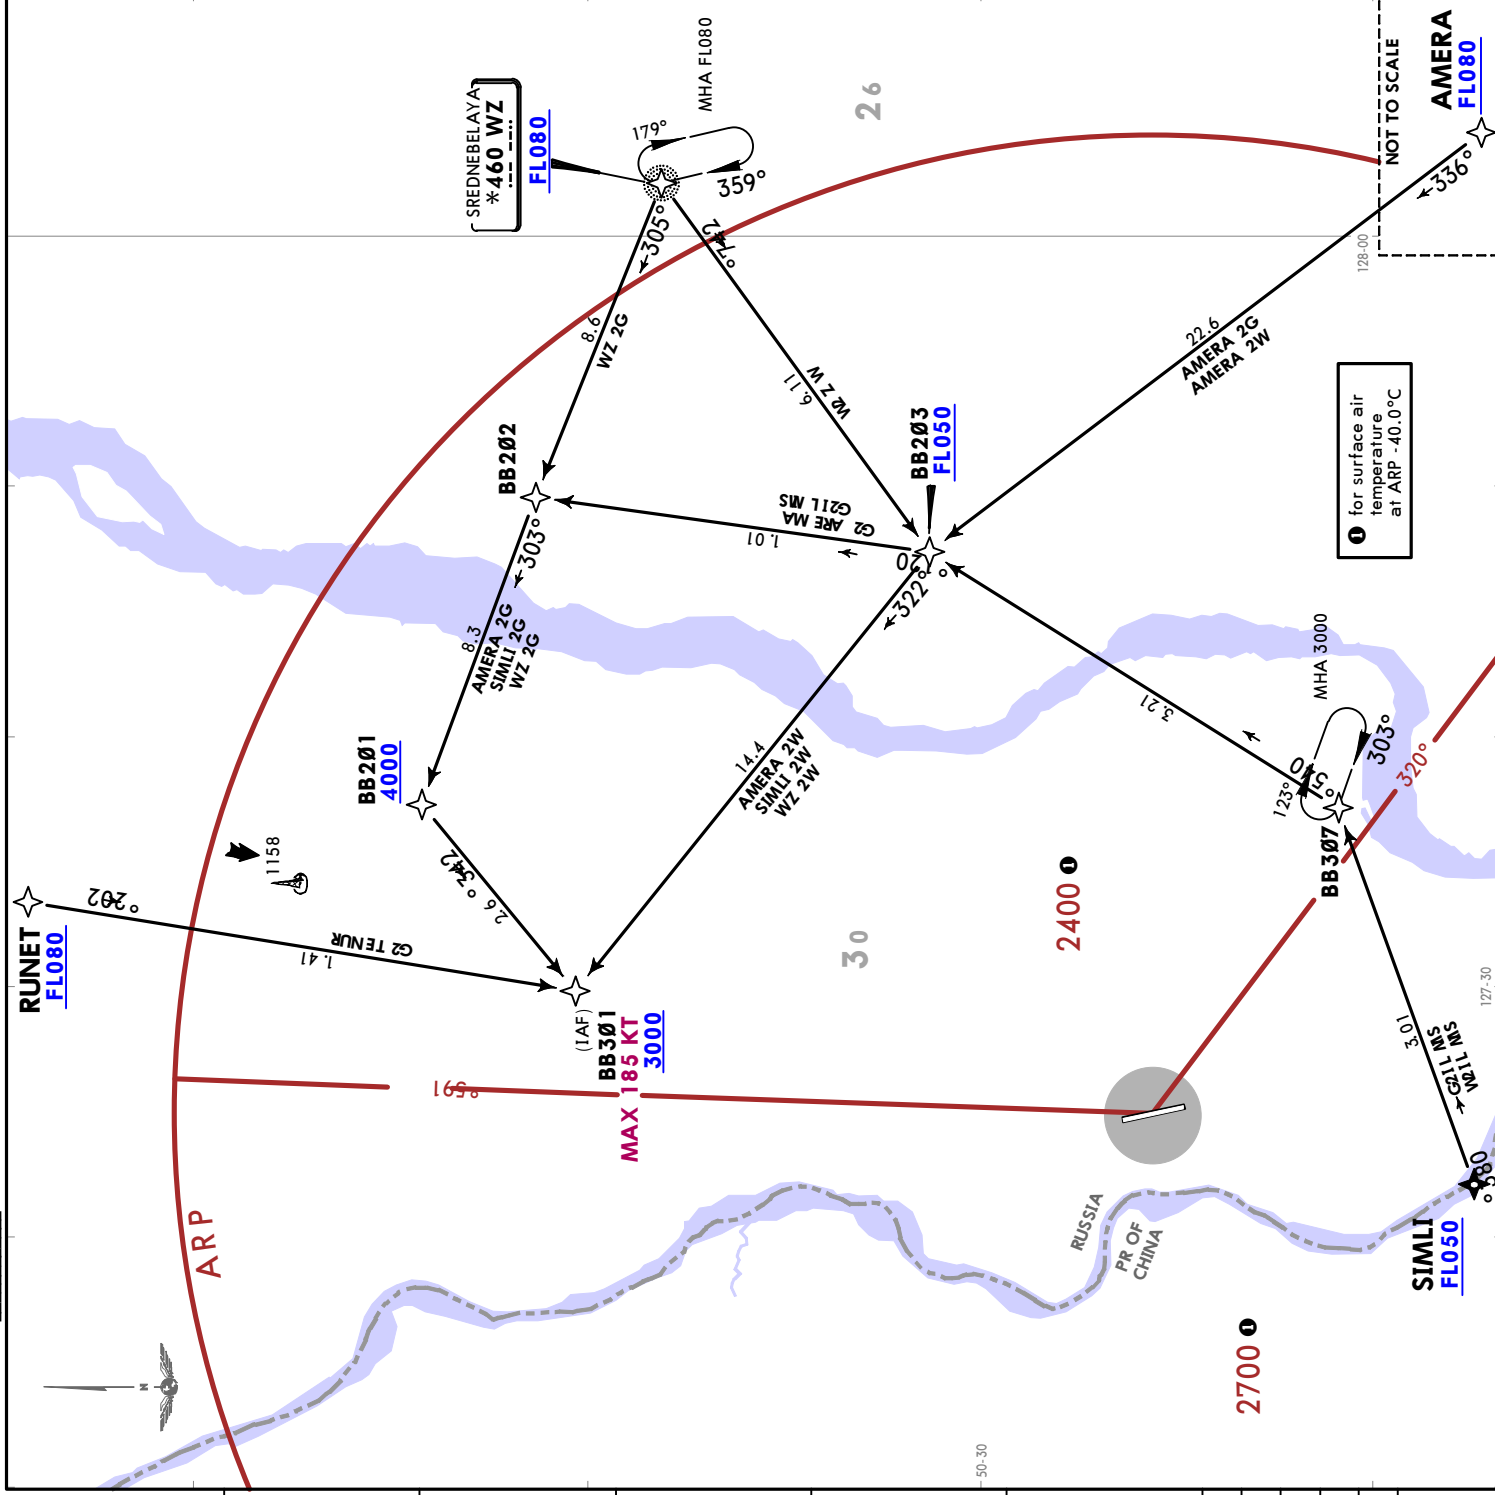


UHHB/BQS
IGNATYEV

JEPPESEN
5 JUL 24
Eff 11 Jul 10-2

CHANGES: RWY 18L/R & 36L/R replaced by 18/36. RNAV STARs renumbered & revised. chart reindexed.

ATIS 126.4	Apt Elev 648								
BLAGOVESHCHENSK Tower 127.2									
Alt Set: hPa (MM on request) Trans level: FL050 FL060 when QNH is less than 1013 hPa (760 mm) FL070 when QNH is less than 977 hPa (733 mm)									
RNAV 1 GNSS required									
<ol style="list-style-type: none"> 1. Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring. 2. STAR is assigned by ATC for calculation of time of descent from FL by flight crew. 3. Descent shall be executed only to the FL/altitude cleared by ATC. 4. When establishing contact with TWR in descent, report current FL and FL to be reached. 5. If no information available or if unable to MAINTAIN RNAV (GNSS) STAR and/or APCH procedure, report it to TWR and request vectoring for arrival and/or approach. 									
<p>AMERA 2H [AMER2H] AMERA 3X [AMER3X] RUNET 2H [RUNE2H] RUNET 2X [RUNE2X] SIMLI 3H [SIML3H] WZ 2H [WZ2H] RNAV ARRIVALS (RWY 36)</p>									
<p>LOST COMMS Refer to 10-1P Pages.</p>	<table border="1"> <tr> <th>FEET</th> <th>METERS</th> </tr> <tr> <td>QNH (QFE)</td> <td></td> </tr> <tr> <td>4000 (1050)</td> <td></td> </tr> <tr> <td>3000 (720)</td> <td></td> </tr> </table>	FEET	METERS	QNH (QFE)		4000 (1050)		3000 (720)	
FEET	METERS								
QNH (QFE)									
4000 (1050)									
3000 (720)									

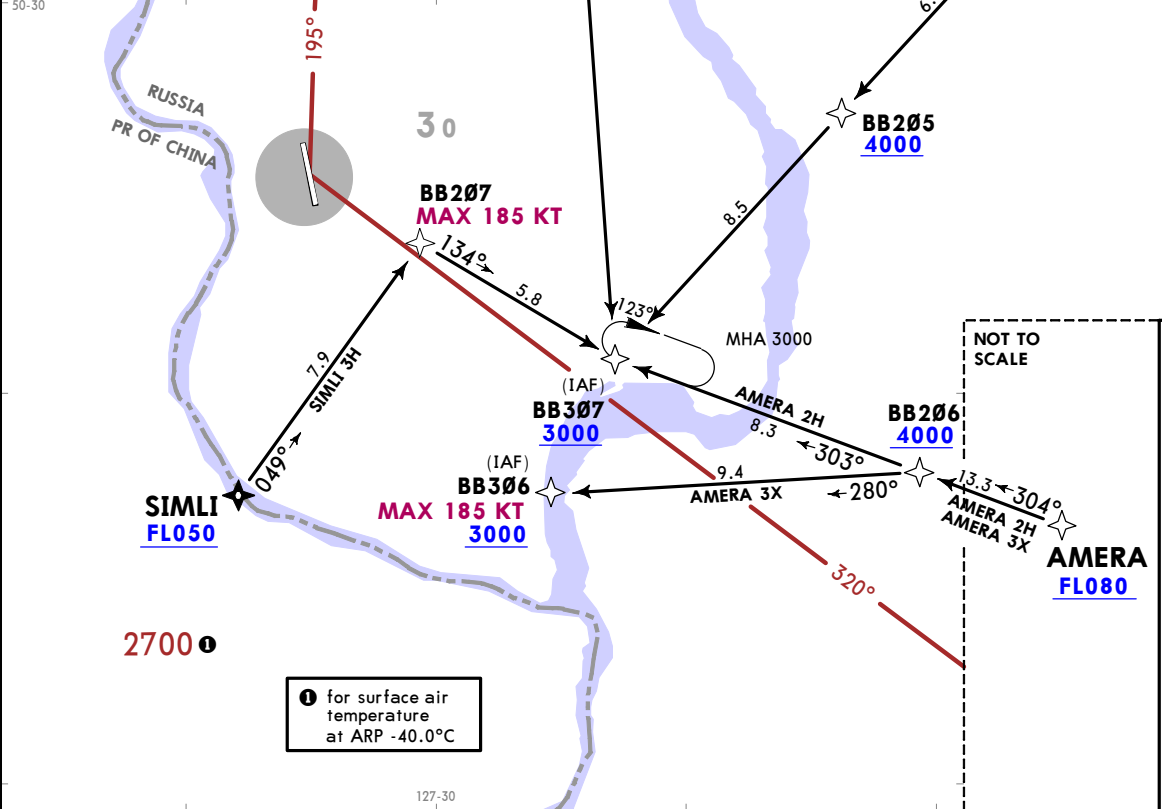

SREDNEBELAYA *460 WZ

FL080

MHA FL080

26

30

320°

NOT TO SCALE

AMERA 2H [AMER2H]
AMERA 3X [AMER3X]
RUNET 2H [RUNE2H]
RUNET 2X [RUNE2X]
SIMLI 3H [SIML3H]
WZ 2H [WZ2H]
RNAV ARRIVALS (RWY 36)

ATIS 126.4	Apt Elev 648
BLAGOVESHCHENSK Tower 127.2	

Alt Set: hPa (MM on request)
Trans level: FLO50


FLO60 when QNH is less than 1013 hPa (760 mm)
FLO70 when QNH is less than 977 hPa (733 mm)

1. DME required.
2. Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
3. STAR is assigned by ATC for calculation of time of descent from FL by flight crew.
4. Descent shall be executed only to the FL/altitude cleared by ATC.
5. When establishing contact with TWR in descent, report current FL and FL to be reached.

**AMERA 2J [AMER2J]
WZ 2J [WZ2J]
ARRIVALS
(RWYS 18, 36)
UNDER RADAR CONTROL**

LOST COMMS ▼ LOST COMMS
Refer to 10-1P Pages.
LOST COMMS ▲ LOST COMMS

(RWY 18)	(RWY 36)
FEET METERS	FEET METERS
QNH (QFE)	QNH (QFE)
4000 (1050)	4000 (1050)
3000 (750)	3000 (720)

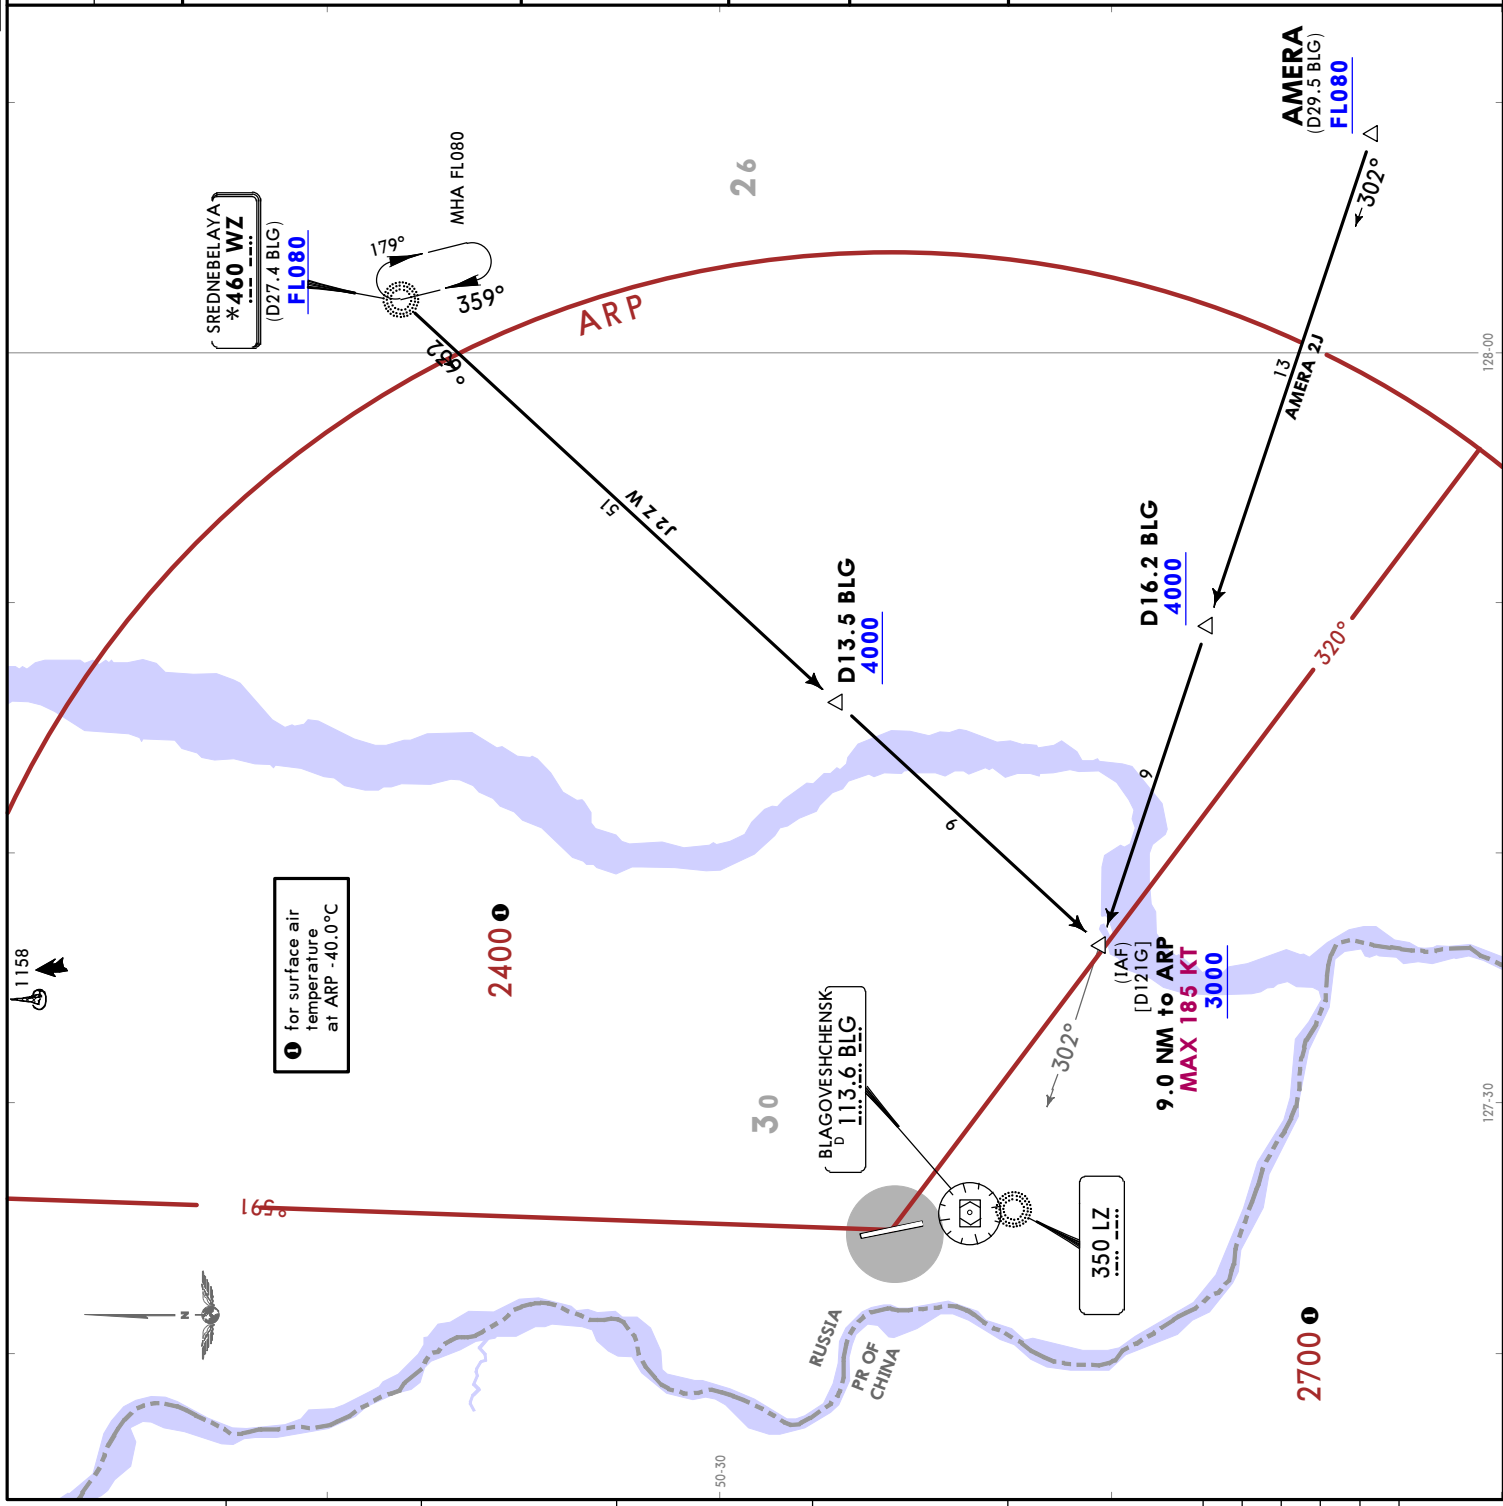

ATIS 126.4	Apt Elev 648
BLAGOVESHCHENSK Tower 127.2	

Alt Set: hPa (MM on request)
Trans level: FLO50
FLO60 when QNH is less than 1013 hPa (760 mm)
FLO70 when QNH is less than 977 hPa (733 mm)

- DME required.
- Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
- STAR is assigned by ATC for calculation of time of descent from FL by flight crew.
- Descent shall be executed only to the FL/altitude cleared by ATC.
- When establishing contact with TWR in descent, report current FL and FL to be reached.

**AMERA 2U [RUNE2U]
RUNET 2U [RUNE2U]
WZ 2U [WZ2U]
ARRIVALS
(RWY 18)
UNDER RADAR CONTROL**

LOST COMMS	LOST COMMS	COMMS
LOST COMMS	LOST COMMS	LOST COMMS
Refer to 10-1P Pages.		

1 for surface air temperature at ARP -40.0°C

FEET METERS
QNH (QFE) 4000 (1050)
3000 (750)

BLAGOVESHCHENSK
D 113.6 BLG


350 LZ

2700

42

50-30


127-00

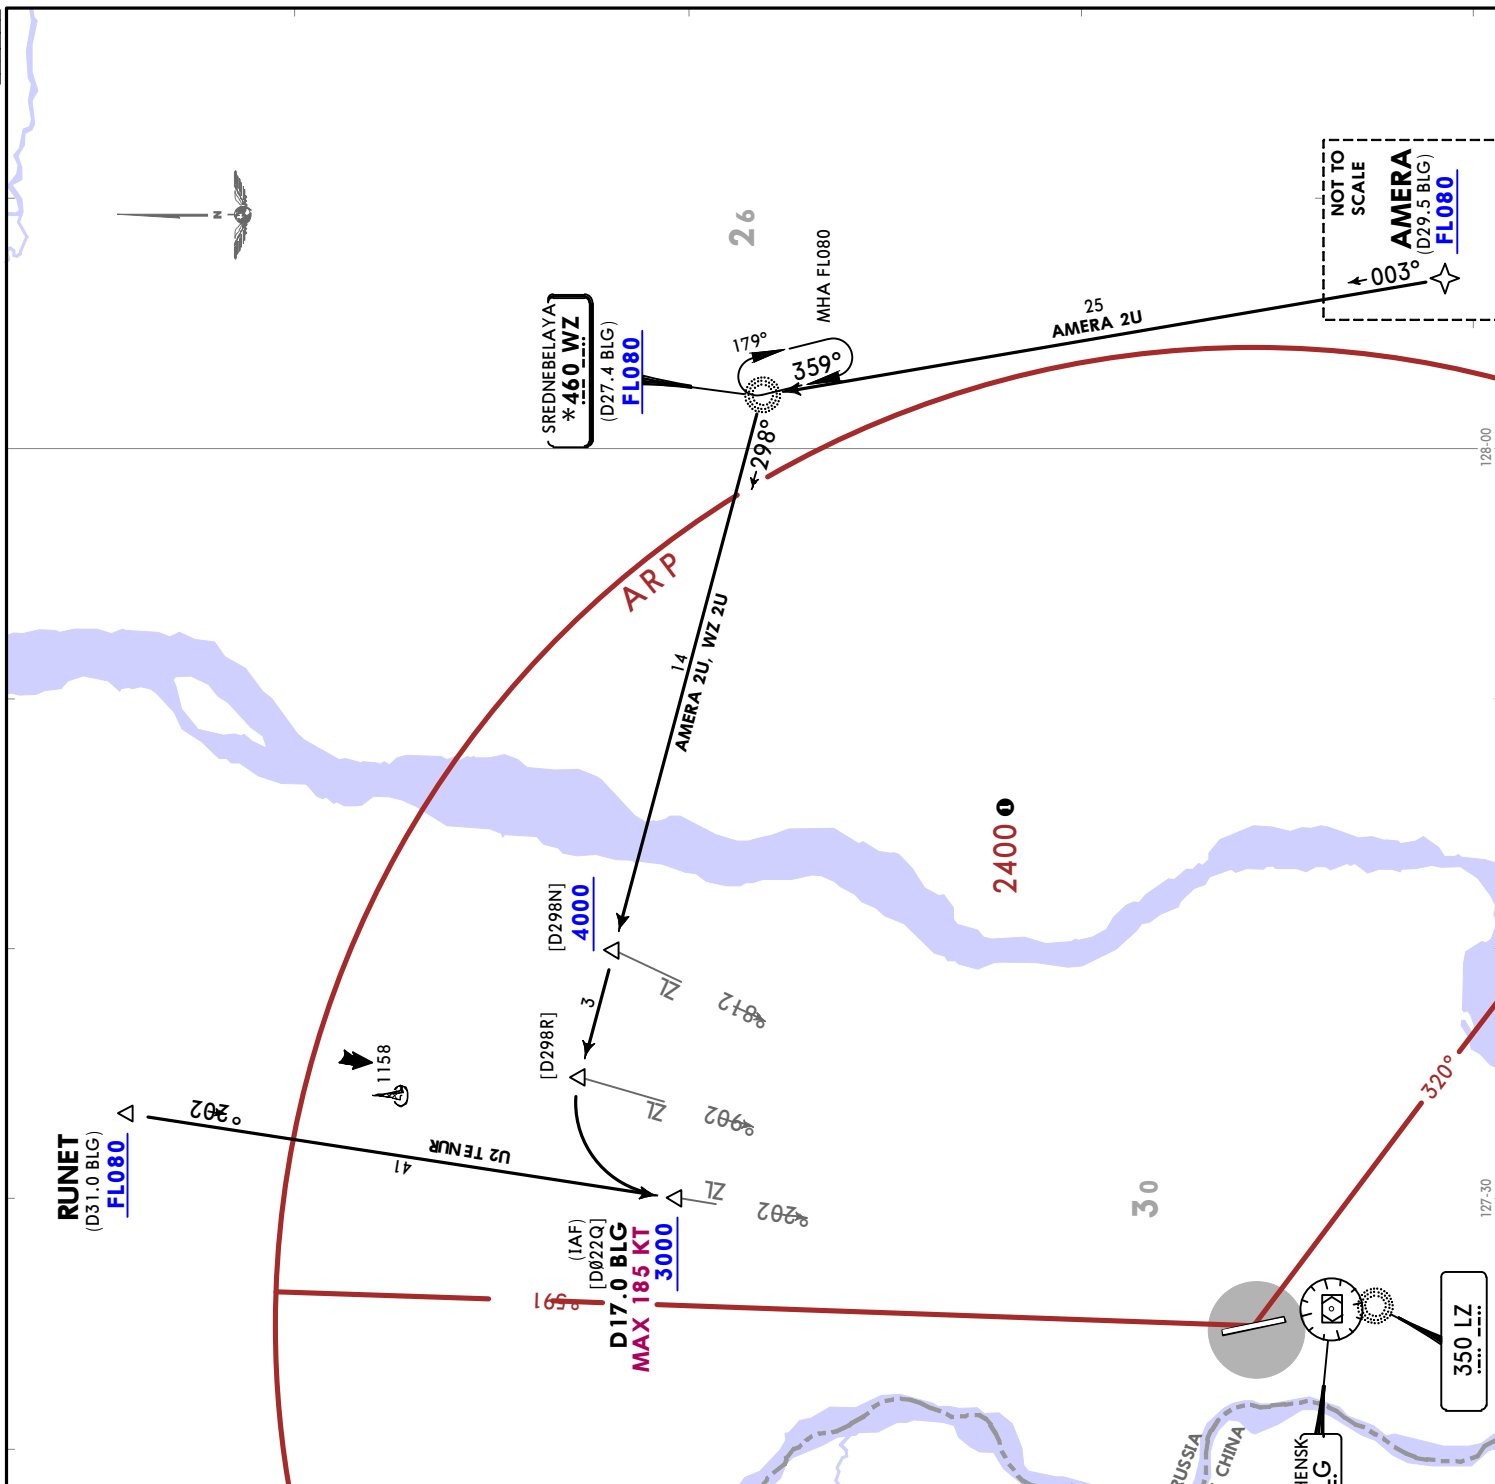

UHBB/BQS
IGNATYEVO

5 JUL 24 10-2E Eff. 11 Jul

JEPPESEN
BLAGOVESHCHENSK, RUSSIA
STAR

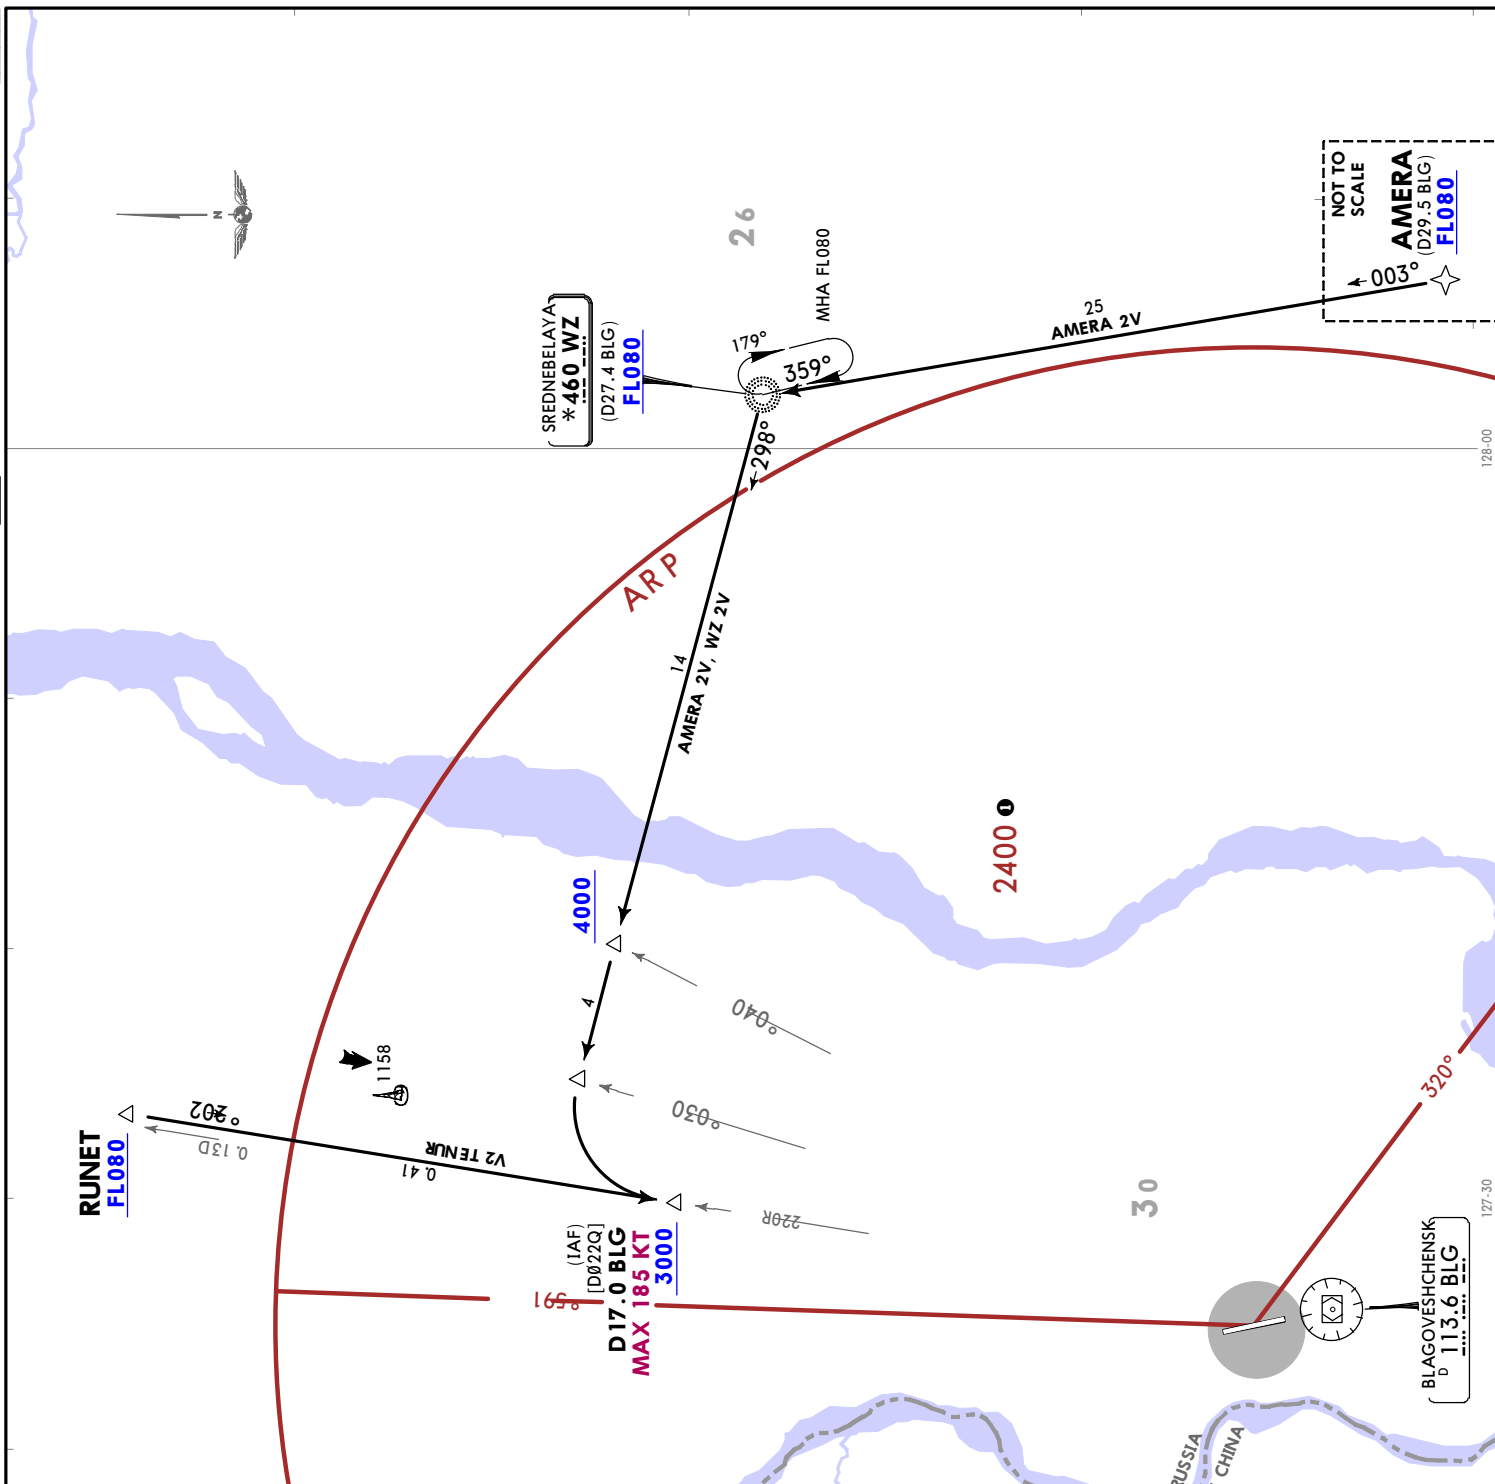

ATIS
126.4

BLAGOVESHCHENSK
Tower
127.2

Apt Elev
648

Alt Set: hPa (MM on request)
Trans level: FL050
FL060 when QNH is less than 1013 hPa (760 mm)
FL070 when QNH is less than 977 hPa (733 mm)

1. DME required.
2. Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
3. STAR is assigned by ATC for calculation of time of descent from FL by flight crew.
4. Descent shall be executed only to the FL/altitude cleared by ATC.
5. When establishing contact with TWR in descent, report current FL and FL to be reached.

AMERA 2V [AMER2V]
RUNET 2V [RUNE2V]
WZ 2V [WZ2V]
ARRIVALS
(RWY 18)
UNDER RADAR CONTROL

FEET	METERS
QNH	(QFE)
4000	(1050)
3000	(750)

LOST COMMS
Refer to 10-IP Pages.

2700

42

2400

30

320°

202°

0.13D

0.41

V2 TENUR

1158

4000

3000

D17.0 BLG [D022Q]
MAX 185 KT

229R

0.40

0.30

229R

179°

359°

MHA FL080

25
AMERA 2V

26

NOT TO SCALE
AMERA
(D29.5 BLG)
FL080

003°

RUSSIA
PR OF CHINA

BLAGOVESHCHENSK
D 113.6 BLG

127-30

128-00

127-00

128-00

ATIS 126.4	Apt Elev 648
BLAGOVESHCHENSK Tower 127.2	


Alt Set: hPa (MM on request)
Trans level: FL050
FL060 when QNH is less than 1013 hPa (760 mm)
FL070 when QNH is less than 977 hPa (733 mm)

- DME required.
- Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
- STAR is assigned by ATC for calculation of time of descent from FL by flight crew.
- Descent shall be executed only to the FL/altitude cleared by ATC.
- When establishing contact with TWR in descent, report current FL and FL to be reached.

**RUNET 2E [RUNE2E]
SIMLI 2E [SIML2E]
ARRIVALS
(RWY 36)
UNDER RADAR CONTROL**

LOST COMMS	LOST COMMS	COMMS
Refer to 10-1P Pages.		
LOST COMMS	LOST COMMS	COMMS

FEET	METERS
4000	(1050)
3000	(720)

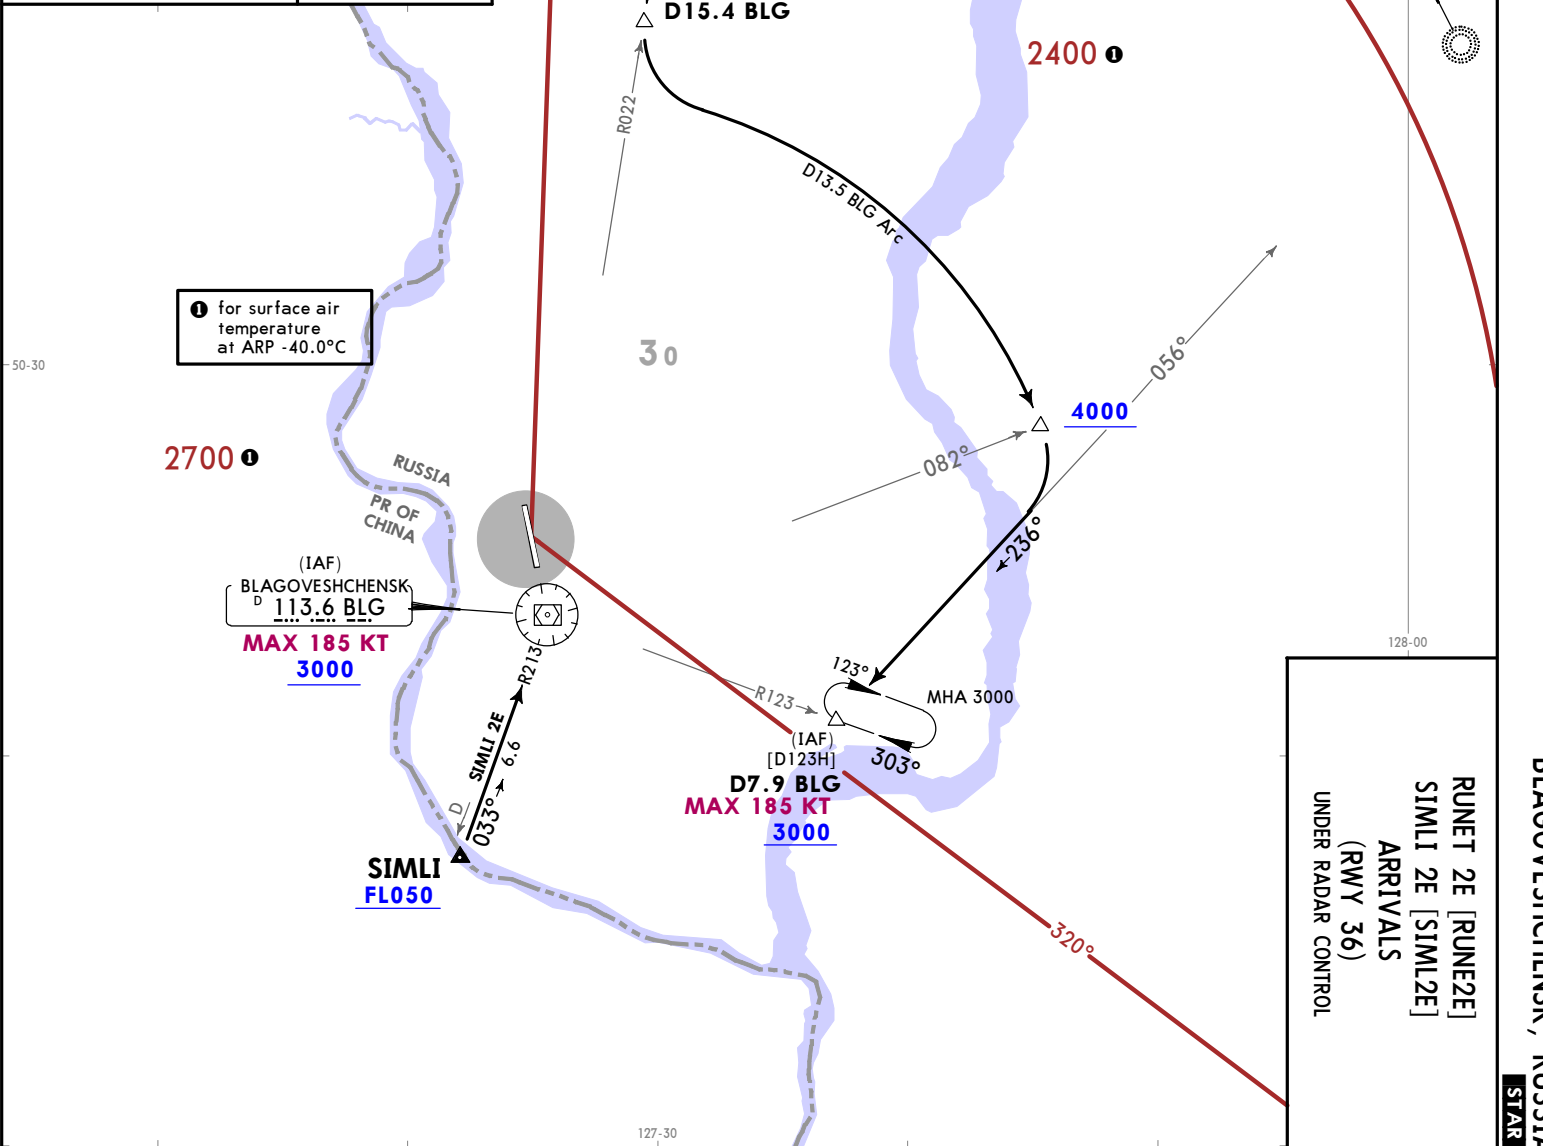

CHANGES: RWYs 18L/R & 36L/R replaced by 18/36. STARS revised & redesignated, chart reindexed.

© JEPPESSEN, 2024. ALL RIGHTS RESERVED.

CHANGES: RWYs 18L/R & 36L/R replaced by 18/36; STARs revised & redesignated; chart redesigned.

ATIS 126.4	Apt Elev 648
BLAGOVESHCHENSK Tower 127.2	


Alt Set: hPa (MM on request)
Trans level: FL050
FL060 when QNH is less than 1013 hPa (760 mm)
FL070 when QNH is less than 977 hPa (733 mm)

- DME required.
- Descent and approach are executed along the established STAR and APCH procedures, applying 'Direct to' procedure or by RADAR vectoring.
- STAR is assigned by ATC for calculation of time of descent from FL by flight crew.
- Descent shall be executed only to the FL/altitude cleared by ATC.
- When establishing contact with TWR in descent, report current FL and FL to be reached.

**RUNET 2J [RUNE2J]
SIMLI 2J [SIML2J]
ARRIVALS
(RWY 36)
UNDER RADAR CONTROL**

COMMS	LOST COMMS	LOST COMMS	COMMS
Refer to 10-1P Pages.			
LOST COMMS	LOST COMMS	LOST COMMS	LOST COMMS

FEET	METERS
4000	(1050)
3000	(720)

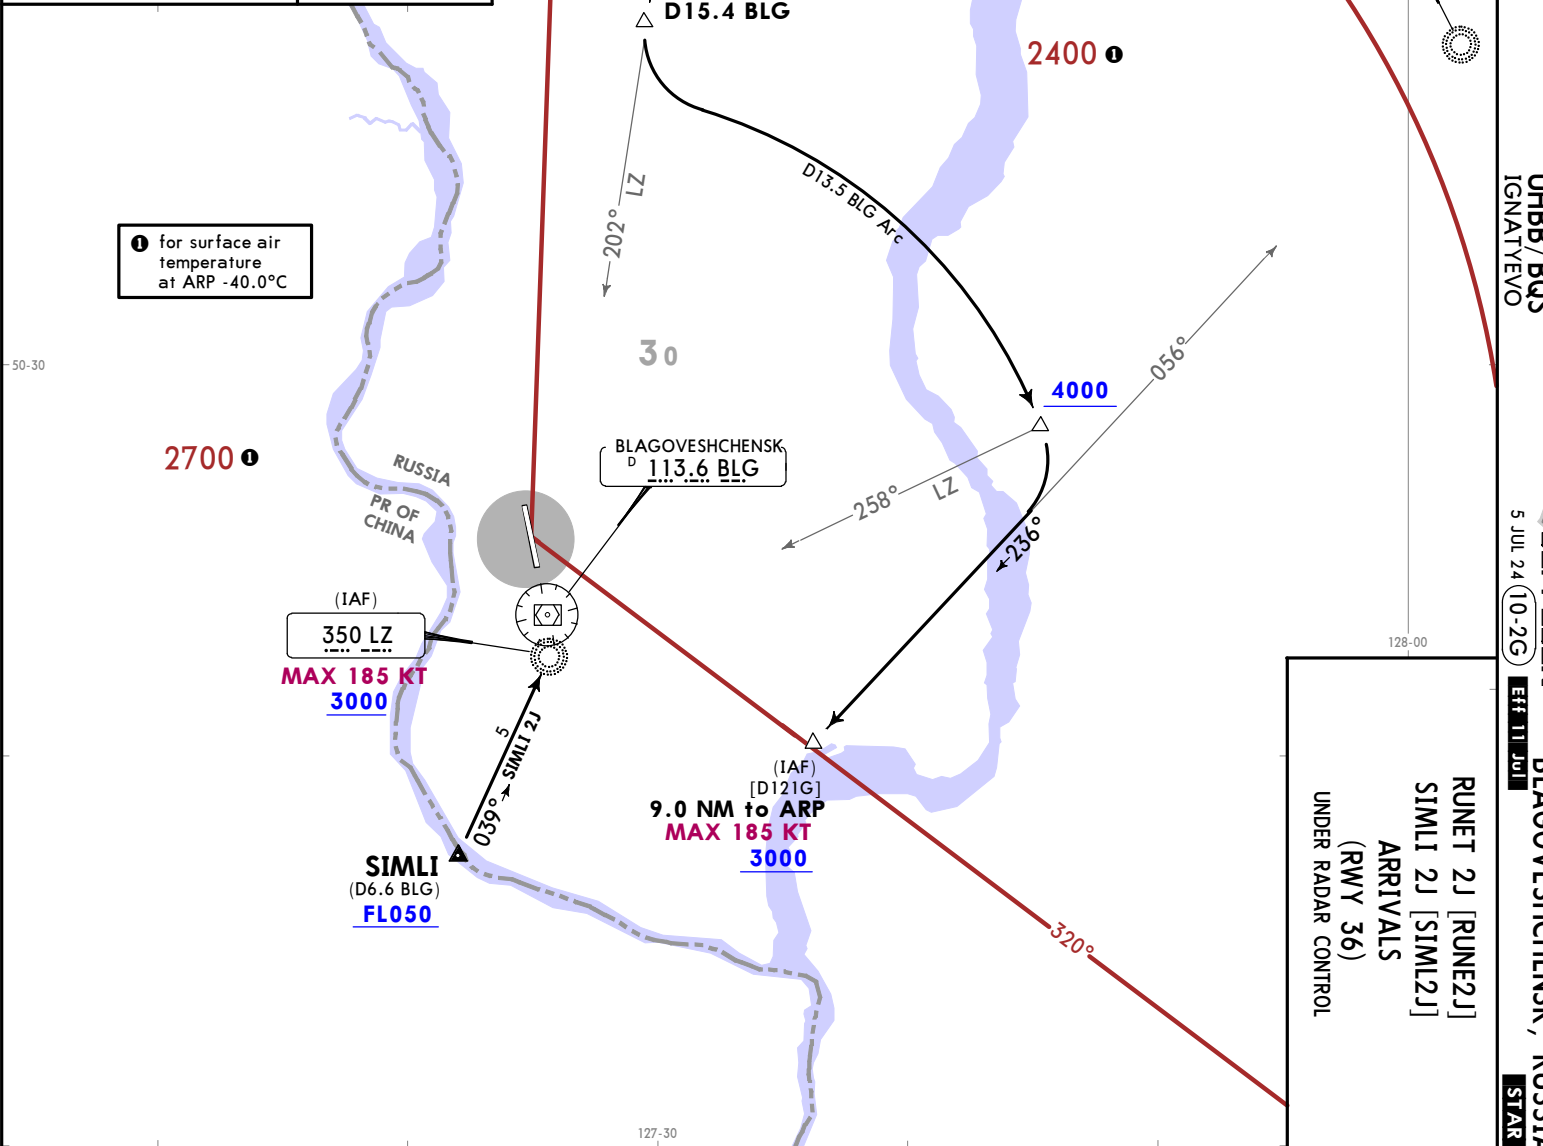

UHHB/BQS
IGNATIEVO
JEPPesen
5 JUL 24 10-20
ET 11 JUL
BLAGOVESHCHENSK, RUSSIA
STAR

© JEPPesen, 2024. ALL RIGHTS RESERVED.

BLAGOVESHCHENSK, RUSSIA

RNAV SID


BLAGOVESHCHENSK Tower 127.2	Apt Elev 648
Trans alt: 4000 QNH (QFE on request)	
RNAV 1 GNSS required	
1. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 2. If no information available or if unable to MAINTAIN RNAV (GNSS) SID, contact TWR and request conventional SID or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	
RUNET 2C [RUNE2C] RUNET 2W [RUNE2W] RUNET 2Y [RUNE2Y] WZ 2C [WZ2C] RNAV DEPARTURES (RWY 18)	
LOST COMMS ▼ LOST COMMS COMMS Refer to 10-IP Pages. LOST COMMS ▲ LOST COMMS	
FEET METERS QNH (QFE) 4000 (1050) 900 (1110)	

These SIDs require a minimum climb gradient of 4.1% up to 900.


Gnd speed-KT	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246

JEPPESEN
 5 JUL 24
 EFF 11 JUL 10-3

UHHB/BQS
 IGNATYEV

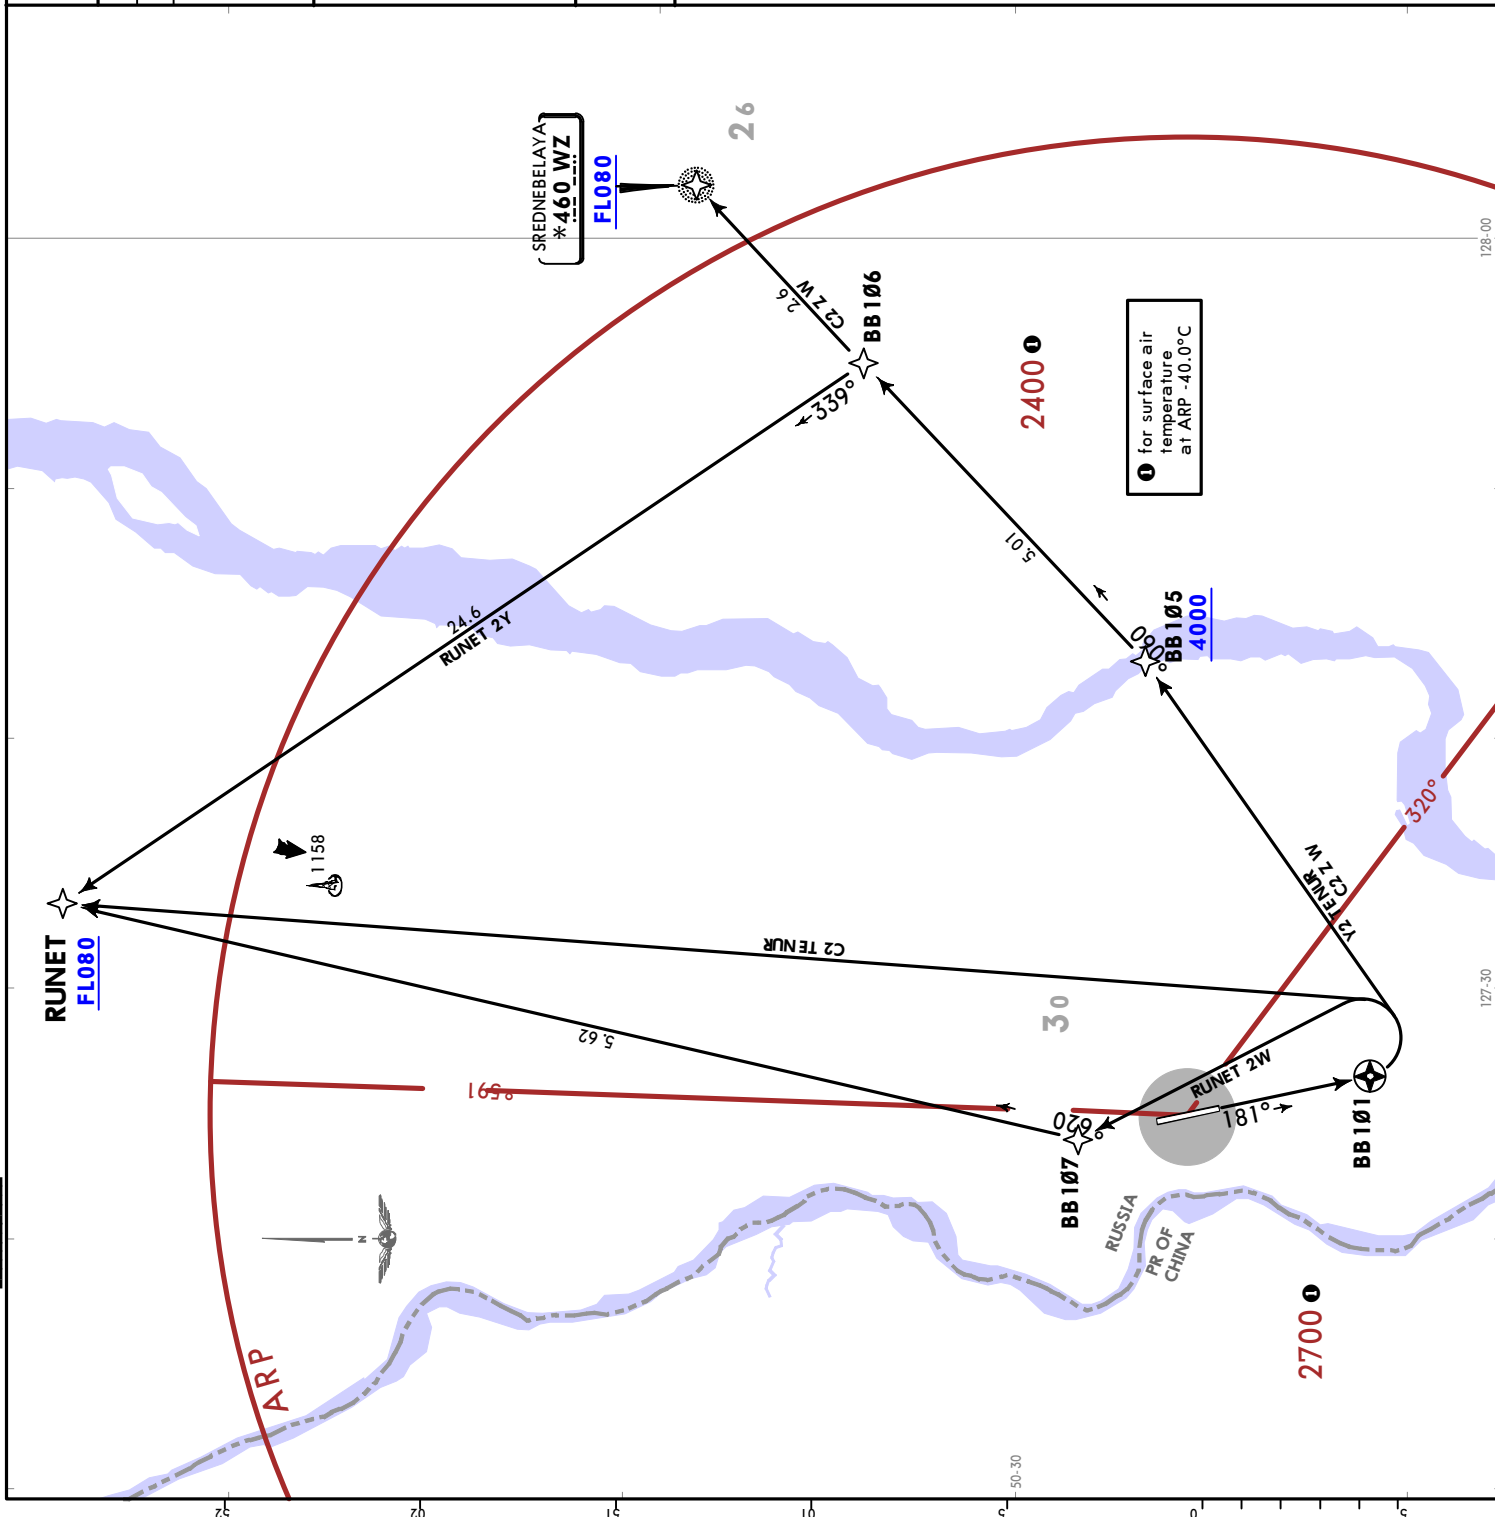

BLAGOVESHCHENSK Tower 127.2	Apt Elev 648
Trans alt: 4000 QNH (QFE on request)	
RNAV 1 GNSS required	
<ol style="list-style-type: none"> Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. If no information available or if unable to MAINTAIN RNAV (GNSS) SID, contact TWR and request conventional SID or RADAR vectoring. Climb only to the altitude/FL cleared by ATC. 	
AMERA 2C [AMER2C] SIMLI 2C [SIML2C] RNAV DEPARTURES (RWY 18)	
LOST COMMS \blacktriangledown LOST COMMS Refer to 10-1P Pages. LOST COMMS \blacktriangleleft LOST COMMS	
FEET METERS QNH (QFE) 4000 (1050) 900 (110)	

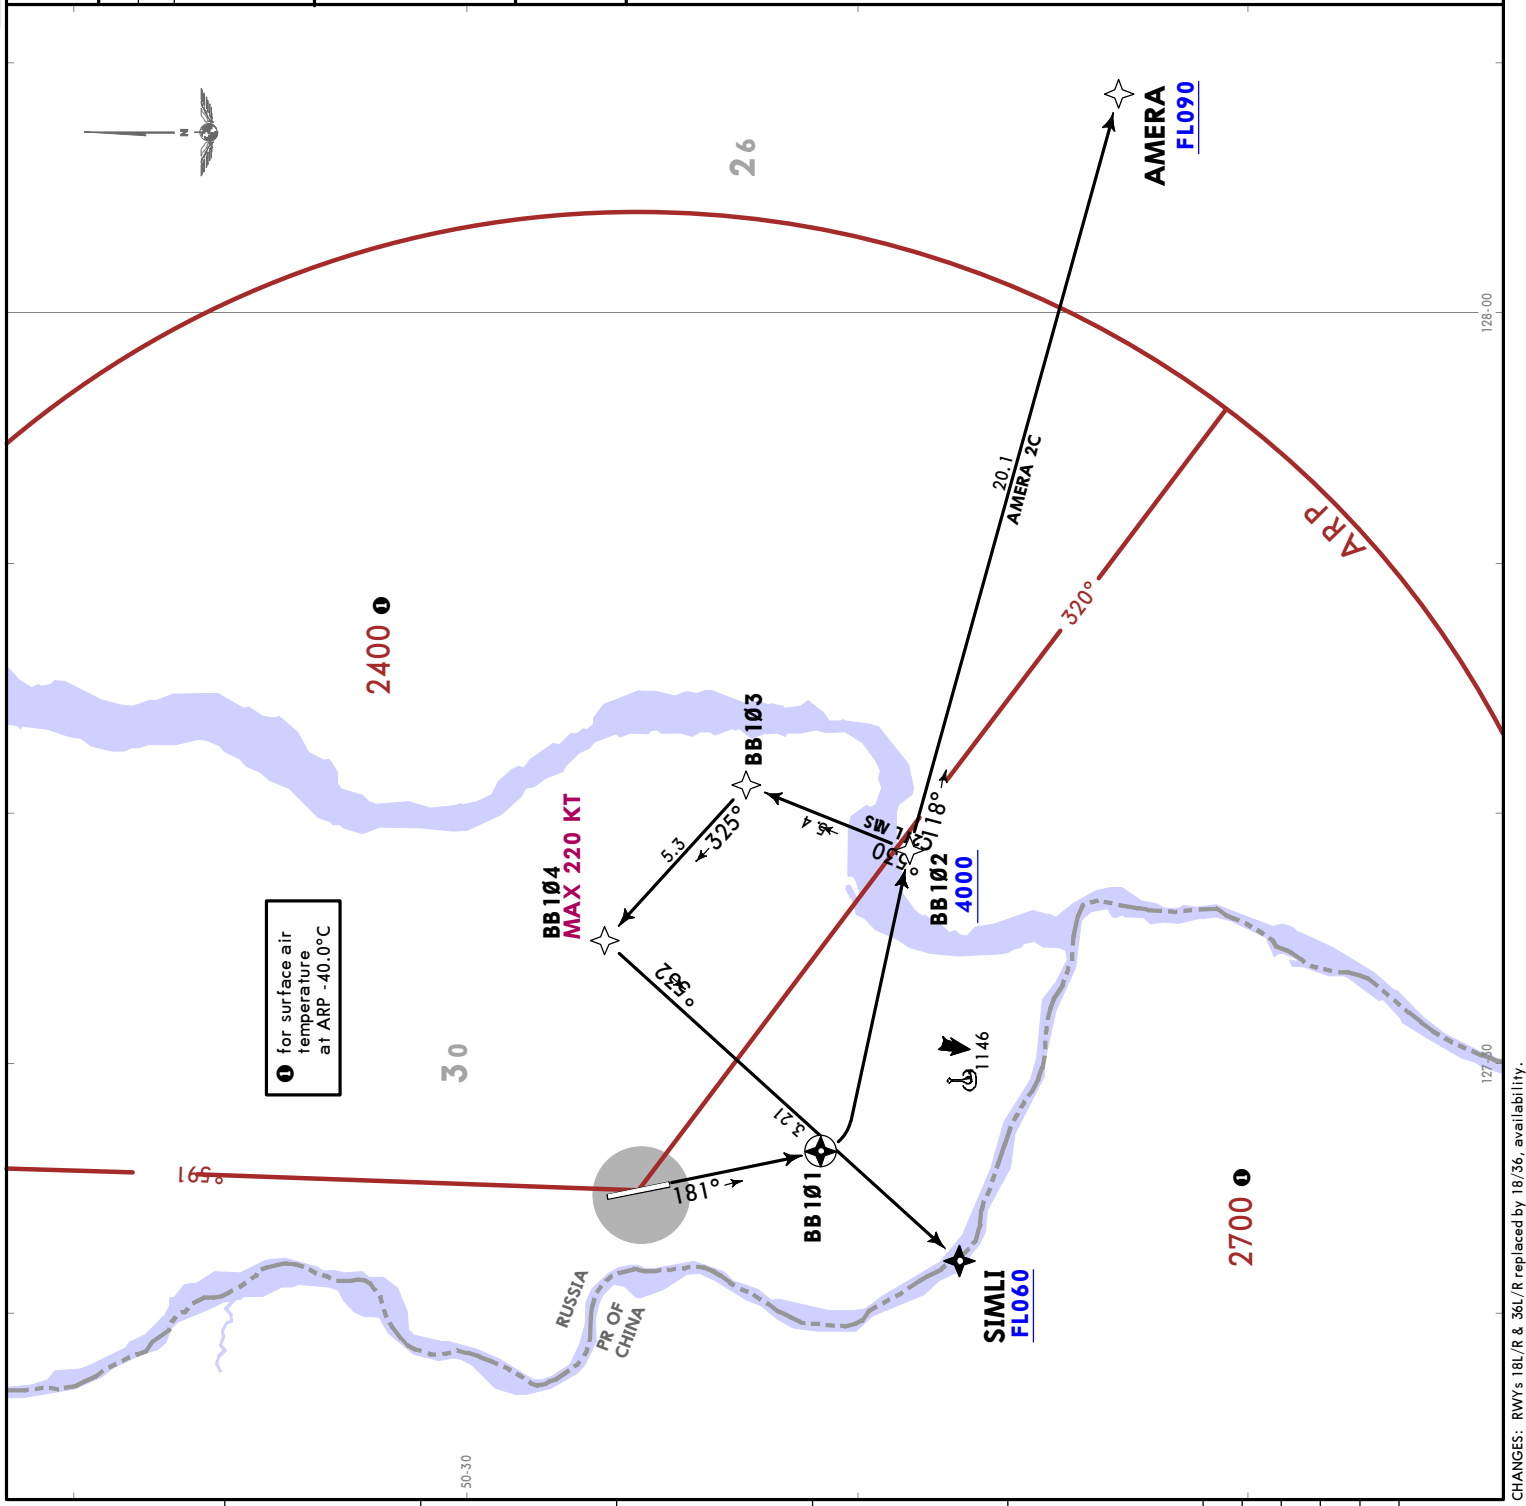


These SIDs require a minimum climb gradient of 4.1% up to 900.


Gnd speed-KT	75	100	150	200	250	300
4.1% V/V (fpm)	311	415	623	830	1038	1246

BLAGOVESHCHENSK, RUSSIA
RNAV SID

BLAGOVESHCHENSK Tower 127.2	Apt Elev 648
Trans alt: 4000 QNH (QFE on request)	
RNAV 1 GNSS required	
1. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 2. If no information available or if unable to MAINTAIN RNAV (GNSS) SID, contact TWR and request conventional SID or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	
AMERA 2D [AMER2D] RUNET 2D [RUNE2D] WZ 2D [WZ2D] WZ 2Y [WZ2Y] RNAV DEPARTURES (RWY 36)	
LOST COMMS ▼ LOST COMMS Refer to 10-1P Pages. LOST COMMS ▲ LOST COMMS MWOC	
FEET METERS QNH (QFE) 4000 (1050)	

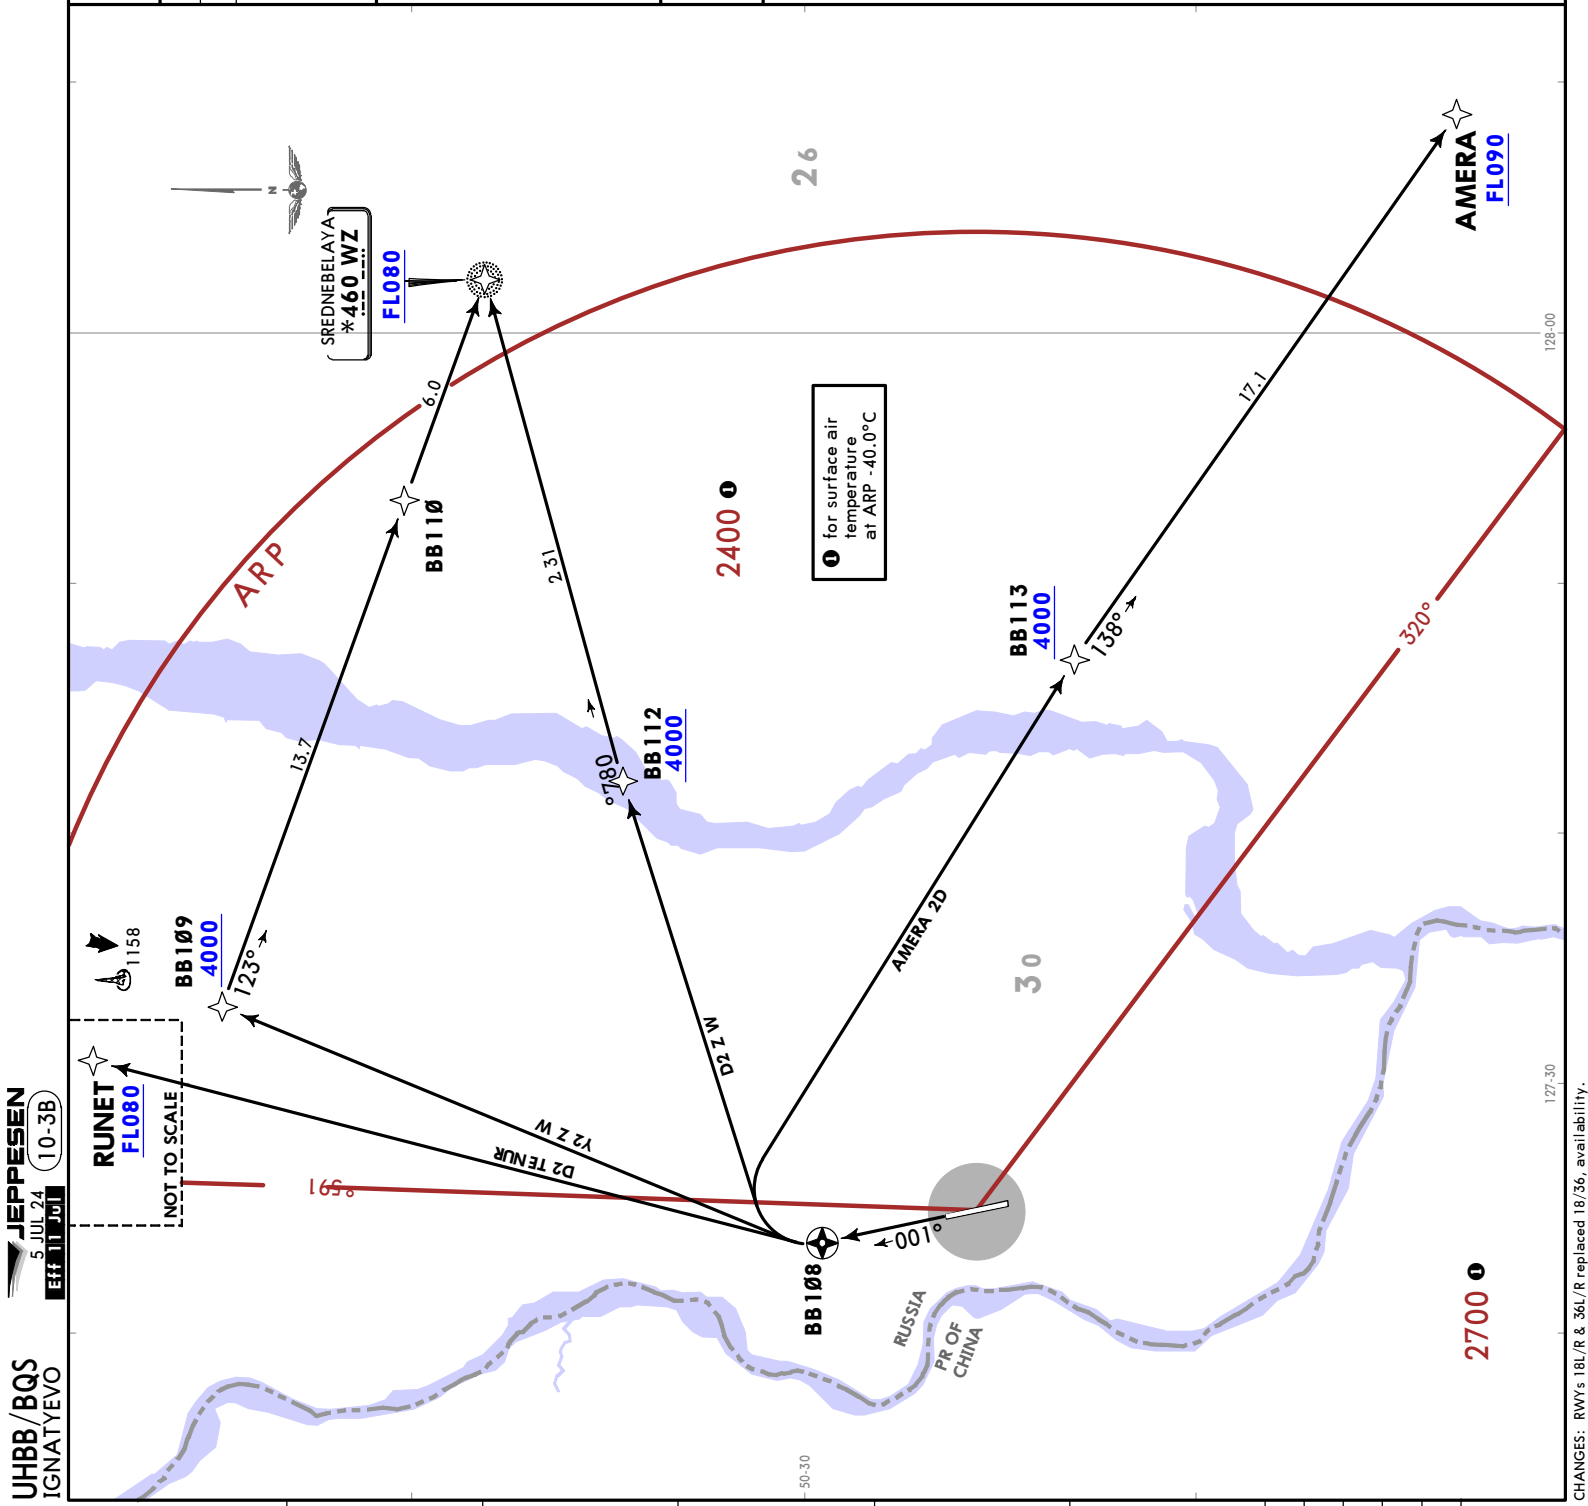


BLAGOVESHCHENSK Tower 127.2	Apt Elev 648
Trans alt: 4000 QNH (QFE on request)	
RNAV 1 GNSS required	
1. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 2. If no information available or if unable to MAINTAIN RNAV (GNSS) SID, contact TWR and request conventional SID or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	
AMERA 2Y [AMER2Y] SIMLI 2D [SIML2D] SIMLI 2Y [SIML2Y] RNAV DEPARTURES (RWY 36)	
LOST COMMS \blacktriangledown LOST COMMS Refer to 10-1P Pages. LOST COMMS \blacktriangleleft LOST COMMS MWDCC	
FEET METERS QNH (QFE) 4000 (1050)	

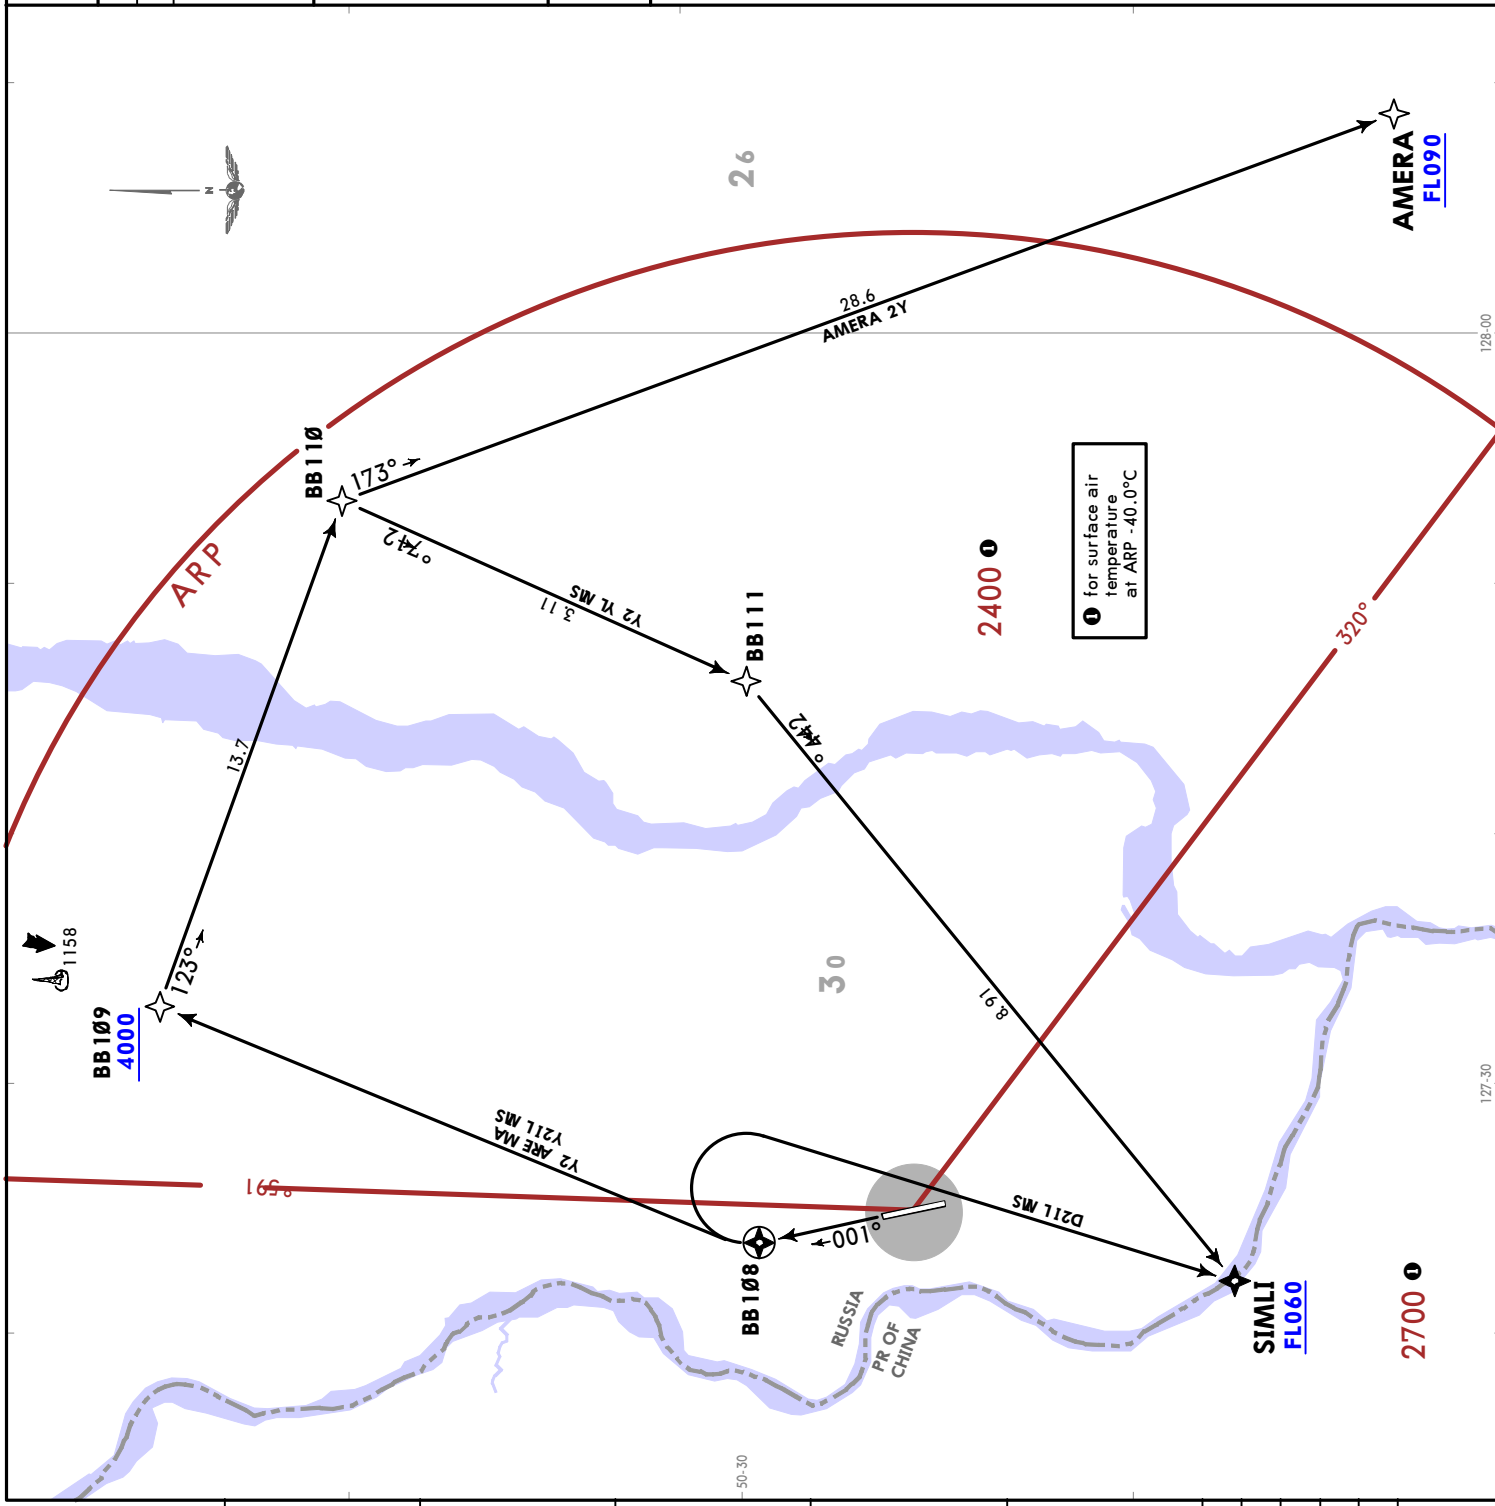

BLAGOVESHCHENSK, RUSSIA

SID

Trans alt: 4000 1. DME required. 2. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	Apt Elev 648
AMERA 2A [AMER2A] RUNET 2A [RUNE2A] RUNET 2Z [RUNEZZ] SIMLI 2A [SIML2A] WZ 2A [WZ2A] DEPARTURES (RWY 18)	COMMMS Refer to 10-1P Pages. LOST COMMMS LOST COMMMS
FEET METERS QNH (QFE) 4000 (1050) 900 (110)	
These SIDs require a minimum climb gradient of 4.1% up to 900.	
	ROUTING AMERA 2A Climb on 181° track to D1.7 BLG, turn LEFT, 099° track, intercept BLG R123, via D16.2 BLG to AMERA. RUNET 2A Climb on 181° track to D1.7 BLG, turn LEFT, 339° track, intercept BLG R022 to RUNET. RUNET 2Z Climb on 181° track to D1.7 BLG, turn LEFT, 087° track, intercept 057° bearing towards WZ, via D13.5 BLG to D24.8 BLG, turn LEFT, intercept 325° bearing from WZ to RUNET. SIMLI 2A Climb on 181° track to D1.7 BLG, turn LEFT to BLG, BLG R2 13 to SIMLI. WZ 2A Climb on 181° track to D1.7 BLG, turn LEFT, 087° track, intercept 057° bearing, via D13.5 BLG to WZ.

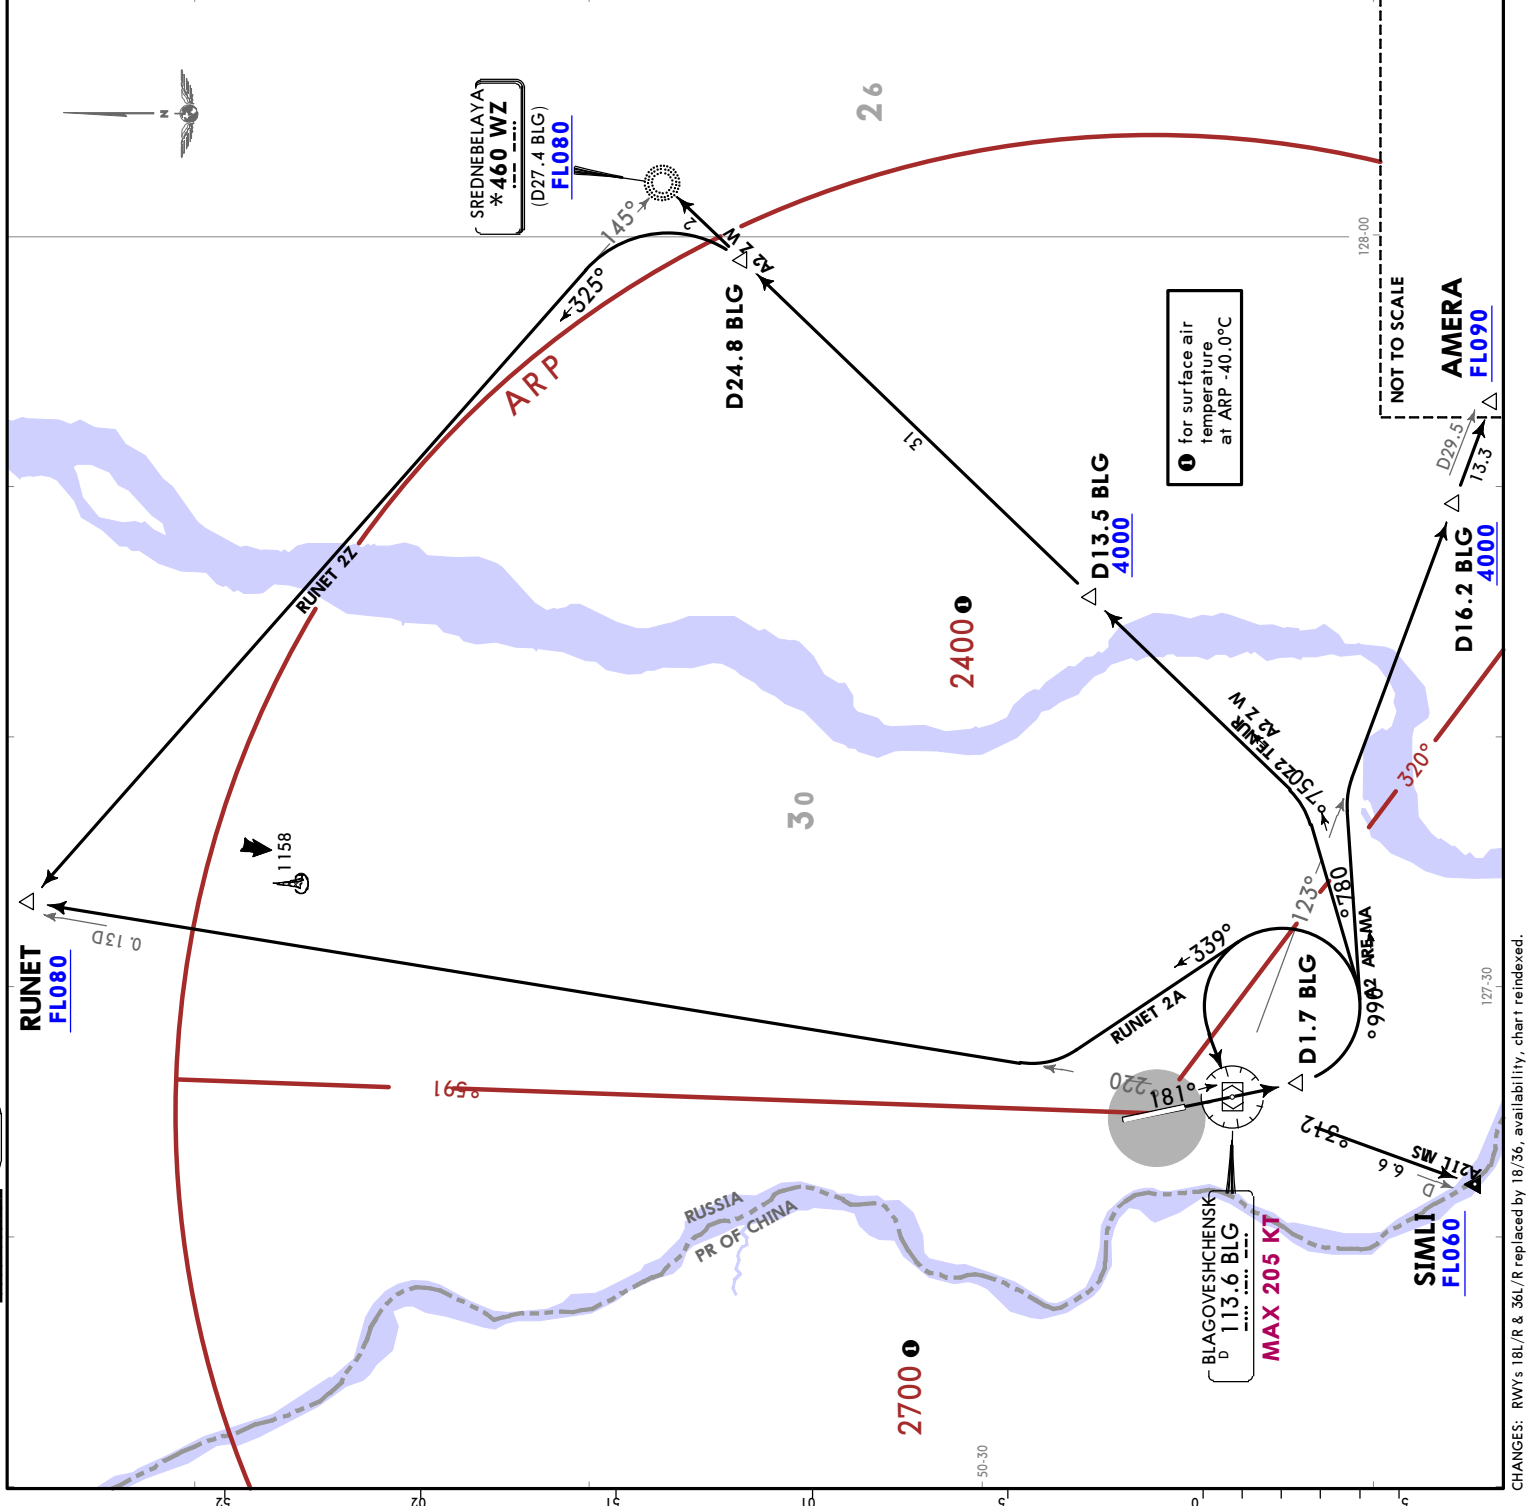


UHHB/BQS
IGNATYEV

JEPPESEN
5 JUL 24
EFF 11 JUL 10-3D

JEPPESEN
 5 JUL 24 10-3E Eff. 11 Jul
UJBB/BQS
 IGNATYEVO

BLAGOVESHCHENSK, RUSSIA
SID

Trans alt: 4000 1. DME required. 2. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	
Apt Elev 648 QNH (QFE on request)	
RUNET 2B [RUNE2B] SIMLI 2B [SIML2B] SIMLI 2Z [SIML2Z] WZ 2B [WZ2B] WZ 2Z [WZ2Z] DEPARTURES (RWY 36)	
LOST COMMS ▼ LOST COMMS Refer to 10-1P Pages. LOST COMMS ▲ LOST COMMS 5 MWDC	
FEET METERS QNH (QFE) 4000 (1050) 1100 (140)	
SID	ROUTING
RUNET 2B	Climb on 001° track to 1100 or above, turn RIGHT, 053° track, intercept BLG R022 to RUNET.
SIMLI 2B	Climb on 001° track to 1100 or above, turn RIGHT to BLG, BLG R123 to SIMLI.
SIMLI 2Z	Climb on 001° track to 1100 or above, turn RIGHT, 053° track, intercept BLG R022 to D20.0 BLG, turn RIGHT, intercept 124° bearing to WZ, 244° bearing from WZ to SIMLI.
WZ 2B	Climb on 001° track to 1100 or above, turn RIGHT, intercept 084° bearing, via D14.6 BLG to WZ.
WZ 2Z	Climb on 001° track to 1100 or above, turn RIGHT, 053° track, intercept R022 BLG to D20.0 BLG, turn RIGHT, intercept 124° bearing to WZ.

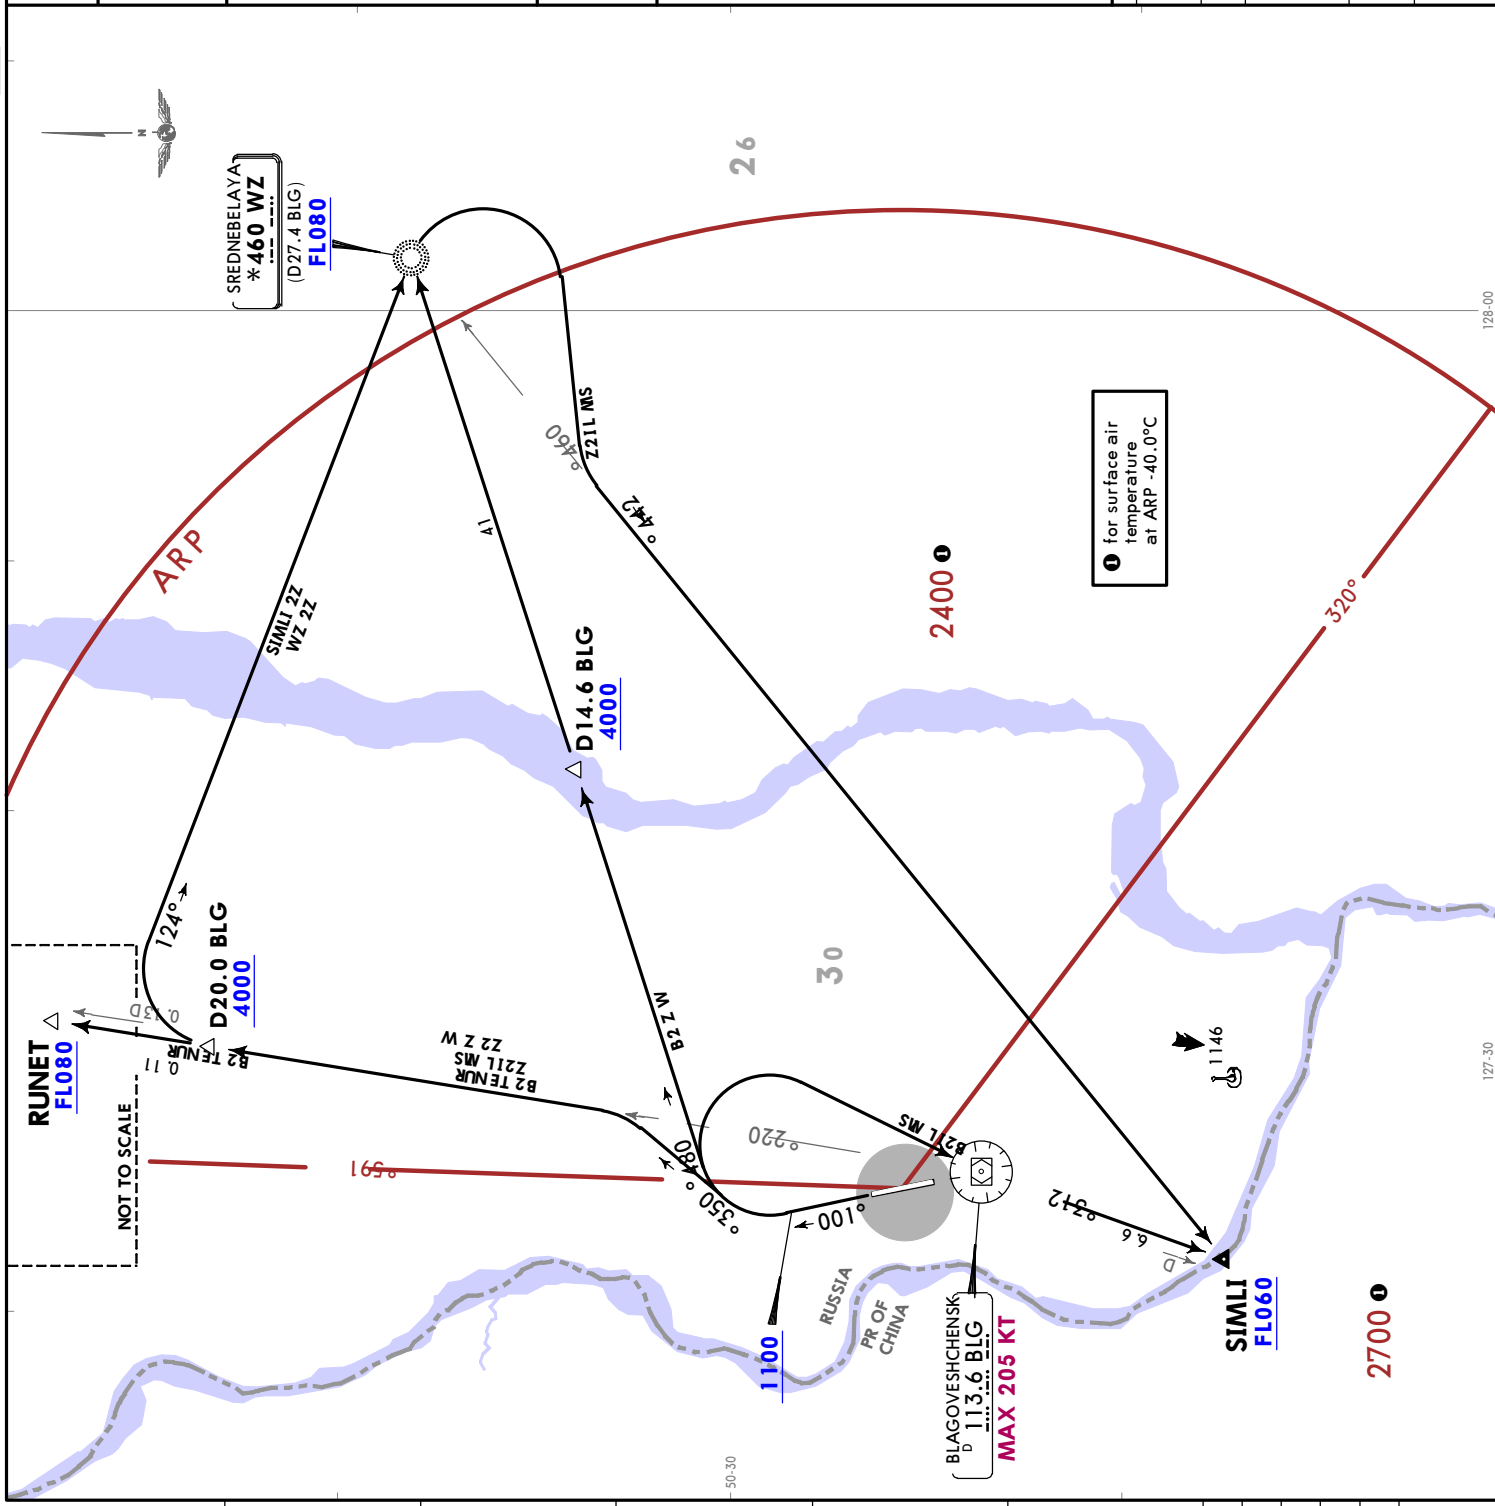


UHBB/BQS
IGNATYEVO

5 JUL 24
Efl 11 JUL 10-3F

JEPPESEN

BLAGOVESHCHENSK, RUSSIA
SID

Apt Elev 648	
Trans alt: 4000 1. DME required. 2. Departures are executed via SID or 'Direct to' procedure or RADAR vectoring. 3. Climb only to the altitude/FL cleared by ATC.	
AMERA 2B [AMER2B] AMERA 2Z [AMER2Z] DEPARTURES (RWY 36)	
LOST COMMS ▼ LOST COMMS Refer to 10-1P Pages. LOST COMMS ▲ LOST COMMS 5 MWOC	
FEET METERS QNH (QFE) 4000 (1050) 1100 (140)	
SID	ROUTING
AMERA 2B	Climb on 001° track to 1100 or above, turn RIGHT, 202° track, intercept BLG R123 to AMERA.
AMERA 2Z	Climb on 001° track to 1100 or above, turn RIGHT, 053° track, intercept BLG R022 to D20.0 BLG, turn RIGHT, intercept 124° bearing to WZ, 183° bearing to AMERA.

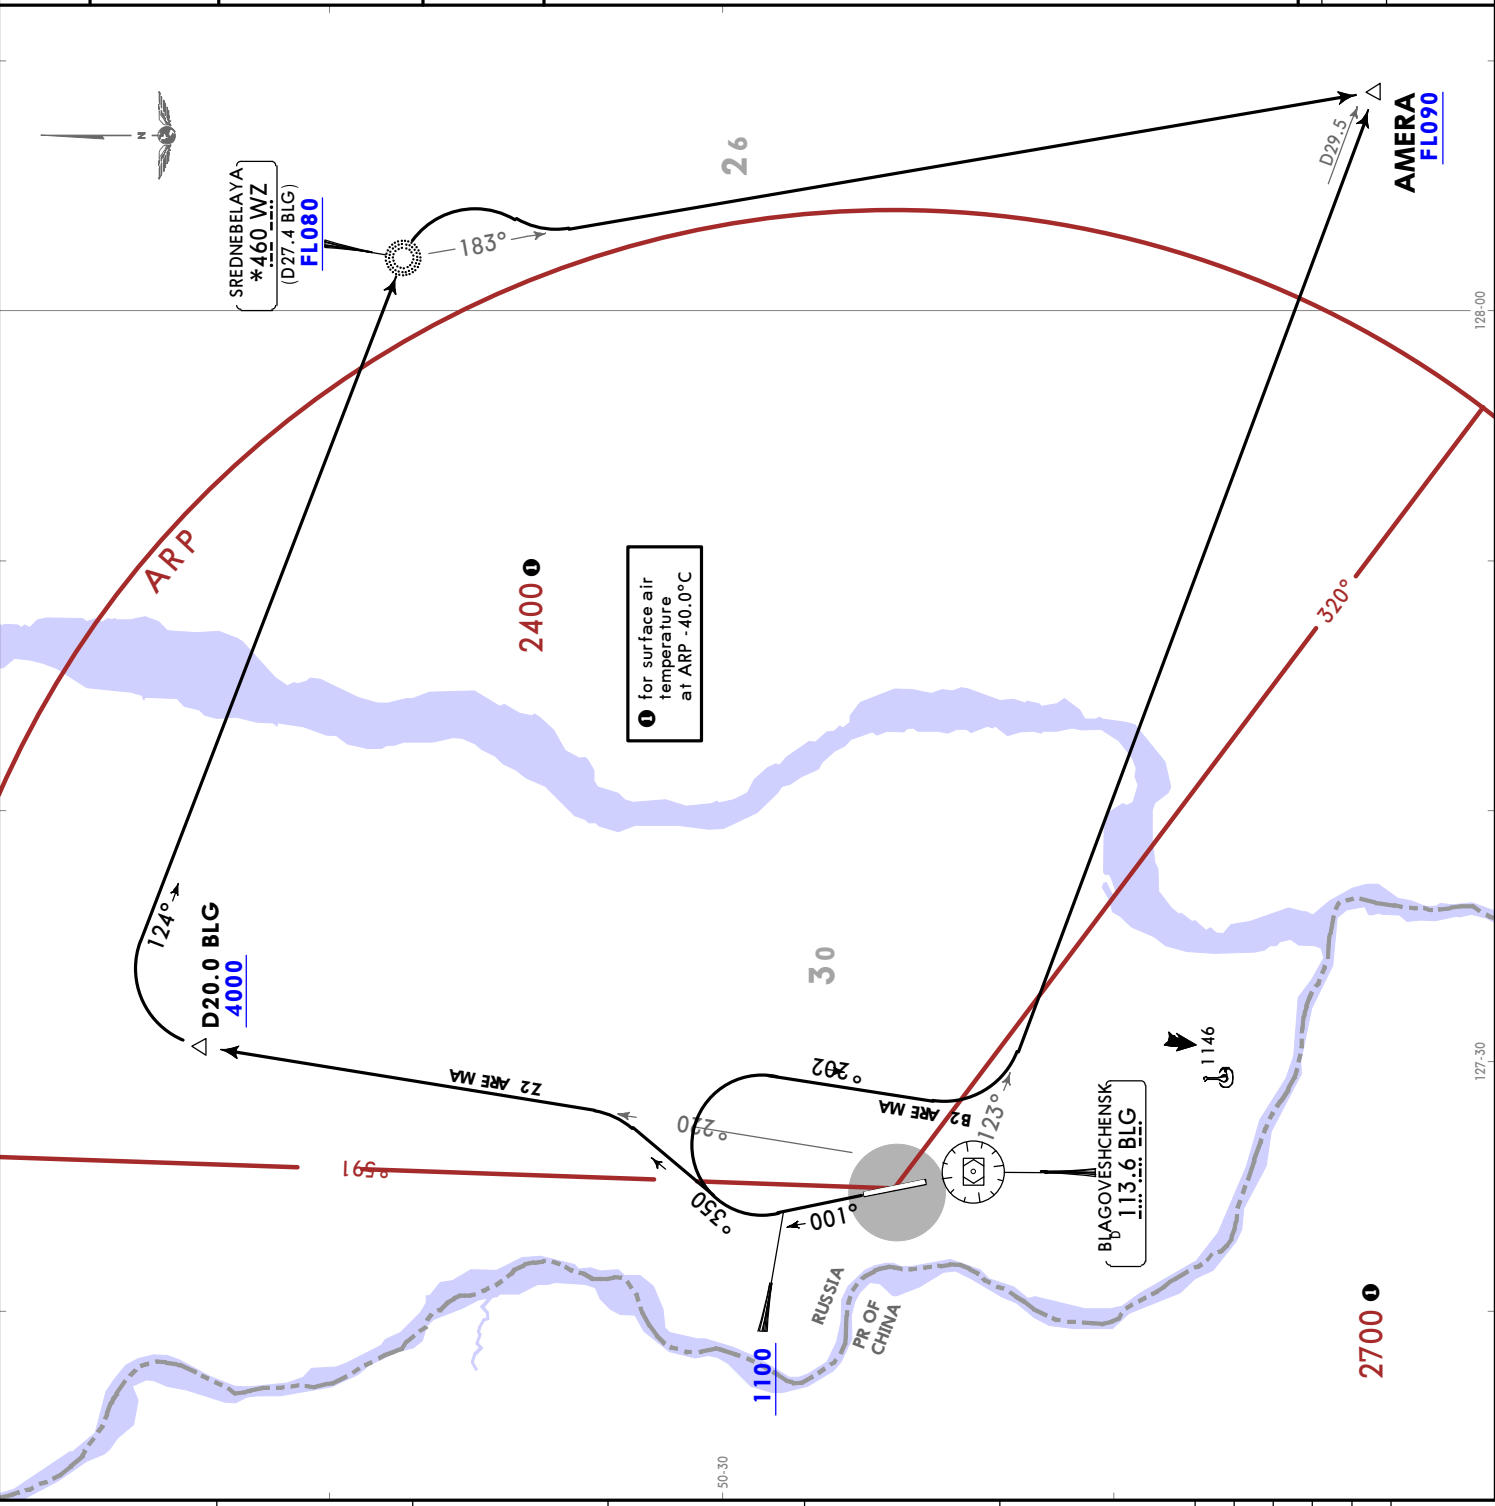

UHBB/BQS
IGNATYEVO

 **JEPPESEN** **BLAGOVESHCHENSK, RUSSIA**
8 DEC 23 **10-4** **NOISE**

NOISE ABATEMENT

LT minus 9 HOURS = UTC(Z)

DEPARTURES

Noise abatement procedures shall be executed during take-off and climb.

Noise abatement procedures shall not be executed at the expense of flight safety or in case of one of ACFT engines failure during take-off.

CAT C & D ACFT are permitted to execute initial turn at 1000' (110m) with wing devices extended.


UHBB/BQS

Apt Elev **648'**
N50 25.6 E127 24.9

JEPPESEN **BLAGOVESHCHENSK, RUSSIA**

4 JUL 25 **10-9** Eff 10 Jul

IGNATYEVO

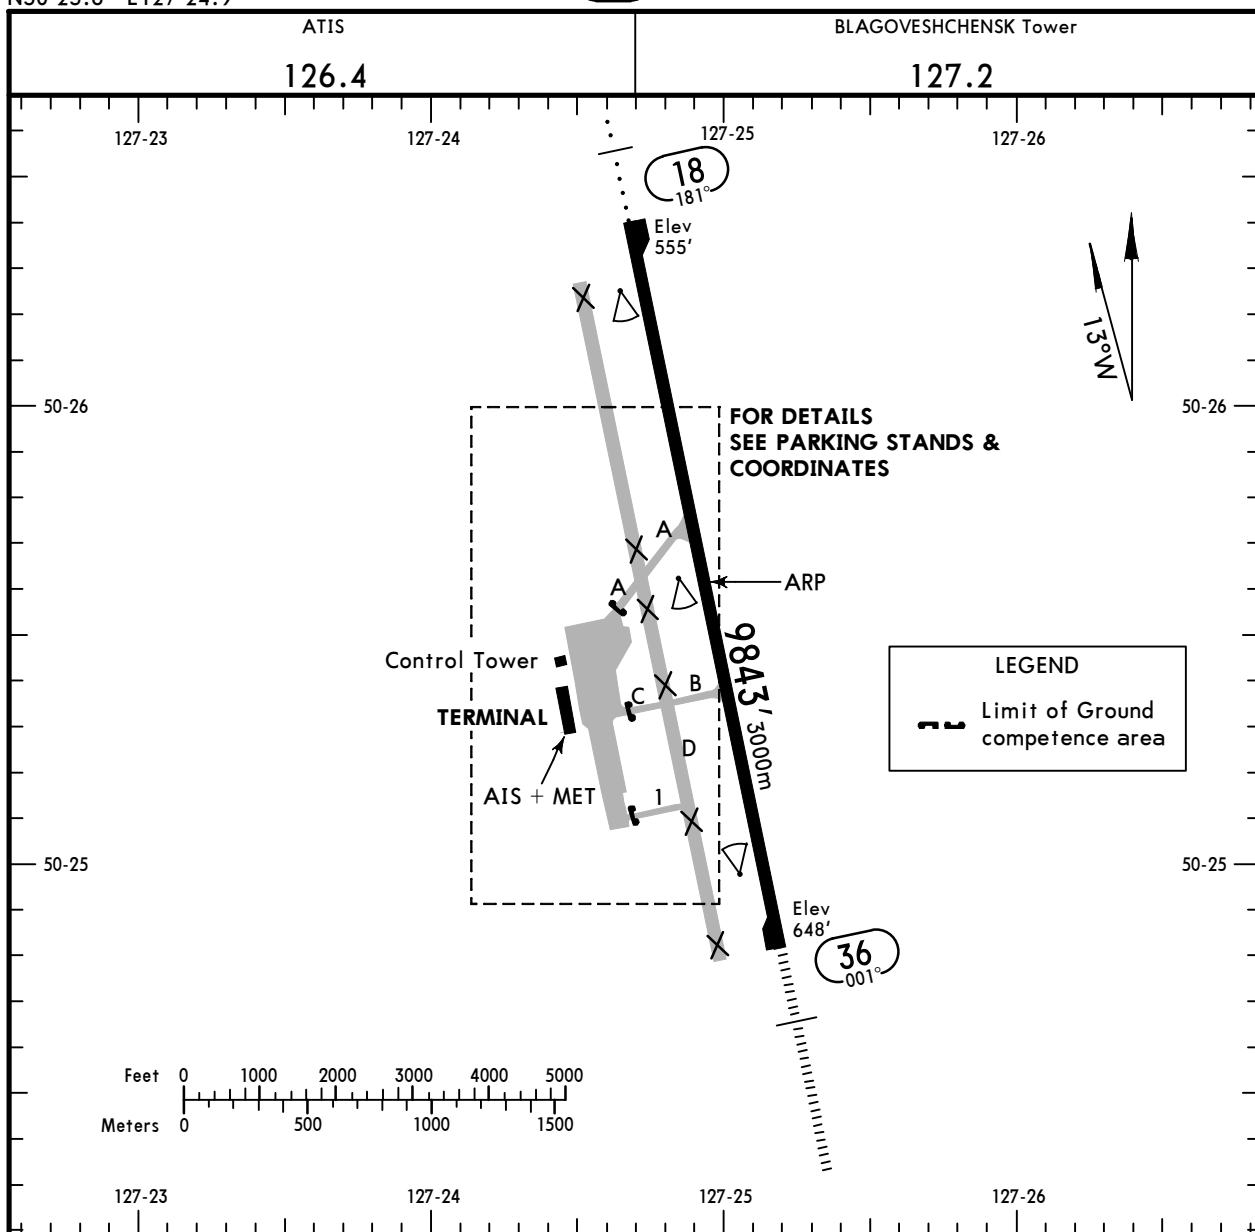

ADDITIONAL RUNWAY INFORMATION

RWY	HIRL (60m)	ALS	PAPI-L (3.00°)	RVR	USABLE LENGTHS		TAKE-OFF	WIDTH
					Threshold	Glide Slope		
18		①				8931' 2722m	③	148' 45m
36		②				8567' 2611m		

① length 420m
② length 900m
③ TAKE-OFF RUN AVAILABLE

RWY 18:		RWY 36:	
From rwy head	9,843'(3000m)	From rwy head	9,843'(3000m)
twy A int	5,381'(1640m)	twy B int	6,234'(1900m)
twy B int	3,281'(1000m)	twy A int	3,806'(1160m)


Std TAKE-OFF			
① RL & RCLM	① RL or RCLM	Adequate Vis Ref	
R/V300m	R/V400m	DAY	NIGHT
		R/V500m	NA

① For NIGHT operations, at least RL and RENL are required.


UHBB/BQS

JEPPESEN **BLAGOVESHCHENSK, RUSSIA**
 4 JUL 25 (10-9A) Eff 10 Jul
 IGNATYEVO

NOT TO SCALE

LEGEND	
5	Parking stand
1	Taxiway
●	Engine start-up/ shutdown point
	Limit of manoeuvring area

INS COORDINATES		
STAND No.	COORDINATES	
1 thru 3	N50 25.4	E127 24.6
4	N50 25.3	E127 24.5
5 thru 7	N50 25.3	E127 24.6
8 thru 10	N50 25.2	E127 24.6
11, 12	N50 25.2	E127 24.7
13, 14	N50 25.1	E127 24.7
15 thru 18	N50 25.1	E127 24.6
19 thru 22	N50 25.2	E127 24.6
23	N50 25.1	E127 24.7
24	N50 25.0	E127 24.7
25	N50 25.1	E127 24.7
26	N50 25.0	E127 24.7
27	N50 25.0	E127 24.6

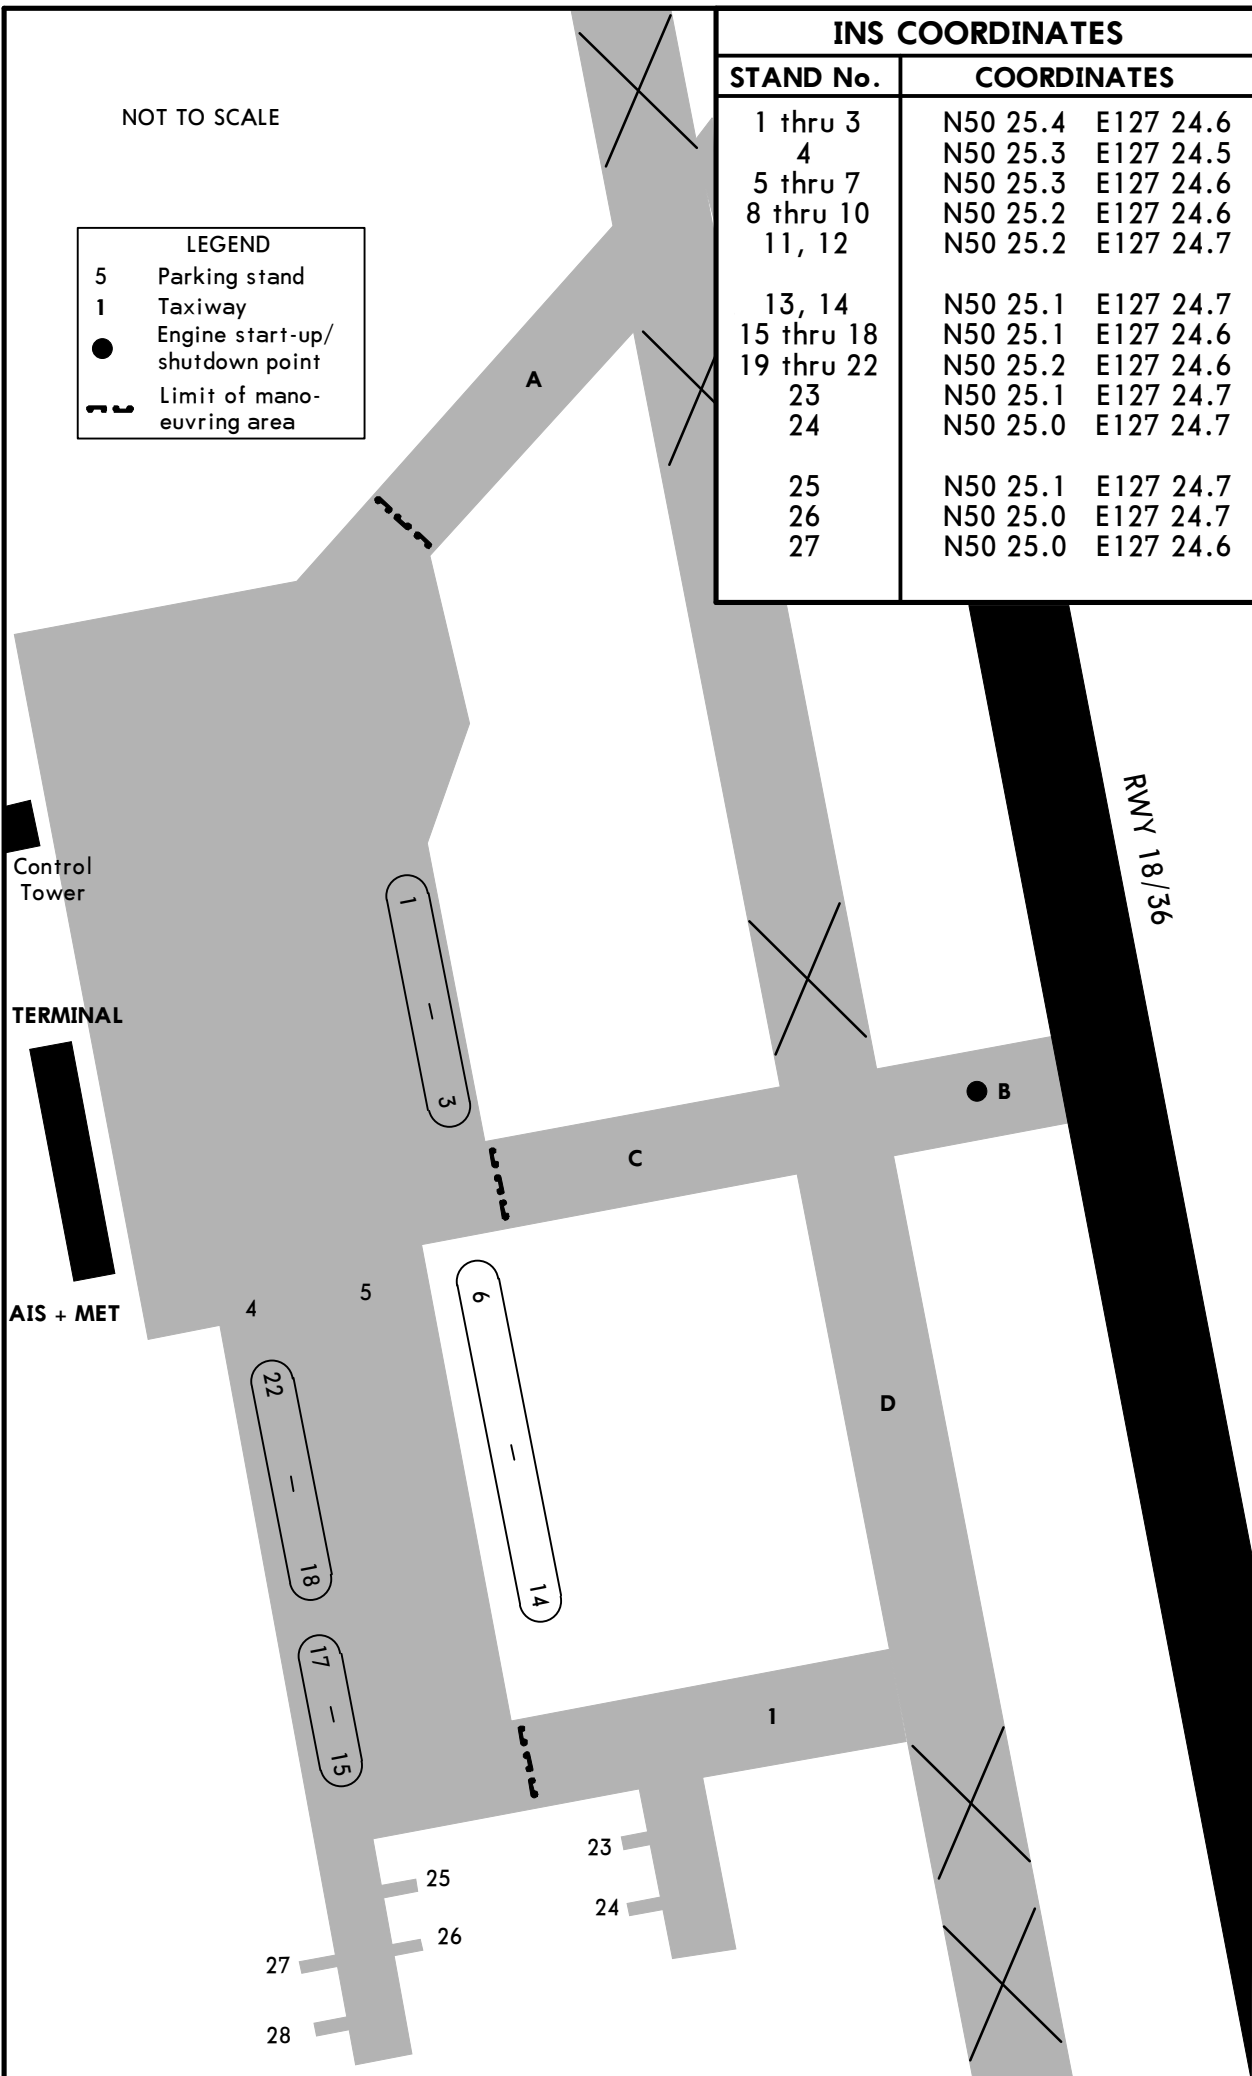

UHBB/BQS



EASA AIR OPS

**BLAGOVESHCHENSK, RUSSIA
IGNATYEVO**

STRAIGHT-IN RWY		A	B	C	D
18	ILS Z or Y	755' (200') R1000m	755' (200') R1000m	755' (200') R1000m	755' (200') R1000m
	ALS out	R1200m	R1200m	R1200m	R1200m
	GLS	755' (200') R1000m	755' (200') R1000m	755' (200') R1000m	755' (200') R1000m
	ALS out	R1200m	R1200m	R1200m	R1200m
	① LOC Z or Y	1000' (445') R1500m	1000' (445') R1500m	1000' (445') R1900m	1000' (445') R1900m
	ALS out	R1500m	R1500m	R2100m	R2100m
	RNP LNAV/VNAV	805' (250') R1000m	805' (250') R1000m	820' (265') R1100m	908' (353') R1400m
	ALS out	R1300m	R1300m	R1300m	R1600m
	① RNP LNAV	930' (375') R1500m	930' (375') R1500m	930' (375') R1500m	930' (375') R1500m
	ALS out	R1500m	R1500m	R1700m	R1700m
	① VOR	1000' (445') R1500m	1000' (445') R1500m	1000' (445') R1900m	1000' (445') R1900m
	ALS out	R1500m	R1500m	R2100m	R2100m
	① NDB	1000' (445') R1500m	1000' (445') R1500m	1000' (445') R1900m	1000' (445') R1900m
	ALS out	R1500m	R1500m	R2100m	R2100m

① Continuous Descent Final Approach.

UHBB/BQS

JEPPESEN
5 JUL 24
Eff 11 Jul (10-9S1)

EASA AIR OPS

BLAGOVESHCHENSK, RUSSIA
IGNATYEVO

STRAIGHT-IN RWY		A	B	C	D
36	ILS Z or Y	848'(200') ① R550m	848'(200') ① R550m	848'(200') ① R550m	848'(200') ① R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	GLS	848'(200') ① R550m	848'(200') ① R550m	848'(200') ① R550m	848'(200') ① R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	②③ LOC Z or Y	1070'(422') R1300m	1070'(422') R1300m	1070'(422') R1300m	1070'(422') R1300m
	ALS out	R1500m	R1500m	R2000m	R2000m
	②④ LOC Z or Y	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m
	RNP LNAV/VNAV	987'(339') R800m	999'(351') R900m	1007'(359') R900m	1018'(370') R1000m
	ALS out	R1500m	R1500m	R1600m	R1700m
	① RNP LNAV	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m
	①⑤ VOR	1110'(462') R1500m	1110'(462') R1500m	1110'(462') R1500m	1110'(462') R1500m
	ALS out	R1500m	R1500m	R2200m	R2200m
	①⑥ VOR	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m
	① NDB	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m	1140'(492') R1500m
	ALS out	R1500m	R1500m	R2300m	R2300m

- ① R750m when a Flight Director or Autopilot or HUDLS to DA is not used.
- ② Continuous Descent Final Approach.
- ③ with D1.9 IBM/D0.6 BLG.
- ④ w/o D1.9 IBM/D0.6 BLG.
- ⑤ with D0.6 BLG.
- ⑥ w/o D0.6 BLG.

⑦ CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
	1190'(542') V1500m	1220'(572') V1600m	1330'(682') V2400m	1350'(702') V3600m

⑦ Prohibited WEST of airport.

TAKE-OFF



Low Visibility Procedures required		RCLM or RL	RL	Adequate Vis Ref	
Approval for Low Visibility Take-off required				DAY	NIGHT
RCLM & RL & RVR		DAY	NIGHT	DAY	NIGHT
DAY	NIGHT			R300m	R/V400m

UHBB/BQS
IGNATYEVO

JEPPESSEN
5 JUL 24 **11-1** **31 Jul**

BLAGOVESHCHENSK, RUSSIA
ILS Z or LOC Z Rwy 18


ATIS 126.4		BLAGOVESHCHENSK Tower 127.2		
LOC ILZ *108.7	Final Apch Crs 181°	D6.0 BLG 1600' (1045')	ILS DA(H) 755' (200')	Apt Elev 648' Rwy 555'
MISSED APCH: Climb STRAIGHT AHEAD to BB305, then turn LEFT (MAX 205 KT) to BB307 climbing to 3000' or above.				
Alt Set: hPa (MM on req)		Rwy Elev: 20 hPa	Trans level: FL050 2	Trans alt: 4000'
RNAV 1 for initial and missed apch. 1. GNSS required. 2. DME required.				
3. ILS DME reads zero at rwy 18 threshold.				
4. Timing not authorized for defining MAP.				

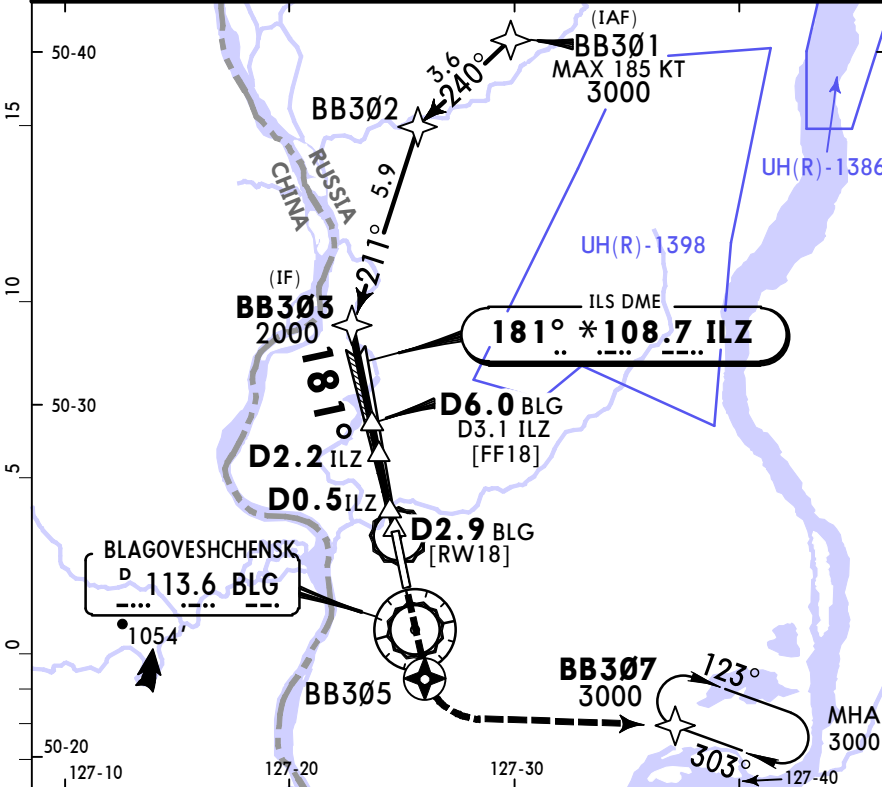

FEET	METERS	FEET	METERS	FEET	METERS
QNH	(QFE)	QNH	(QFE)	QNH	(QFE)
4000	(1050)	1413	(262)	1100	(170)
3000	(750)	1350	(215)	1069	(157)
2700	(650)	1330	(210)	1000	(135)
2400	(550)	1293	(225)	780	(70)
2000	(445)	1220	(175)	755	(61)
1600	(320)	1190	(165)		

- 1** is computed for surface air temperature at apt -40.0°C. In Russia only.
- 2** FL060, if pressure is less than 1013 hPa (760mm). FL070, if pressure is less than 977 hPa (733mm).
- 3** Based on airport elevation

LOC (GS out)	BLG DME	5.4	4.3
	ALTITUDE	1413'	1069'

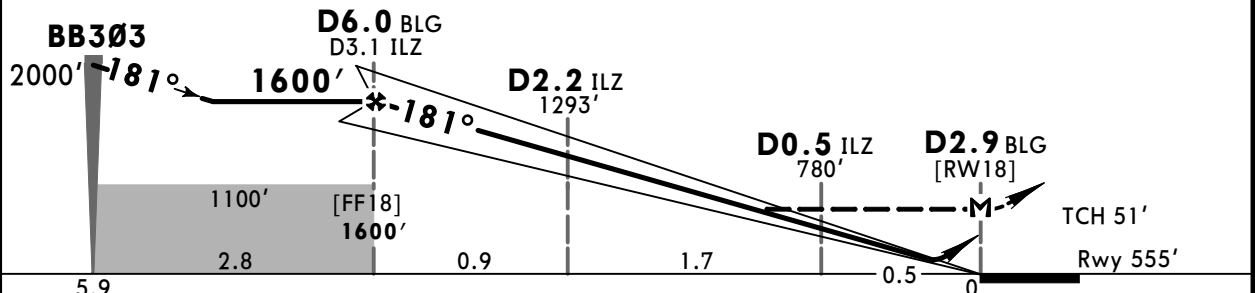

Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI BB305 BB307 MIN 3000'	
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743		849
MAP at D2.9 BLG								

PANS OPS	Std	ILS	STRAIGHT-IN LANDING	LOC (GS out)	CIRCLE-TO-LAND
		DA(H) 755' (200')	CDFA DA/MDA(H) 1000' (445')	PROHIBITED West of airport	
		ALS out	ALS out	Max KT	MDA(H)
	A			R1500m	100
B				135	1220' (572') V1600m
C	R1000m	R1200m		180	1330' (682') V2400m
D			R1900m R2100m	205	1350' (702') V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.


UHBB/BQS
IGNATYEVO

JEPPesen
5 JUL 24 **11-2** Eff 11 Jul


BLAGOVESHCHENSK, RUSSIA
ILS Y or LOC Y Rwy 18

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP ①</p>
LOC ILZ *108.7	Final Apch Crs 181°	D6.0 BLG 1600' (1045')	ILS DA(H) 755' (200')	Apt Elev 648' Rwy 555'	
MISSED APCH: Climb STRAIGHT AHEAD to VOR, then to D1.2 BLG, turn LEFT (MAX 185 KT) to cross R-123 BLG, then to D7.9/R-123 BLG climbing to 3000' or above.					
Alt Set: hPa (MM on req)		Rwy Elev: 20 hPa	Trans level: FL050 ②		Trans alt: 4000'

1. DME required. 2. Radar required.
3. ILS DME reads zero at rwy 18 threshold.
4. Timing not authorized for defining MAP.

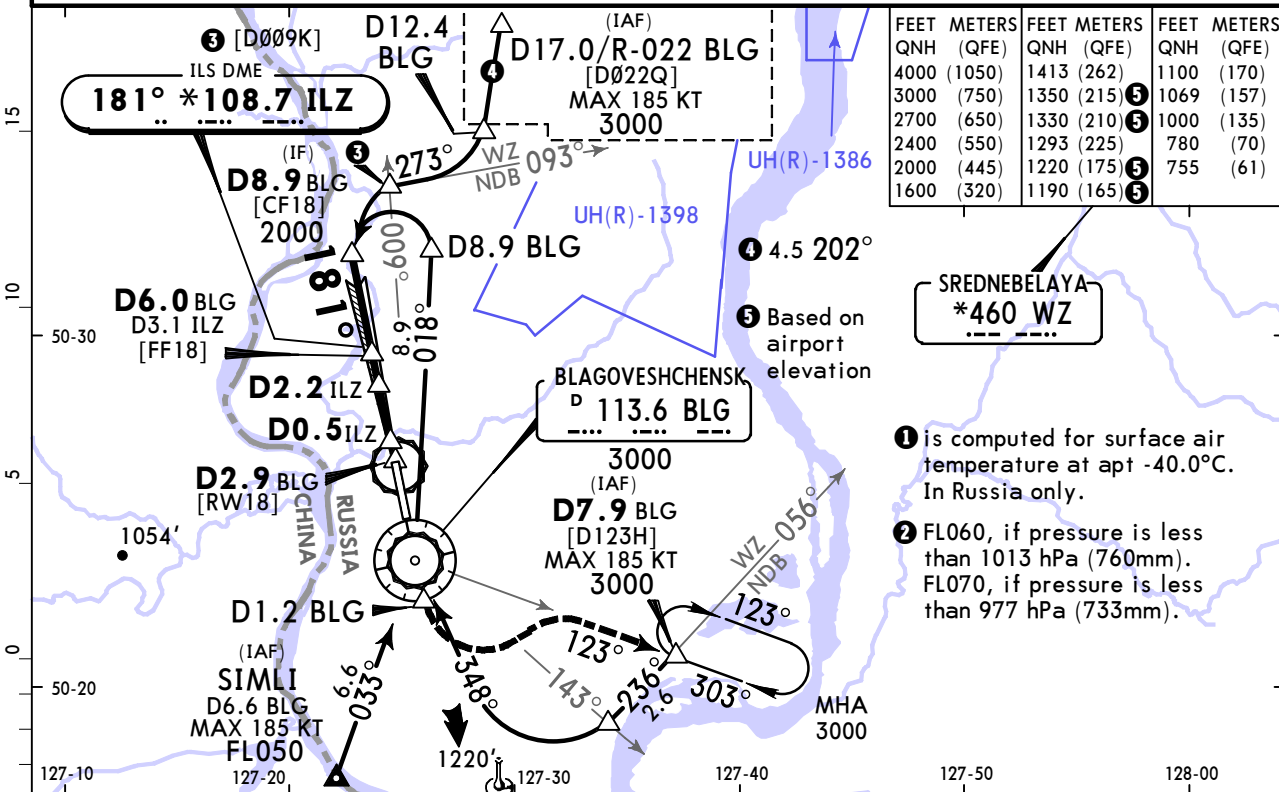

LOC (GS out)	BLG DME	5.4	4.3
	ALTITUDE	1413'	1069'

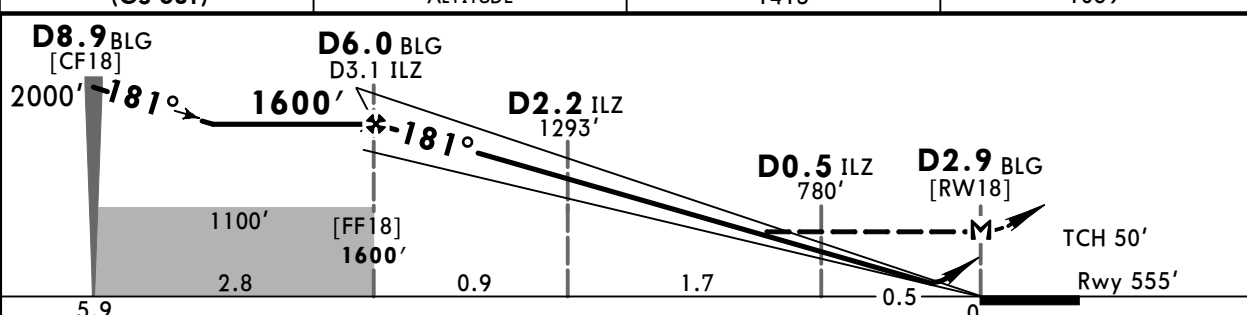

Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI BLG 113.6 D1.2 BLG	
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743		849
MAP at D2.9 BLG								

Std ILS DA(H) 755' (200') ALS out	STRAIGHT-IN LANDING CDFA DA/MDA(H) 1000' (445') ALS out		LOC (GS out) CDFA DA/MDA(H) 1000' (445') ALS out		CIRCLE-TO-LAND PROHIBITED West of airport Max KT MDA(H)	
	A	R1500m		100		1190' (542') V1500m
	B	R1500m		135		1220' (572') V1600m
	C	R1000m	R1200m	180		1330' (682') V2400m
D		R1900m	R2100m	205	1350' (702') V3600m	


■ VNAV DA(H) in lieu of MDA(H) depends on operator policy.

UHBB/BQS
IGNATYEVO

5 JUL 24
Eff 11 Jul (11-3)


JEPPESEN BLAGOVESHCHENSK, RUSSIA
ILS Z or LOC Z Rwy 36

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2		
LOC IBM *111.1	Final Apch Crs 001°	D4.8 IBM 2200' (1552')	ILS DA(H) 848' (200')	Apt Elev 648' Rwy 648'




MISSED APCH: Climb STRAIGHT AHEAD to BB311, then turn RIGHT (MAX 185 KT) to BB307 climbing to 3000' or above.

Alt Set: hPa (MM on req) Rwy Elev: 24 hPa Trans level: FL050 **2** Trans alt: 4000'
RNAV 1 for initial and missed apch.
1. GNSS required. 2. DME required. 3. ILS DME reads zero at rwy 36 threshold.
4. Timing not authorized for defining MAP.

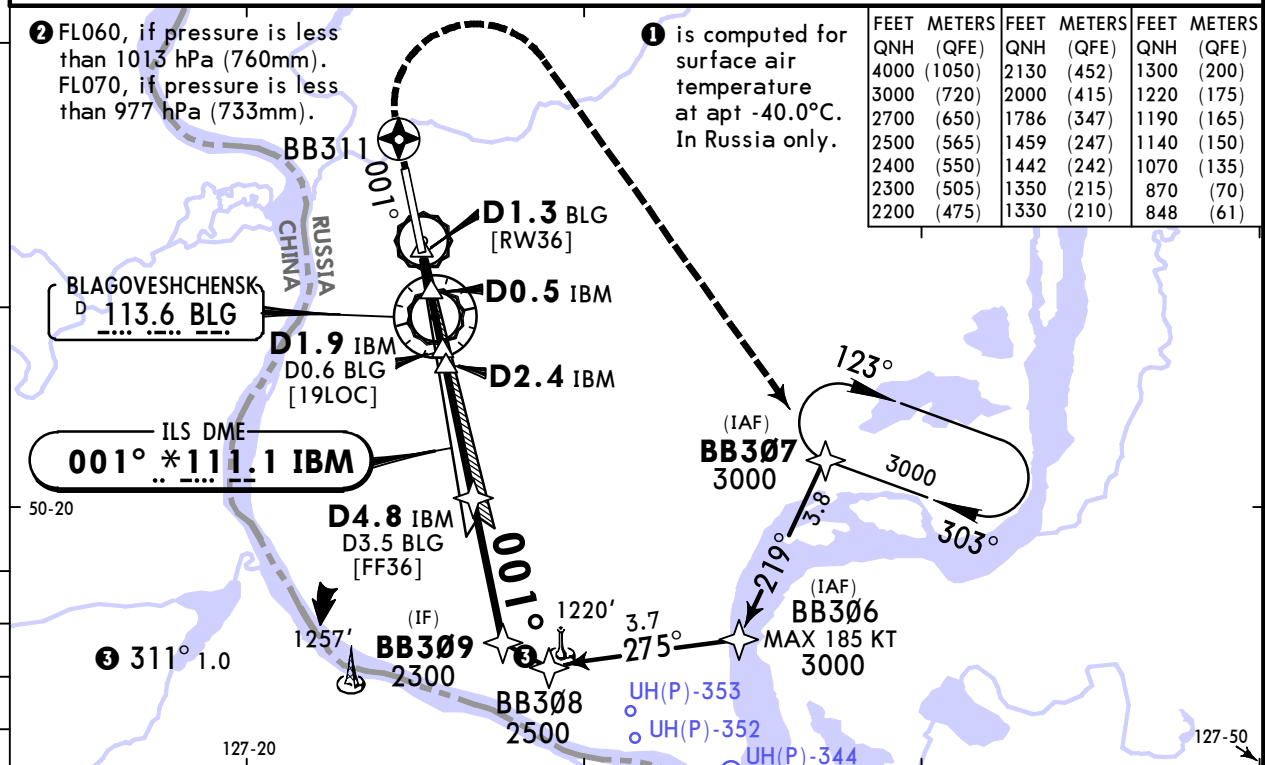

LOC (GS out)	BLG DME ALTITUDE	1.1	2.2	3.2
		1442'	1786'	2130'

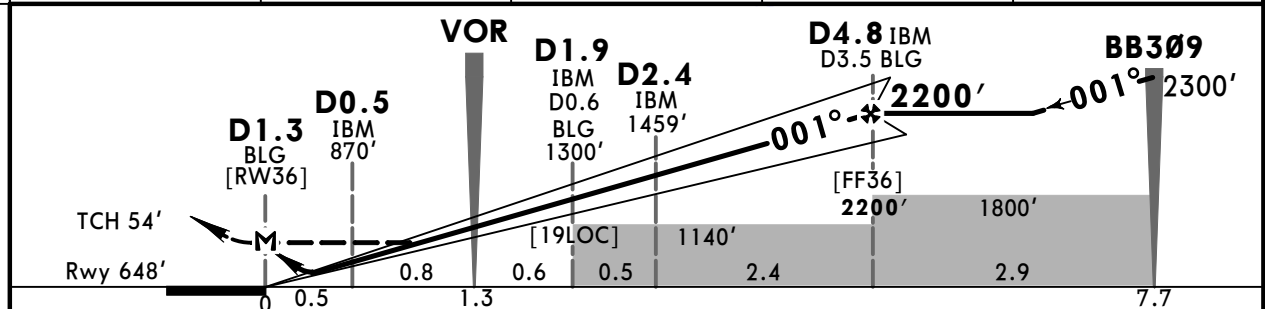

Gnd speed-Kts	70	90	100	120	140	160		HIALS	BB311	BB307	MIN 3000'
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849		↑	RT	↑
MAP at D1.3 BLG											

PANS OPS	ILS		STRAIGHT-IN LANDING LOC (GS out)		CIRCLE-TO-LAND	
	ALS out	ALS out	ALS out	ALS out	Max KT	MDA(H)
A					100	1190' (542') V1500m
B	R550m	R1200m	R1300m	R1500m	135	1220' (572') V1600m
C					180	1330' (682') V2400m
D					205	1350' (702') V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

UHBB/BQS
IGNATYEVO

JEPPESEN
5 JUL 24
Eff 11 Jul **(11-4)**


BLAGOVESHCHENSK, RUSSIA
ILS Y or LOC Y Rwy 36

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP</p>
LOC IBM *111.1	Final Apch Crs 001°	D4.8 IBM 2200' (1552')	ILS DA(H) 848' (200')	Apt Elev 648' Rwy 648'	


MISSED APCH: Climb STRAIGHT AHEAD to D3.5 BLG, then turn RIGHT (MAX 185 KT) onto track 181° to establish on R-123 BLG, then to D7.9/R-123 BLG climbing to 3000' or above.

Alt Set: hPa (MM on req) Rwy Elev: 24 hPa Trans level: FL050 **2** Trans alt: 4000'

1. DME required. 2. Radar required.
3. ILS DME reads zero at rwy 36 threshold.
4. Timing not authorized for defining MAP.

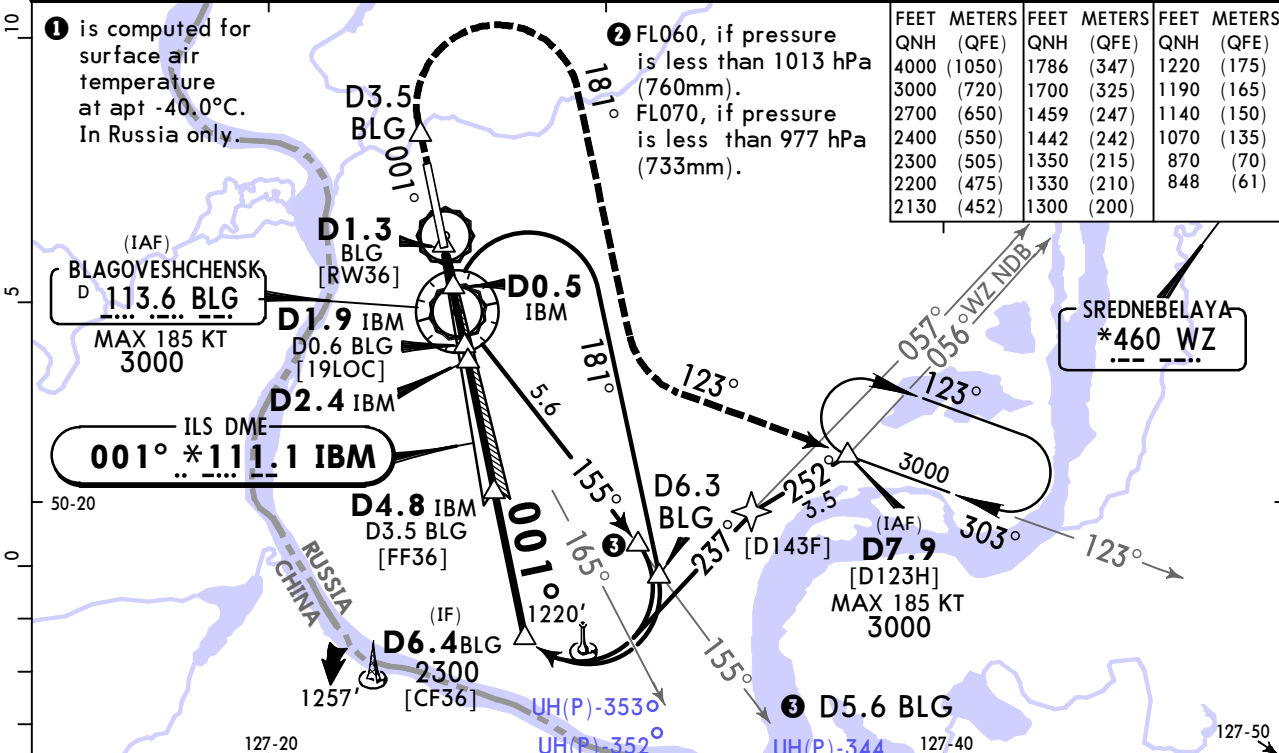

LOC (GS out)	BLG DME ALTITUDE	1.1	2.2	3.2
		1442'	1786'	2130'

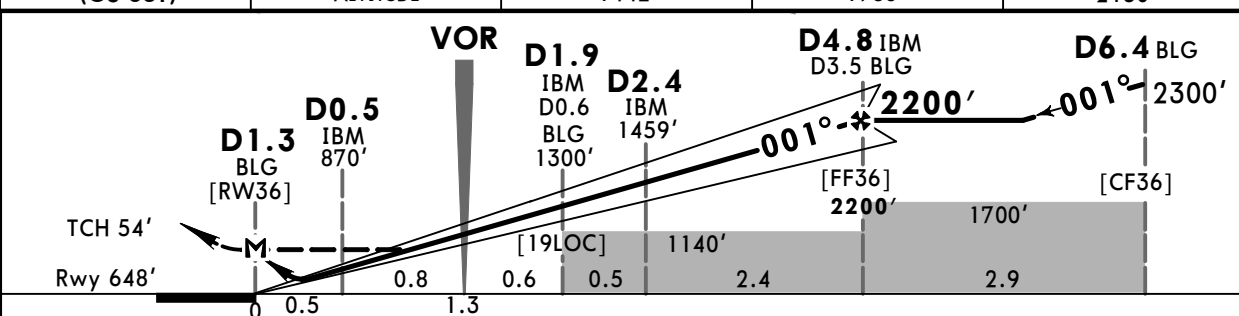

Gnd speed-Kts	70	90	100	120	140	160	HIALS 	D3.5 BLG 	181° 	
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743				849
MAP at D1.3 BLG										


PANS OPS	STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
	ILS	LOC (GS out)	PROHIBITED West of airport	
	DA(H) 848' (200')	with D1.9 IBM/D0.6 BLG CDFA 1070' (422')	w/o D1.9 IBM/D0.6 BLG CDFA 1140' (492')	
	ALS out	ALS out	ALS out	
A		R1500m	R1500m	
B	R550m	R1200m	R1300m	R1500m
C			R2000m	R2300m
D				
			Max KT	MDA(H)
			100	1190' (542') V1500m
			135	1220' (572') V1600m
			180	1330' (682') V2400m
			205	1350' (702') V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.
2 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

**UHBB/BQS
IGNATYEVO**

JEPPESEN BLAGOVESHCHENSK, RUSSIA
5 JUL 24 (12-1) Eff 11 Jul
RNP Rwy 18

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2		
RNAV	Final Apch Crs 181°	BB304 1600' (1045')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 648' Rwy 555'




BRIEFING STRIP™

MISSED APCH: Climb STRAIGHT AHEAD to BB305, then turn LEFT (MAX 205 KT) to BB307 climbing to 3000' or above.


Alt Set: hPa (MM on req) Rwy Elev: 20 hPa Trans level: FL050 ② Trans alt: 4000'

- RNAV apch.
- GNSS required. 2. Baro-VNAV not authorized below -38°C.
 - Timing not authorized for defining MAP.

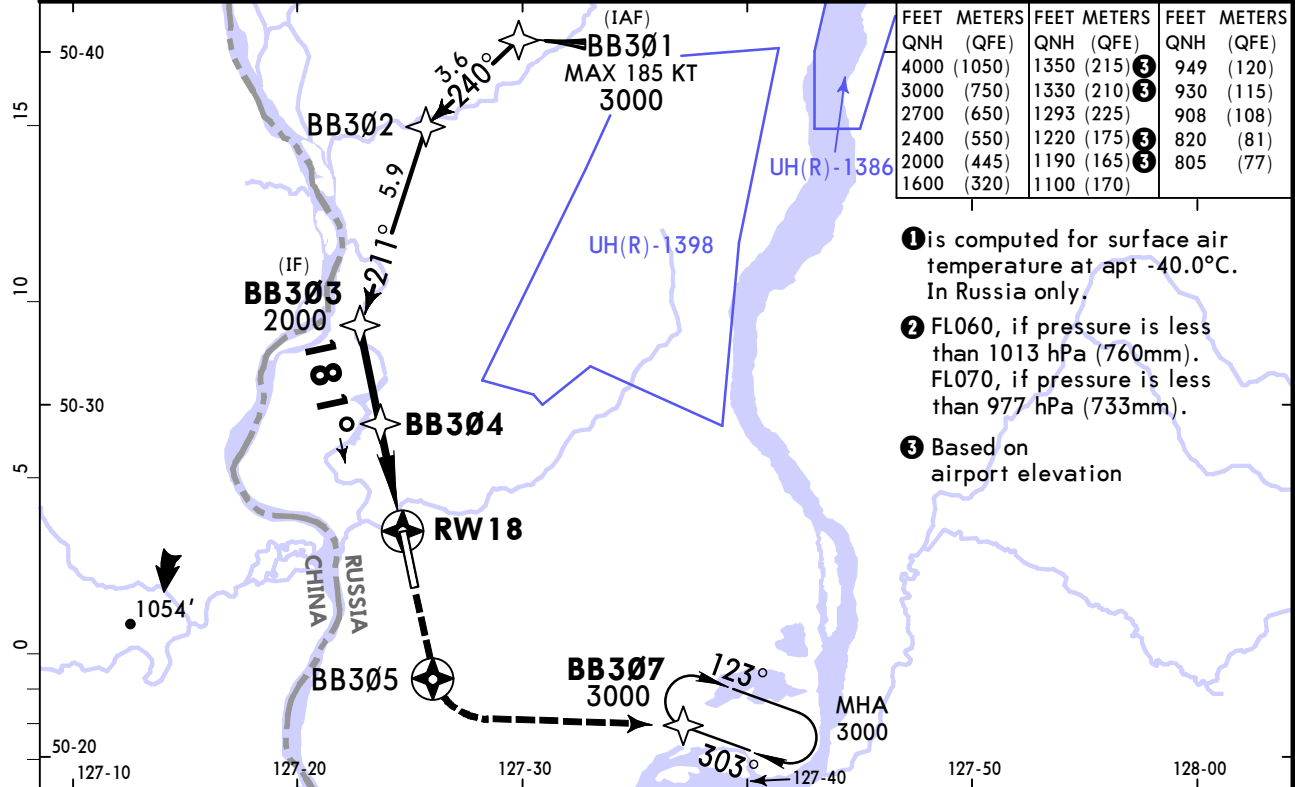

- ① is computed for surface air temperature at apt -40.0°C. In Russia only.
- ② FL060, if pressure is less than 1013 hPa (760mm). FL070, if pressure is less than 977 hPa (733mm).
- ③ Based on airport elevation

DIST to RW18	2.2	1.1
ALTITUDE	1293'	949'

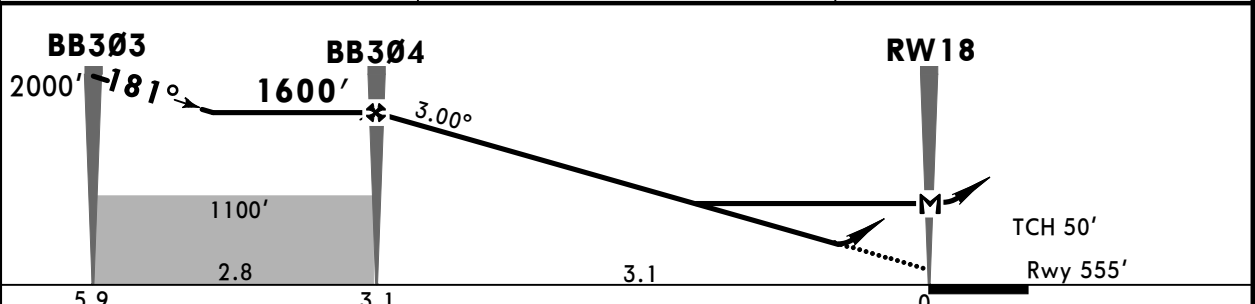

Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI BB305 BB307 MIN 3000'
Glide Path Angle 3.00°	372	478	531	637	743	849	


PANS OPS	STRAIGHT-IN LANDING				CIRCLE-TO-LAND	
	LNAV/VNAV		LNAV CDFA		PROHIBITED West of airport	
	DA(H) AB: 805' (250')	C: 820' (265') D: 908' (353')	DA/MDA(H) 930' (375')		Max KT	MDA(H)
A	R1000m	R1300m	R1500m		100	1190' (542') V1500m
B	R1100m		R1500m	R1700m	135	1220' (572') V1600m
C	R1400m	R1600m			180	1330' (682') V2400m
D				205	1350' (702') V3600m	

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.
CHANGES: Rwy designation, procedure. © JEPPESEN, 2023, 2024. ALL RIGHTS RESERVED.


UHBB/BQS
IGNATYEVO

JEPPESEN **BLAGOVESHCHENSK, RUSSIA**
5 JUL 24 (12-2) **Eff 11 Jul** **RNP Rwy 36**

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP</p>
RNAV	Final Apch Crs 001°	BB310 2200' (1552')	LNAV/VNAV DA(H) Refer to Minimums	Apt Elev 648'	
MISSED APCH: Climb STRAIGHT AHEAD to BB311, then turn RIGHT (MAX 185 KT) to BB307 climbing to 3000' or above.					
Alt Set: hPa (MM on req)		Apt Elev: 24 hPa	Trans level: FL050 ②		Trans alt: 4000'
RNP apch 1. GNSS required. 2. Baro-VNAV not authorized below -31°C. 3. Timing not authorized for defining MAP.					

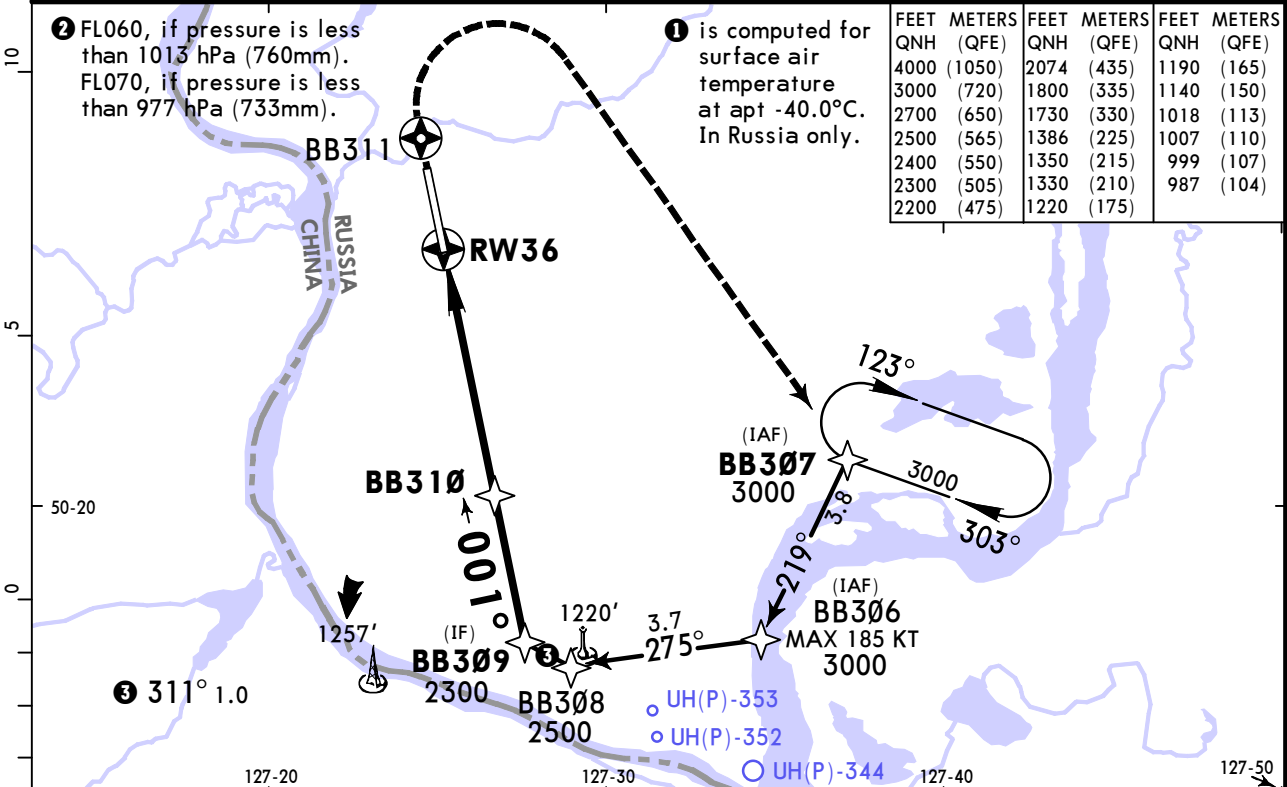

DIST to RW36	2.2	3.2	4.3
ALTITUDE	1386'	1730'	2074'

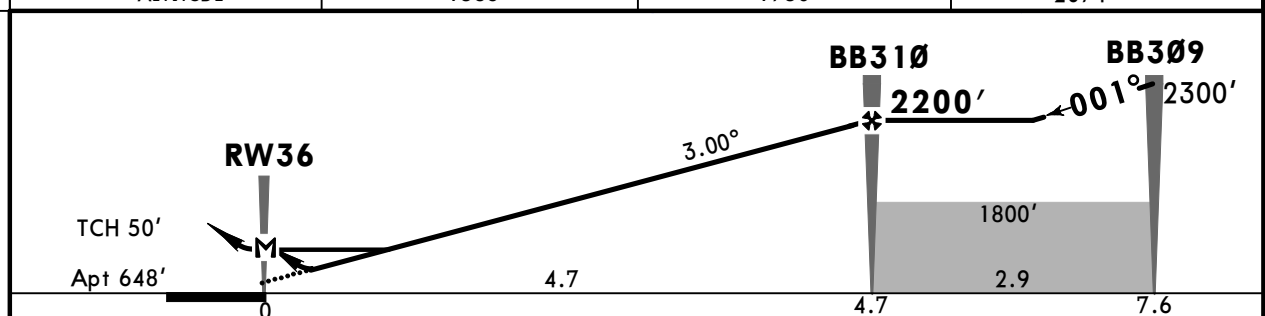

Gnd speed-Kts	70	90	100	120	140	160		BB311 ↑	BB307 ↻ RT	185 KT MAX	MIN 3000' ↑
Glide Path Angle	3.00°	372	478	531	637	849					
MAP at RW36											



Std STRAIGHT-IN LANDING						CIRCLE-TO-LAND					
LNAV/VNAV			LNAV CDFA			PROHIBITED West of airport					
DA(H) A: 987' (339') C: 1007' (359') B: 999' (351') D: 1018' (370')			DA/MDA(H) 1140' (492')								
ALS out			ALS out			Max Kts					
A	R800m	R1500m	R1500m			100	1190' (542')	V1500m			
B	R900m	R1500m	R1500m			135	1220' (572')	V1600m			
C	R900m	R1600m	R2300m			180	1330' (682')	V2400m			
D	R1000m	R1700m	R2300m			205	1350' (702')	V3600m			

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.
CHANGES: Rwy designation, procedure, minimums. © JEPPESEN, 2023, 2024. ALL RIGHTS RESERVED.

UHBB/BQS
IGNATYEVO

JEPPESEN **BLAGOVESHCHENSK, RUSSIA**
5 JUL 24 **12-40** **Eff 11 Jul** **GLS Rwy 18**

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP ①</p>
GBAS Ch 20585 G18A	Final Apch Crs 181°	BB304 1600' (1045')	DA(H) 755' (200')	Apt Elev 648' Rwy 555'	
<p>MISSED APCH: Climb STRAIGHT AHEAD to BB305, then turn LEFT (MAX 205 KT) to BB307 climbing to 3000' or above.</p>					
Alt Set: hPa (MM on req)		Rwy Elev: 20 hPa	Trans level: FL050 ②	Trans alt: 4000'	
RNAV 1 for initial and missed approach.					
GNSS required.					

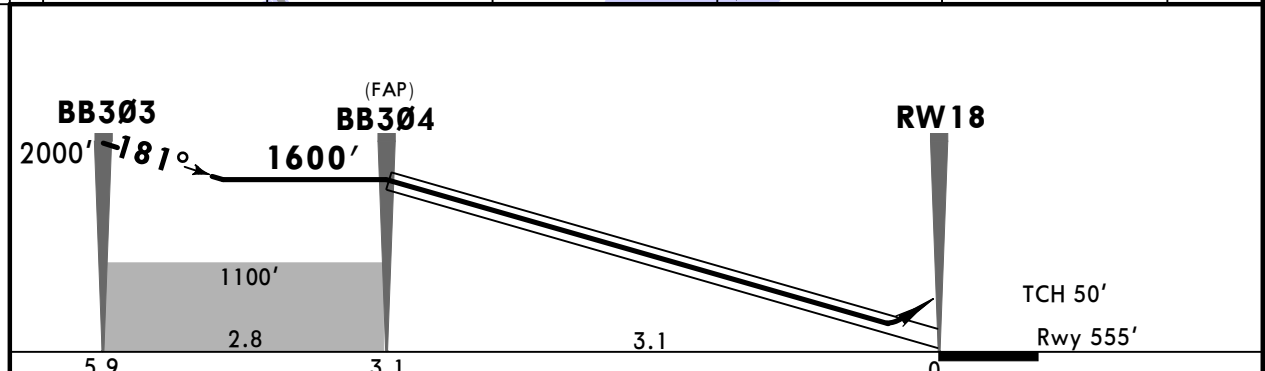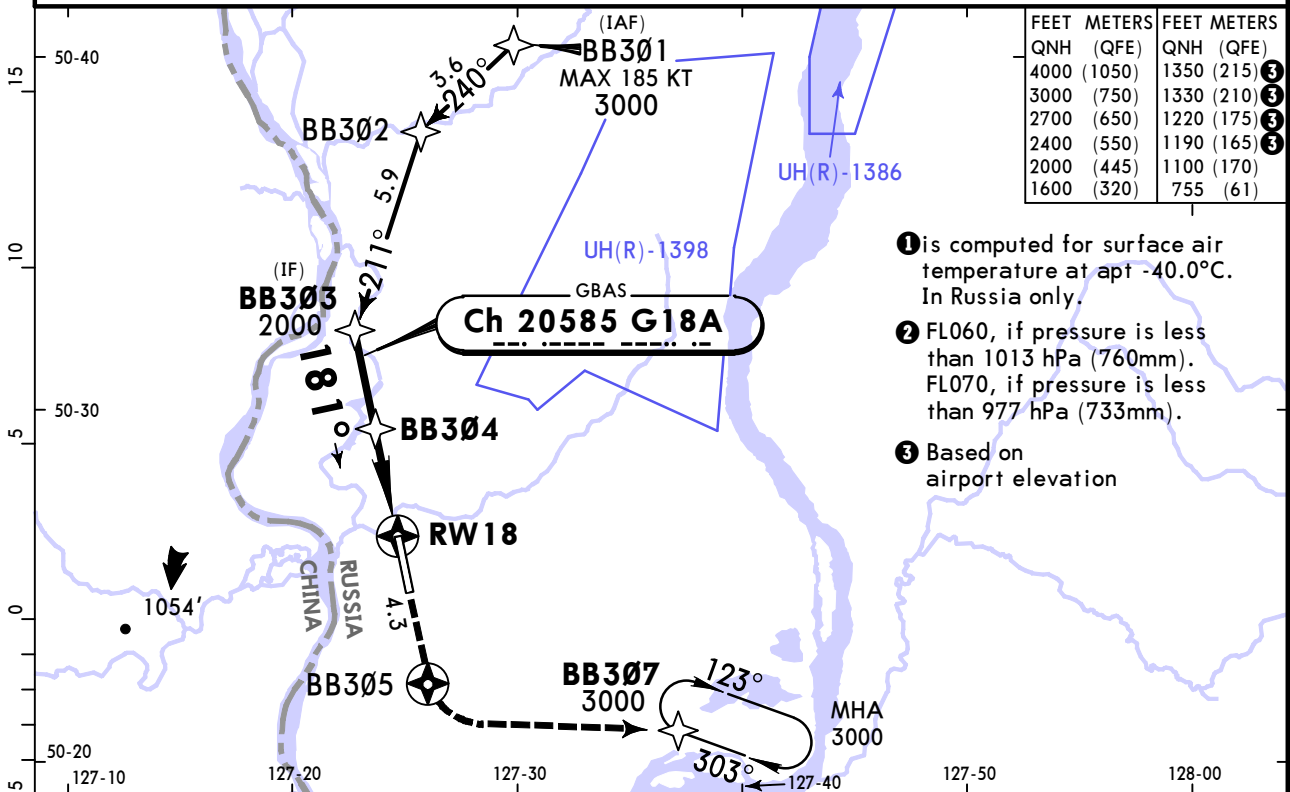



Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI	BB305	BB307	MIN 3000'
Glide Path Angle	3.00°	372	478	531	637	743		849	↑	←

PANS OPS	STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
	GLS DA(H) 755' (200')		PROHIBITED West of airport	
	ALS out		Max KT	MDA(H)
A			100	1190' (542') V1500m
B			135	1220' (572') V1600m
C	R1000m	R1200m	180	1330' (682') V2400m
D			205	1350' (702') V3600m

UHBB/BQS
IGNATYEVO

JEPPESEN **BLAGOVESHCHENSK, RUSSIA**
5 JUL 24 **(12-41)** **Eff 11 Jul** **GLS Rwy 36**

BRIEFING STRIP™	ATIS 126.4	BLAGOVESHCHENSK Tower 127.2			
	GBAS Ch 20996 G36A	Final Apch Crs 001°	BB310 2200' (1552')	DA(H) 848' (200')	
MISSED APCH: Climb STRAIGHT AHEAD to BB311, then turn RIGHT (MAX 185 KT) to BB307 climbing to 3000' or above.					
Alt Set: hPa (MM on req)		Rwy Elev: 24 hPa	Trans level: FL050 ②		Trans alt: 4000'
RNAV 1 for initial and missed approach.					
GNSS required.					

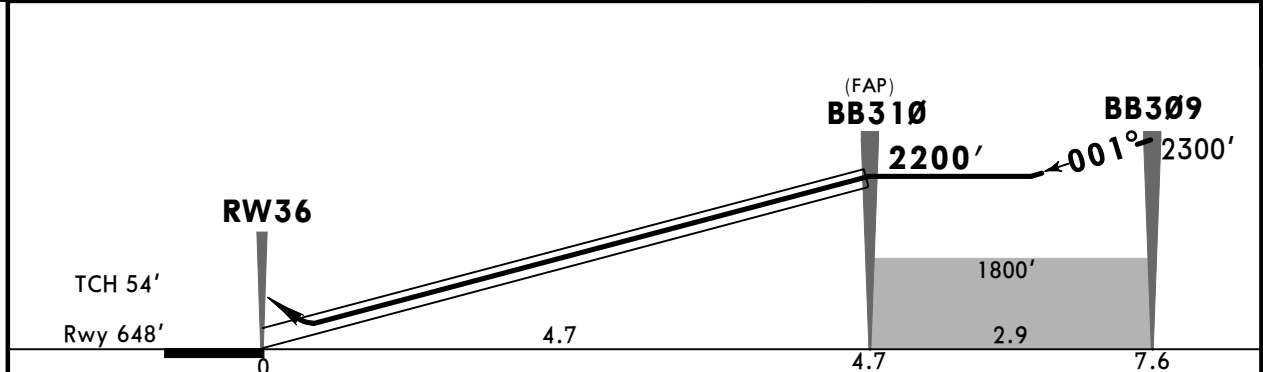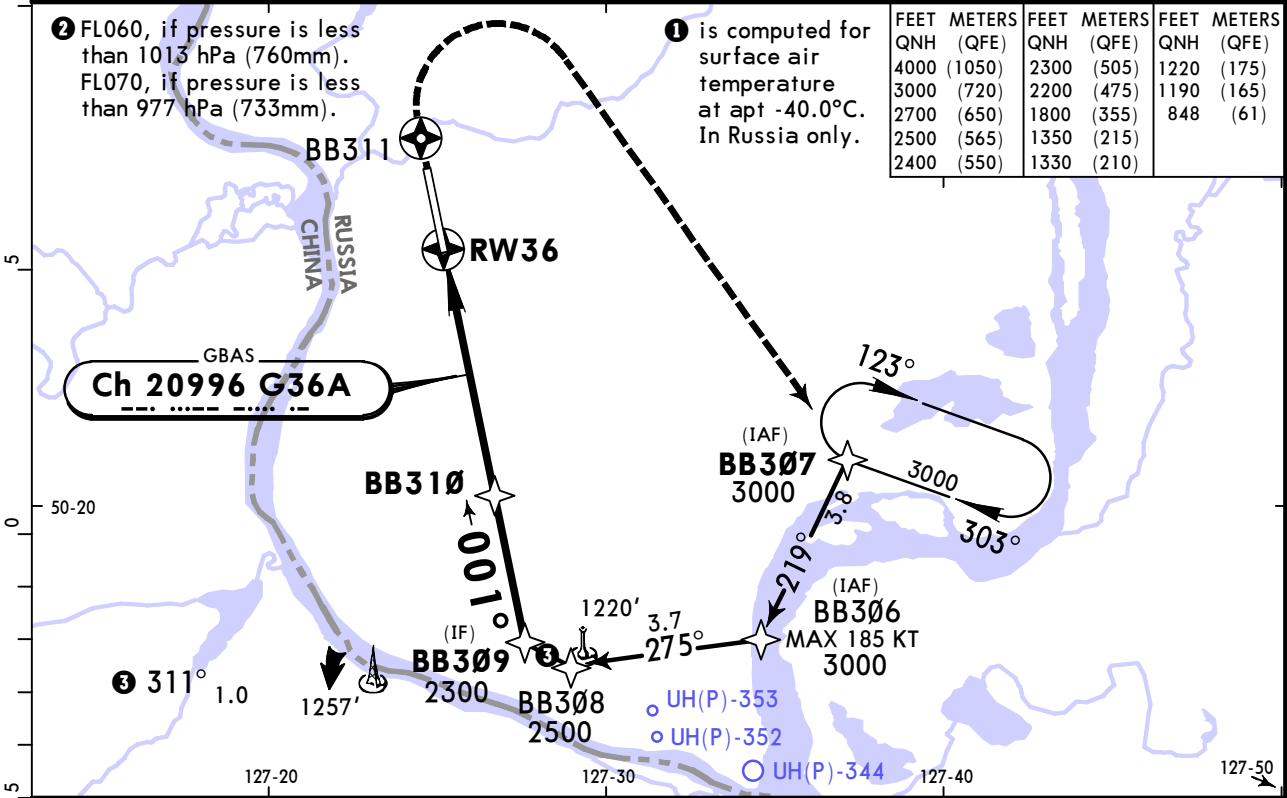

Gnd speed-Kts	70	90	100	120	140	160	HIALS 	BB311 ↑	BB307 RT	185 KT MAX	MIN 3000' ↑
Glide Path Angle	3.00°	372	478	531	637	743		849			

PANS OPS	Std	STRAIGHT-IN LANDING GLS DA(H) 848' (200')	CIRCLE-TO-LAND PROHIBITED West of airport	
		ALS out	Max KT MDA(H)	
	A		100	1190' (542') V1500m
	B		135	1220' (572') V1600m
C	① R550m	R1200m	180	1330' (682') V2400m
D			205	1350' (702') V3600m


① R750m when a Flight Director or Autopilot or HUD to DA is not used.
CHANGES: New procedure. © JEPPESEN, 2024. ALL RIGHTS RESERVED.

UHBB/BQS
IGNATYEVO

JEPPesen
5 JUL 24 **13-1** Eff 11 Jul


BLAGOVESHCHENSK, RUSSIA
VOR Rwy 18

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP ①</p>
VOR BLG 113.6	Final Apch Crs 181°	D6.0 BLG 1600' (1045')	DA/MDA(H) 1000' (445')	Apt Elev 648' Rwy 555'	
MISSED APCH: Climb on R-001 to VOR, then on R-181 to D1.2, turn LEFT (MAX 185 KT) to cross R-123, then to D7.9/R-123 climbing to 3000' or above.					
Alt Set: hPa (MM on req)		Rwy Elev: 20 hPa	Trans level: FL050 ②		Trans alt: 4000'
1. DME required. 2. Radar required. 3. Timing not authorized for defining MAP.					

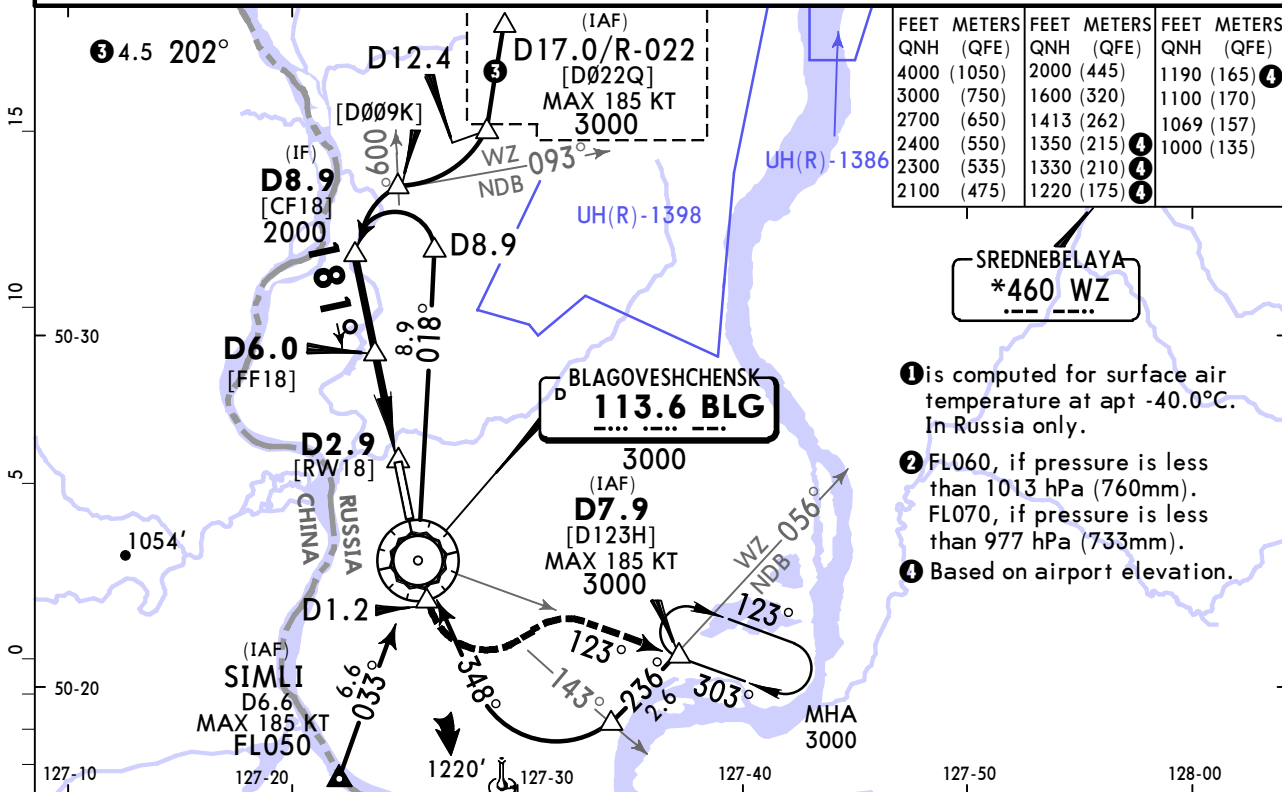

- ① is computed for surface air temperature at apt -40.0°C. In Russia only.
- ② FL060, if pressure is less than 1013 hPa (760mm). FL070, if pressure is less than 977 hPa (733mm).
- ④ Based on airport elevation.

BLG DME	5.4	4.3
ALTITUDE	1413'	1069'

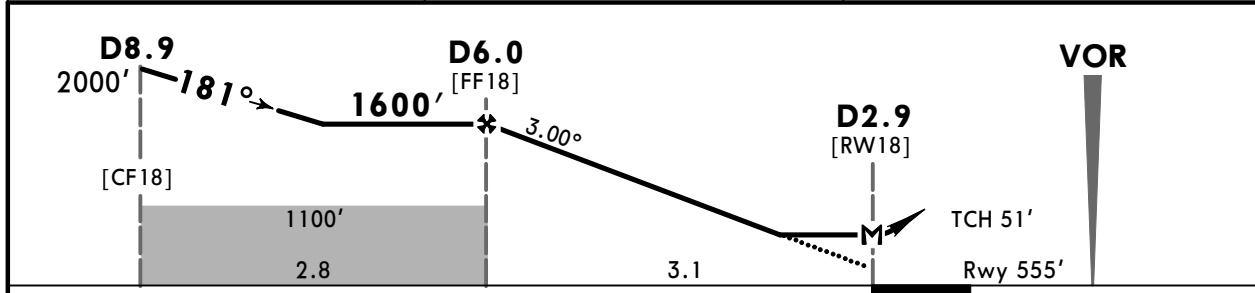

Gnd speed-Kts	70	90	100	120	140	160	ALS PAPI	BLG 113.6 ↑ BLG 113.6 R-001	
Descent Angle	3.00°	372	478	531	637	743			849
MAP at D2.9									

PANS OPS	Std STRAIGHT-IN LANDING		CIRCLE-TO-LAND	
	CDFA		PROHIBITED	
	DA/MDA(H) 1000' (445')		West of airport	
	ALS out		Max	MDA(H)
	A	R1500m	100	1190' (542') V1500m
B	R1500m	135	1220' (572') V1600m	
C	R1900m	180	1330' (682') V2400m	
D	R2100m	205	1350' (702') V3600m	

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.
 CHANGES: Rwy designation, procedure. © JEPPesen, 2023, 2024. ALL RIGHTS RESERVED.

**UHBB/BQS
IGNATYEVO**

**JEPPESEN BLAGOVESHCHENSK, RUSSIA
5 JUL 24 (13-2) Eff 11 Jul
VOR Rwy 36**

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			
VOR BLG 113.6	Final ApcH Crs 001°	D3.5 2200' (1552')	DA/MDA(H) (CONDITIONAL) 1110' (462')	Apt Elev 648'	
MISSED APCH: Climb on R-001 to D3.5 VOR, then turn RIGHT (MAX 185 KT) onto track 181° to establish on R-123, then to D7.9/R-123 climbing to 3000' or above.					


Alt Set: hPa (MM on req) Apt Elev: 24 hPa Trans level: FL050 ② Trans alt: 4000'

1. DME required.
2. Radar required.
3. Timing not authorized for defining MAP.


① is computed for surface air temperature at apt -40.0°C. In Russia only.

② FL060, if pressure is less than 1013 hPa (760mm).
FL070, if pressure is less than 977 hPa (733mm).

FEET	METERS	FEET	METERS	FEET	METERS
QNH	(QFE)	QNH	(QFE)	QNH	(QFE)
4000	(1050)	2126	(450)	1300	(200)
3000	(720)	1782	(346)	1220	(175)
2700	(650)	1700	(325)	1190	(165)
2400	(550)	1438	(241)	1140	(150)
2300	(505)	1350	(215)	1110	(145)
2200	(475)	1330	(210)		

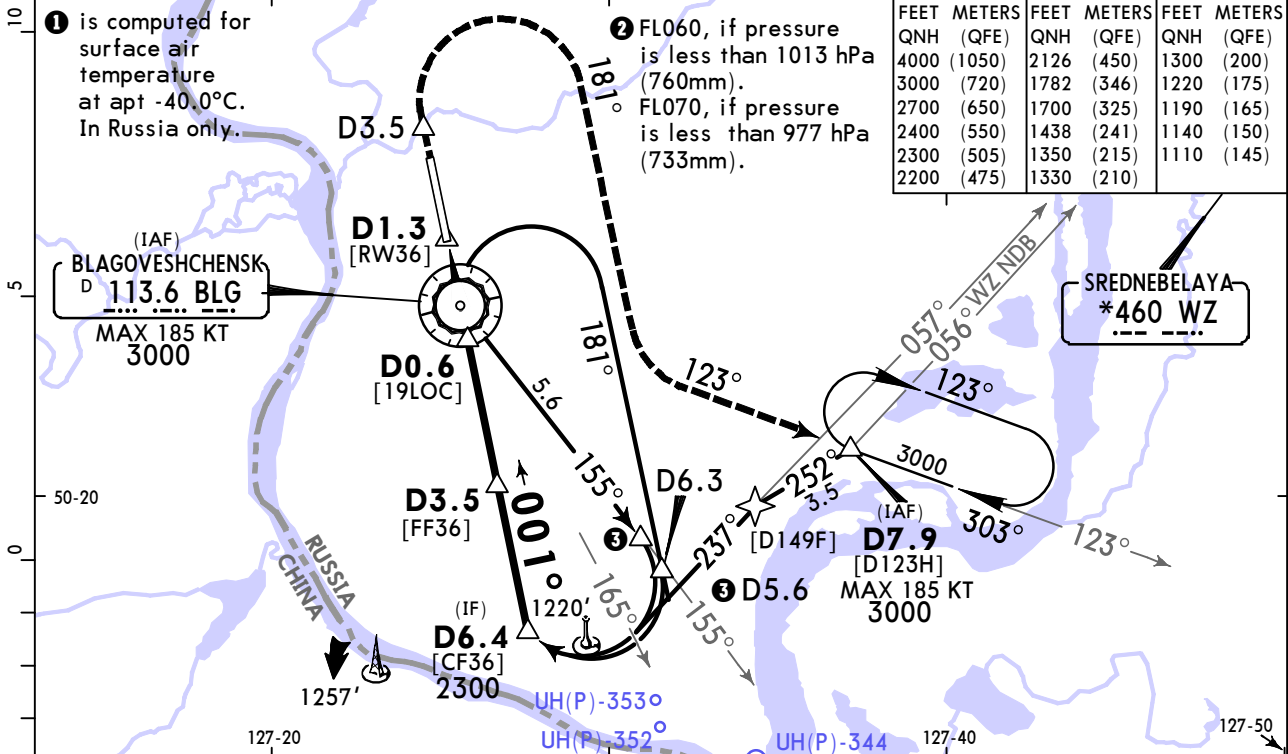

BLG DME	1.1	2.2	3.2
ALTITUDE	1438'	1782'	2126'

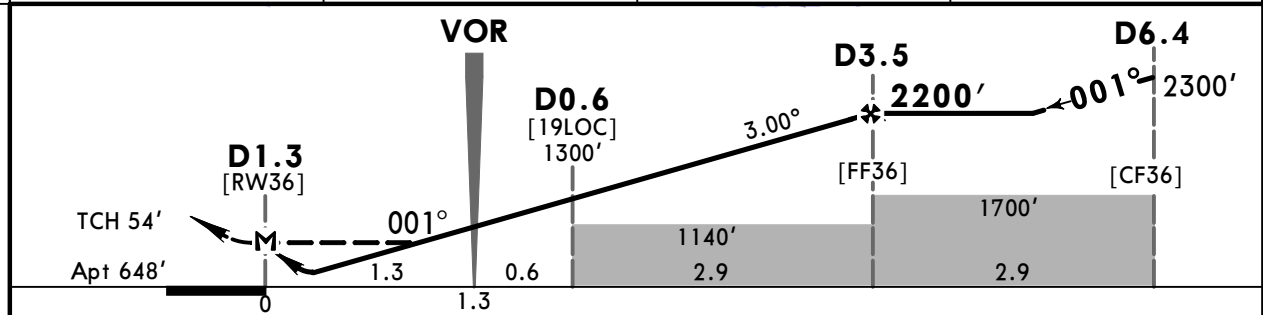

Gnd speed-Kts	70	90	100	120	140	160		D3.5 BLG	R-001 on BLG 113.6	181° RT
Descent Angle	3.00°	372	478	531	637	743				

PANS OPS	Std STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
	with D0.6		w/o D0.6		PROHIBITED West of airport		
	CDFA		CDFA				
	DA/MDA(H) 1110' (462')		DA/MDA(H) 1140' (492')				
	ALS out		ALS out		Max	MDA(H)	
A	R1500m	R1500m		R1500m		100	1190' (542') V1500m
B		R1500m		R1500m		135	1220' (572') V1600m
C		R2200m		R2300m		180	1330' (682') V2400m
D		R2200m		R2300m		205	1350' (702') V3600m


① VNAV DA(H) in lieu of MDA(H) depends on operator policy.
CHANGES: Rwy designation, procedure. © JEPPESEN, 2023, 2024. ALL RIGHTS RESERVED.

UHBB/BQS
IGNATYEVO


JEPPesen
5 JUL 24 **16-1** Eff 11 Jul

BLAGOVESHCHENSK, RUSSIA
NDB Rwy 18

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2		
NDB LZ 350	Final Apch Crs 181°	D6.0 1600' (1045')	DA/MDA(H) 1000' (445')	Apt Elev 648' Rwy 555'
MISSED APCH: Climb STRAIGHT AHEAD to LZ NDB, then turn LEFT (MAX 185 KT) to establish on 121° from LZ NDB, then to 236° from WZ NDB/ 9.0NM from ARP climbing to 3000' or above, then as instructed.				
Alt Set: hPa (MM on req)		Rwy Elev: 20 hPa	Trans level: FL050 ②	Trans alt: 4000'



1. DME required.
2. Radar required.
3. Timing not authorized for defining MAP.

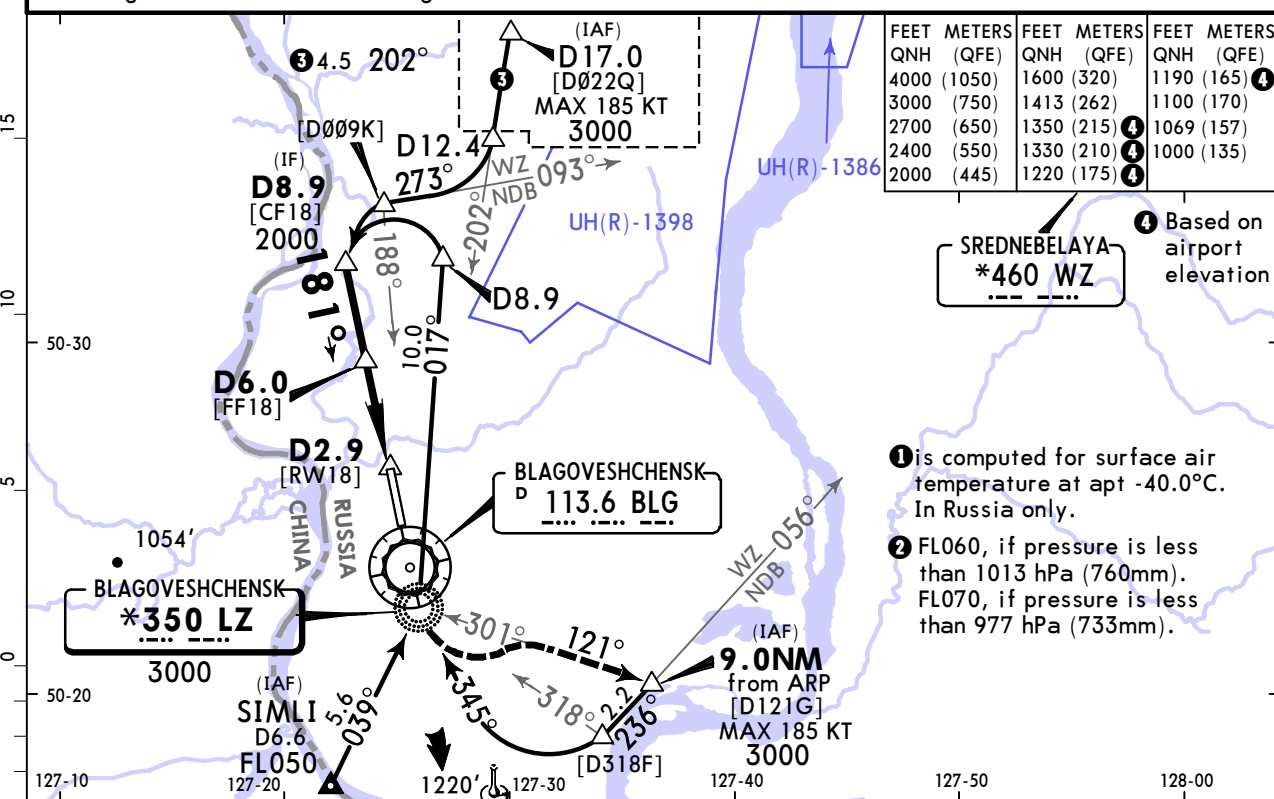

FEET	METERS	FEET	METERS	FEET	METERS
QNH (QFE)	QNH (QFE)	QNH (QFE)	QNH (QFE)	QNH (QFE)	QNH (QFE)
4000 (1050)	1600 (320)	1190 (165)			
3000 (750)	1413 (262)	1100 (170)			
2700 (650)	1350 (215)	1069 (157)			
2400 (550)	1330 (210)	1000 (135)			
2000 (445)	1220 (175)				


④ Based on airport elevation

SREDNEBELAYA *460 WZ


① is computed for surface air temperature at apt -40.0°C. In Russia only.

② FL060, if pressure is less than 1013 hPa (760mm). FL070, if pressure is less than 977 hPa (733mm).

BLG DME	5.4	4.3
ALTITUDE	1413'	1069'

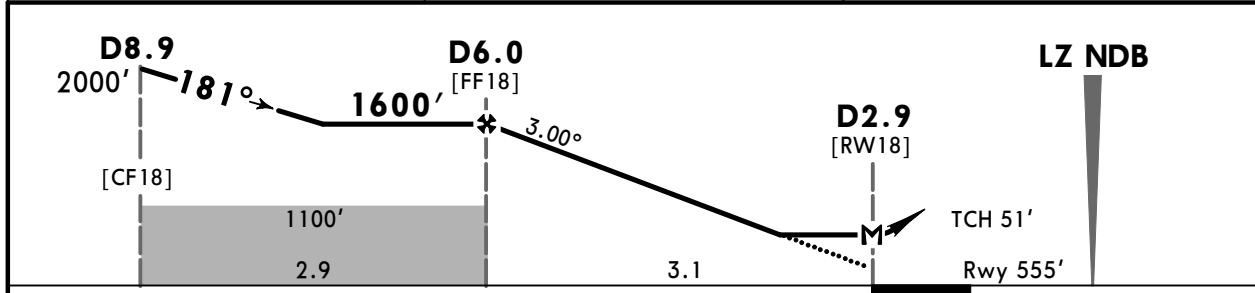

Gnd speed-Kts	70	90	100	120	140	160	
Descent Angle	3.00°	372	478	531	637	743	849




PANS OPS	Std STRAIGHT-IN LANDING		CIRCLE-TO-LAND PROHIBITED West of airport	
	CDFA		Max KT	
	① DA/MDA(H) 1000' (445')		MDA(H)	
	ALS out			
	A	R1500m		100
B	R1500m		135	1220' (572') V1600m
C	R1900m		180	1330' (682') V2400m
D	R2100m		205	1350' (702') V3600m

① VNAV DA(H) in lieu of MDA(H) depends on operator policy.


UHBB/BQS
IGNATYEVO

JEPPESEN BLAGOVESHCHENSK, RUSSIA
5 JUL 24 **(16-2)** **Eff 11 Jul**
NDB Rwy 36

ATIS 126.4		BLAGOVESHCHENSK Tower 127.2			<p>MSA ARP</p>
NDB LZ *350	Final Apch Crs 001°	D3.5 2200' (1552')	DA/MDA(H) 1140' (492')	Apt Elev 648'	
MISSED APCH: Climb STRAIGHT AHEAD to D3.5, then turn RIGHT (MAX 185 KT) onto track 181° to establish on 121° from LZ NDB, then to 9.0NM from ARP climbing to 3000' or above, then by ATC.					
Alt Set: hPa (MM on req)		Apt Elev: 24 hPa	Trans level: FL050 ②	Trans alt: 4000'	
1. DME required. 2. Radar required. 3. Timing not authorized for defining MAP.					

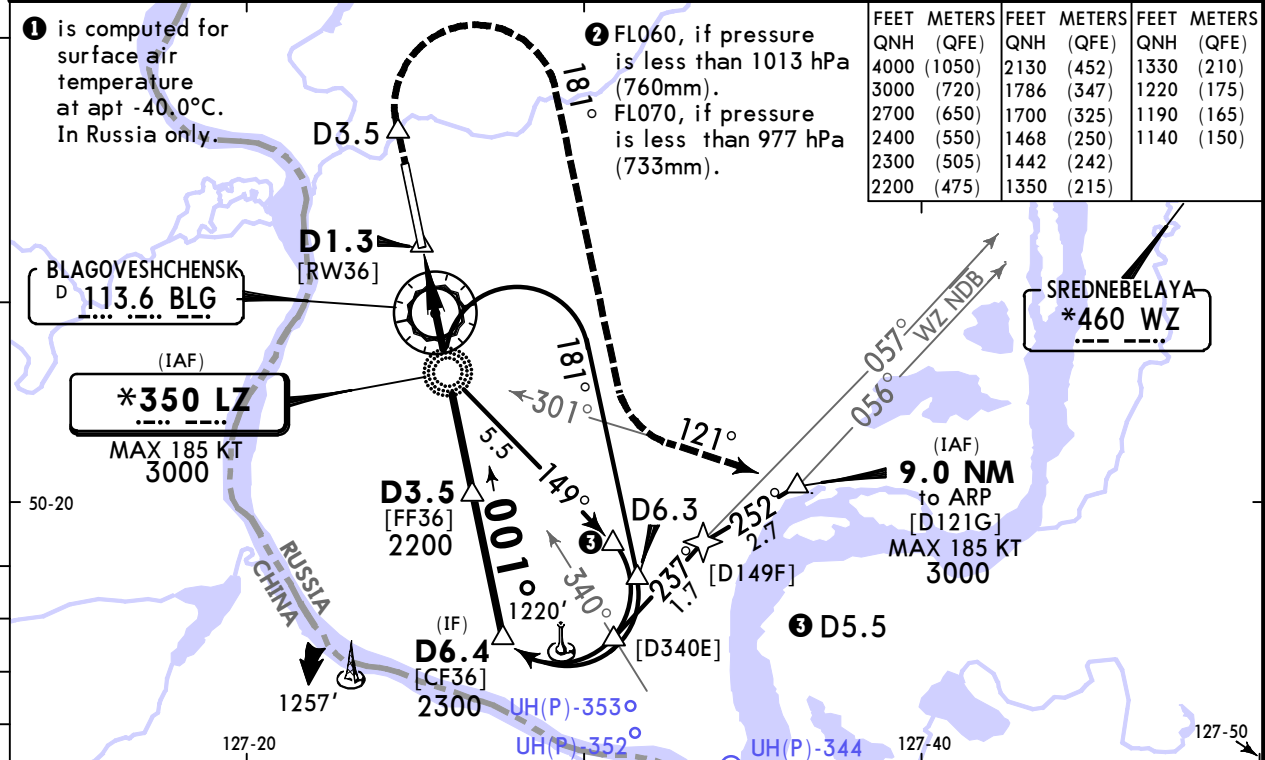

BLG DME	1.1	2.2	3.2
ALTITUDE	1442'	1786'	2130'

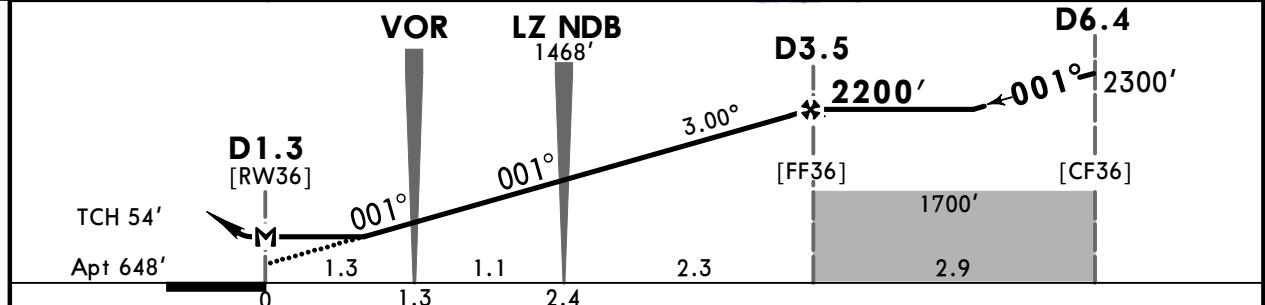

Gnd speed-Kts	70	90	100	120	140	160	HIALS 	D3.5 	181°
Descent Angle	3.00°	372	478	531	637	743			

Std STRAIGHT-IN LANDING CDFA DA/MDA(H) 1140' (492')				CIRCLE-TO-LAND PROHIBITED West of airport			
ALS out R1500m				Max KT MDA(H)			
A	R1500m			100	1190' (542') V1500m		
B	R1500m			135	1220' (572') V1600m		
C	R1500m			180	1330' (682') V2400m		
D	R2300m			205	1350' (702') V3600m		

Chart changes since cycle 07-2026

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
-----	-----------------	-------	----------	----------

BLAGOVESHCHENSK, (IGNATYEVO - UHBB)

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport UHBB