

List of pages in this Trip Kit

Trip Kit Index

Airport Information For HECA

Terminal Charts For HECA

Revision Letter For Cycle 22-2019

Change Notices

Notebook

General Information

Location: CAIRO EGY
ICAO/IATA: HECA / CAI
Lat/Long: N30° 06.7', E031° 24.8'
Elevation: 467 ft

Airport Use: Public
Daylight Savings: Not Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 4.0° E

Fuel Types: Jet A-1
Repair Types: Major Airframe, Major Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: Yes

Sunrise: 0412 Z
Sunset: 1504 Z

Runway Information

Runway: 05C
Length x Width: 13120 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 382 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 05L
Length x Width: 10830 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 190 ft
Lighting: Edge, ALS, Centerline

Runway: 05R
Length x Width: 13123 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 448 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 23C
Length x Width: 13120 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 375 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 23L
Length x Width: 13123 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 467 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 23R
Length x Width: 10830 ft x 197 ft
Surface Type: asphalt
TDZ-Elev: 199 ft
Lighting: Edge, ALS, Centerline

Communication Information


ATIS: 122.600
Cairo Tower: 118.100
Cairo Tower: 125.875 Secondary
Cairo Ground: 126.375 Secondary
Cairo Ground: 121.900
Cairo Ground: 120.400
Cairo Preflight Clearance Delivery: 127.600 Secondary
Cairo Preflight Clearance Delivery: 120.100
Cairo Approach: 124.375 Secondary
Cairo Approach: 119.050
Cairo Approach: 119.550 Secondary
Cairo Approach: 119.975 Secondary
Cairo Approach: 120.700 Secondary
Cairo Tma Terminal Control Area: 129.700 Secondary
Cairo Tma Terminal Control Area: 129.500 Secondary
Cairo Tma Terminal Control Area: 125.300
Cairo Tma Terminal Control Area: 130.500

HECA/CAI
CAIRO INTL

JEPPesen
5 JUL 13 (10-1R)

CAIRO, EGYPT

RADAR MINIMUM ALTITUDES

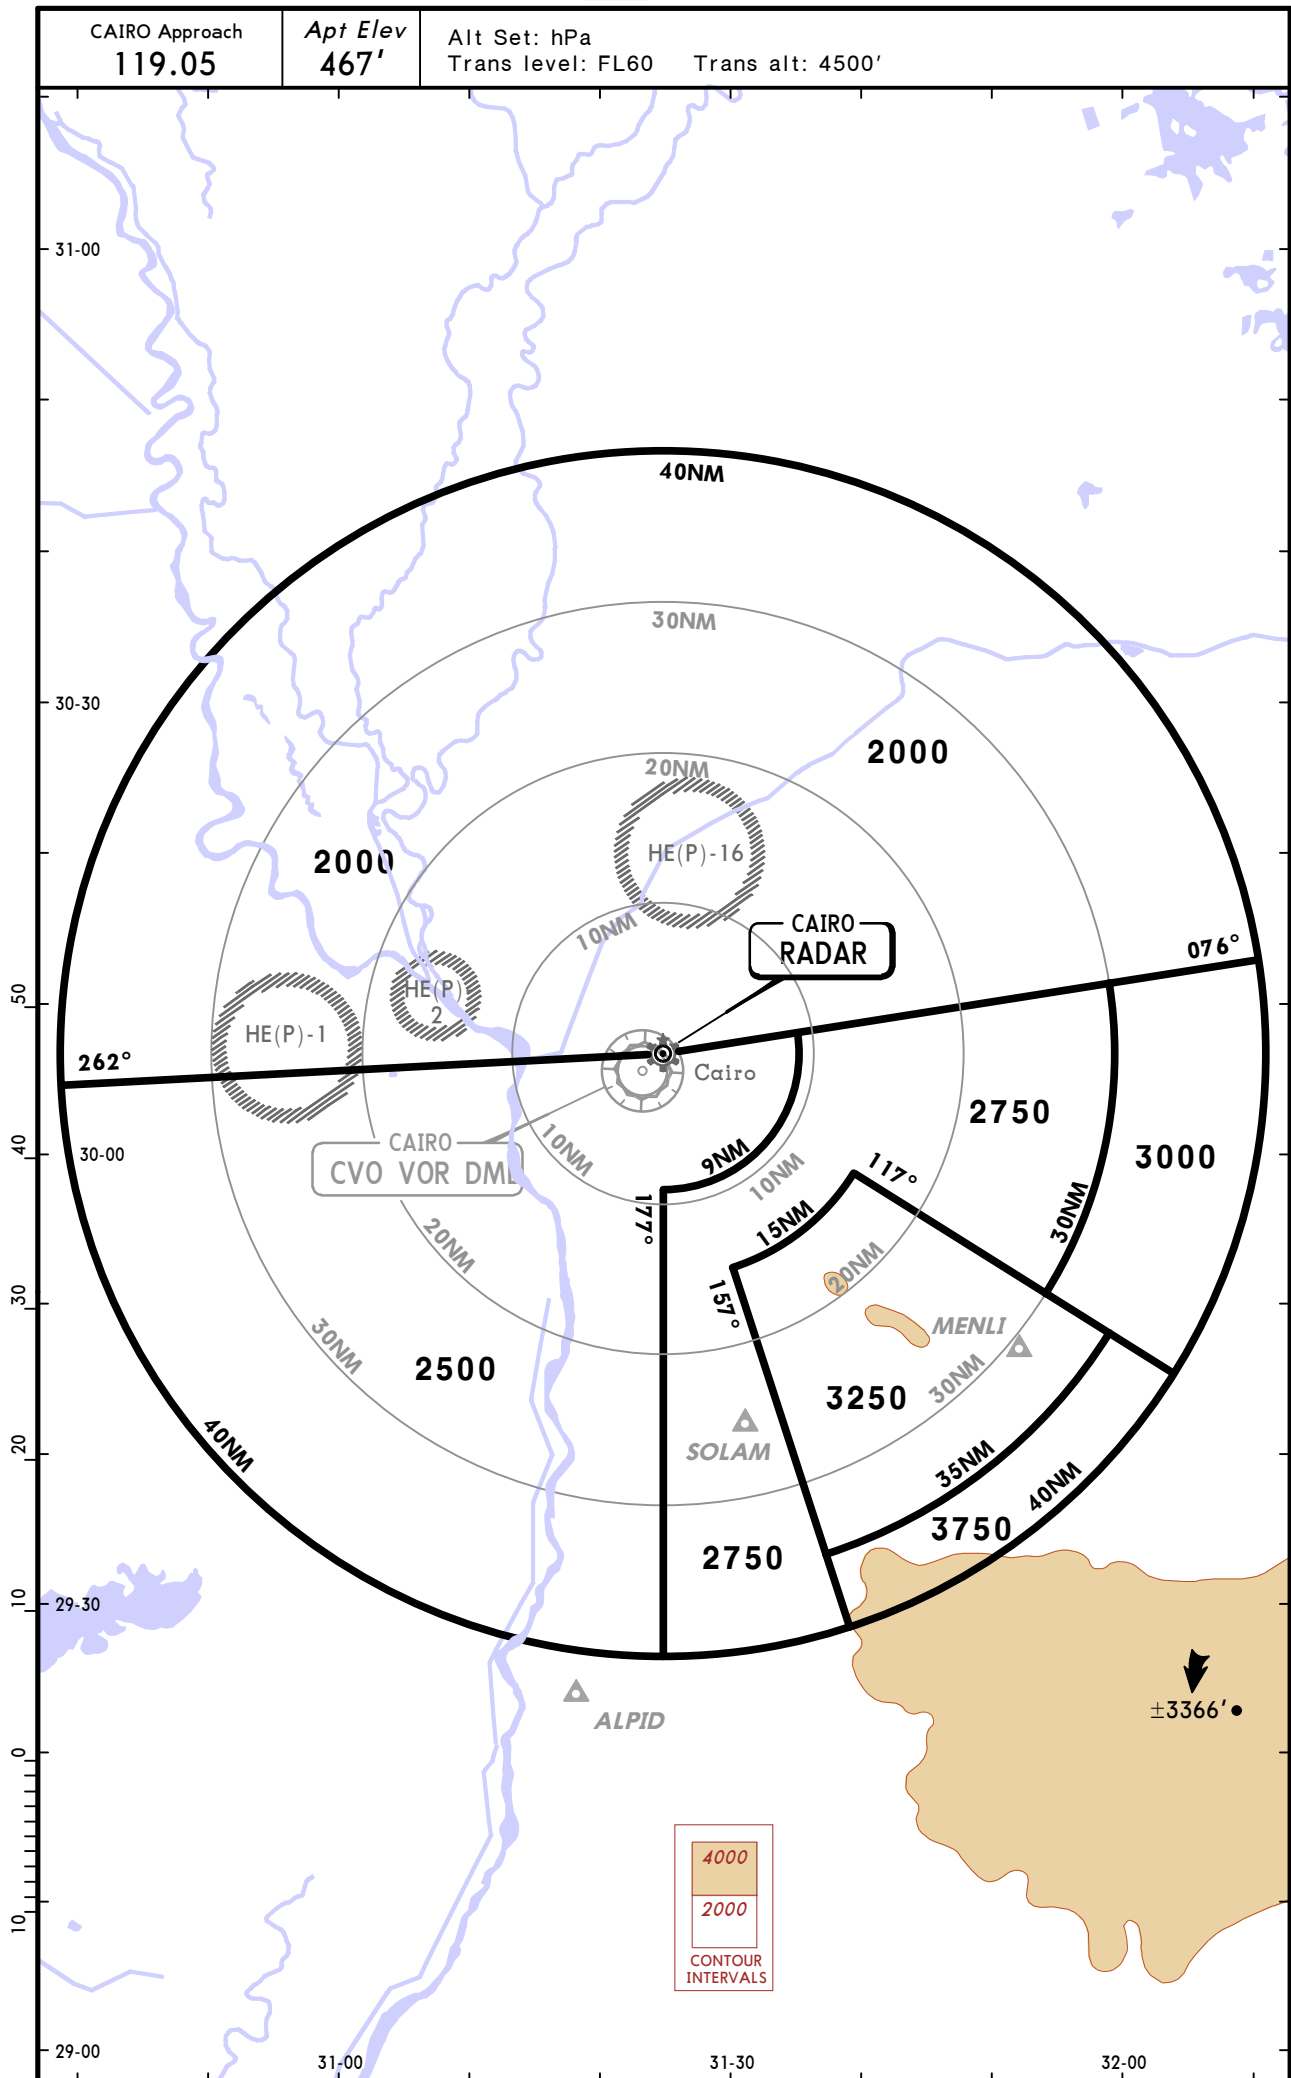

CHANGES: Reissue.

© JEPPESEN, 2007, 2013. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL



19 APR 19 10-3 Eff 25 Apr


CAIRO, EGYPT
RADAR DEPARTURE

CAIRO Approach
119.050

Apt Elev
467

Trans alt: 4500
1. Contact CAIRO Approach after take-off.
2. In case of use RWY 23R for departure follow ATC.

CAIRO 1A, CAIRO 1B
CAIRO 1C, CAIRO 1D
CAIRO 1E
RADAR DEPARTURES

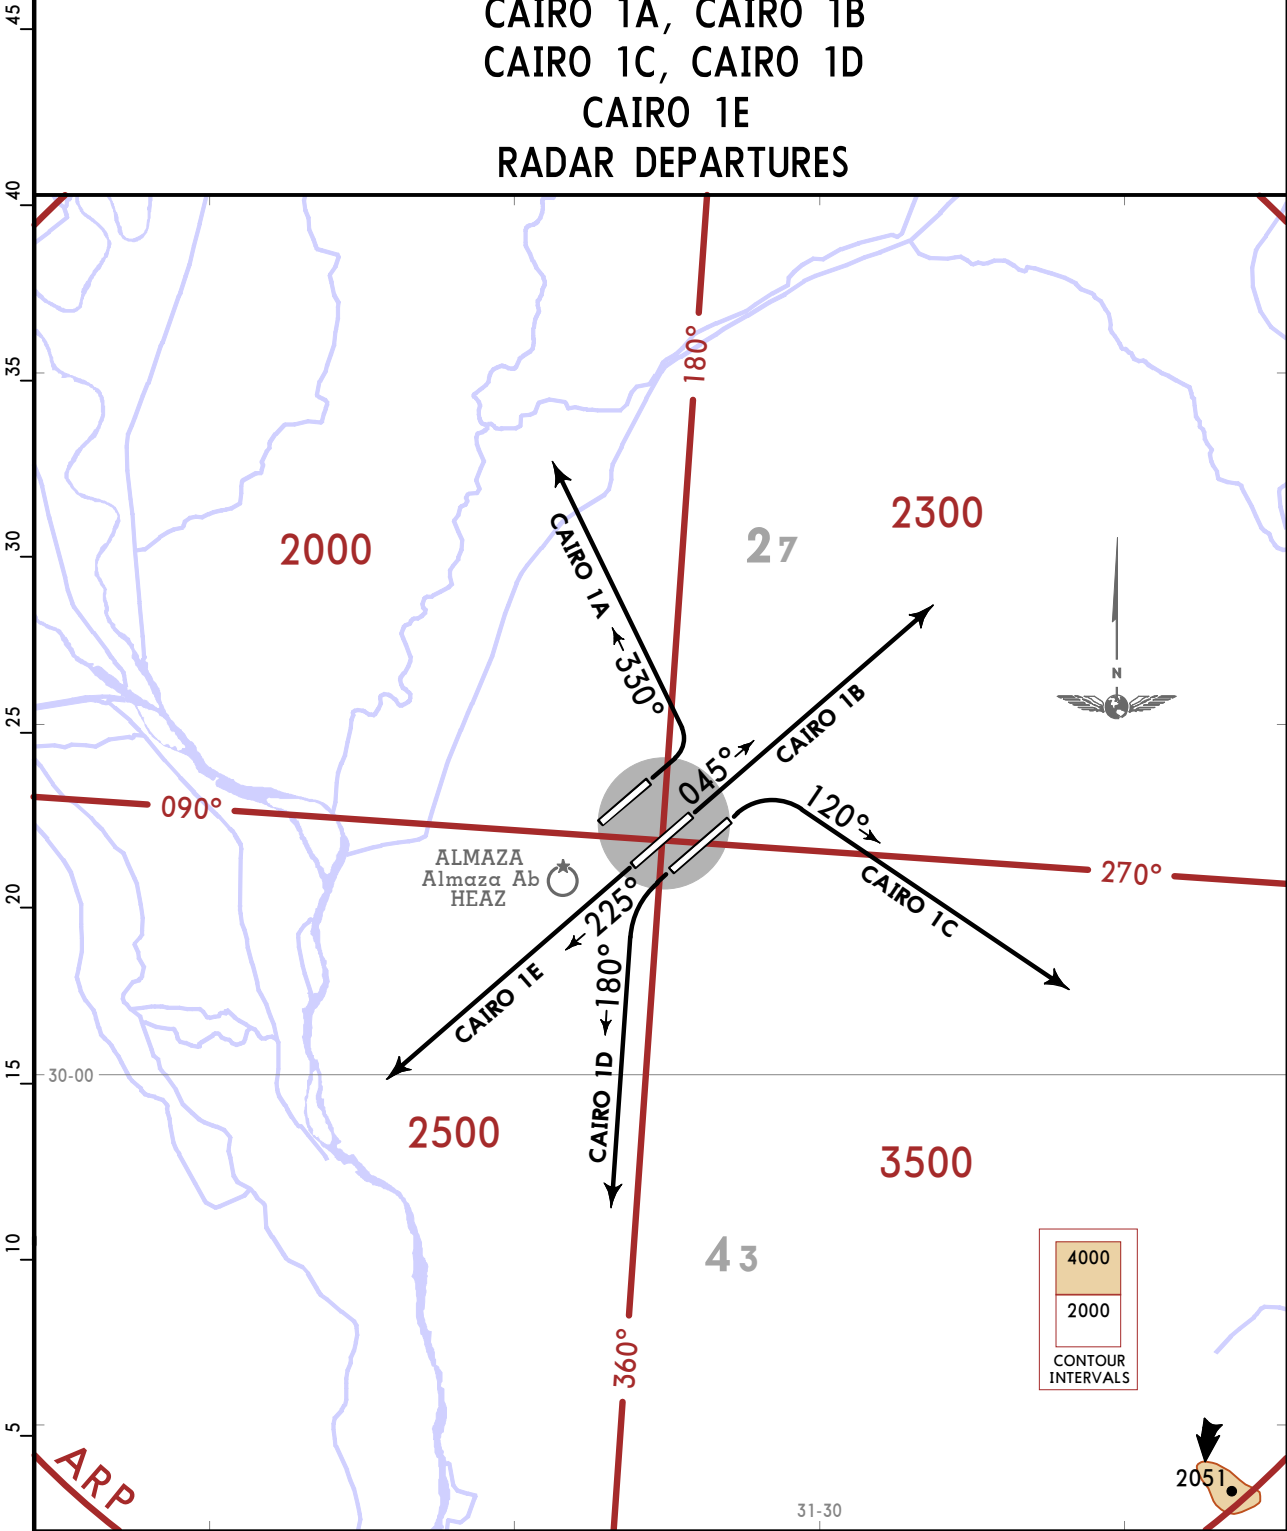

These SIDs require a minimum climb gradient of
CAIRO 1A: 334 per NM (5.5%) until 700.
CAIRO 1B, 1E: 334 per NM (5.5%) until 900.
CAIRO 1C, 1D: 334 per NM (5.5%) until 1000.

Gnd speed-KT	75	100	150	200	250	300
334' per NM	418	557	835	1114	1392	1671

Initial climb clearance **3500** or as directed by ATC

SID	RWY	ROUTING
CAIRO 1A	05L, 05C, 05R	Climb on 330° track, EXPECT RADAR vectors climbing through 3500.
CAIRO 1B		Climb on 045° track, EXPECT RADAR vectors climbing through 3500.
CAIRO 1C		Climb on 120° track, EXPECT RADAR vectors climbing through 3500.
CAIRO 1D	23L, 23C	Climb on 180° track, EXPECT RADAR vectors climbing through 3500.
CAIRO 1E		Climb on 225° track, EXPECT RADAR vectors climbing through 3500.

HECA/CAI
CAIRO INTL

 **JEPPESEN**
6 SEP 19 **10-4** Eff 12 Sep

CAIRO, EGYPT
NOISE

NOISE ABATEMENT

GENERAL

Flights within Cairo TMA shall not be flown below FL90 outside a circle of 25NM centered on CVO VOR DME.

The following noise abatement procedures shall apply for FAN JET ACFT.

RUNWAY USAGE

RWY 05L will be used for departures only.

RWY 23R will be used for arrivals and departures.

RWYs 05C/23C will be used for arrivals and departures.

RWYs 05R/23L will be used for arrivals and departures.

ARRIVALS

LOW-POWER/LOW-DRAG APPROACH

ACFT should maintain 250 KT IAS +_10 KT below FL100. Speed should be reduced continuously so as to reach 170 KT IAS +_10 KT IAS shortly prior to 5NM from RWY THR, except when ceiling is below 500' and/or ground visibility is less than 2km. Pilots unable to comply should advise ATC.

DEPARTURES

NADP 1 shall be applied for all take-offs in accordance with ICAO DOC 8168 VOL 1, appendix to chapter 3.

REVERSE THRUST

Idle reverse thrust is recommended during landing.

RUN-UP TESTS


Run-ups will be done on RWY before take-off.

HECA/CAI

Apt Elev **467'**
N30 06.7 E031 24.8

JEPPesen


6 SEP 19 **(10-9)** Eff 12 Sep

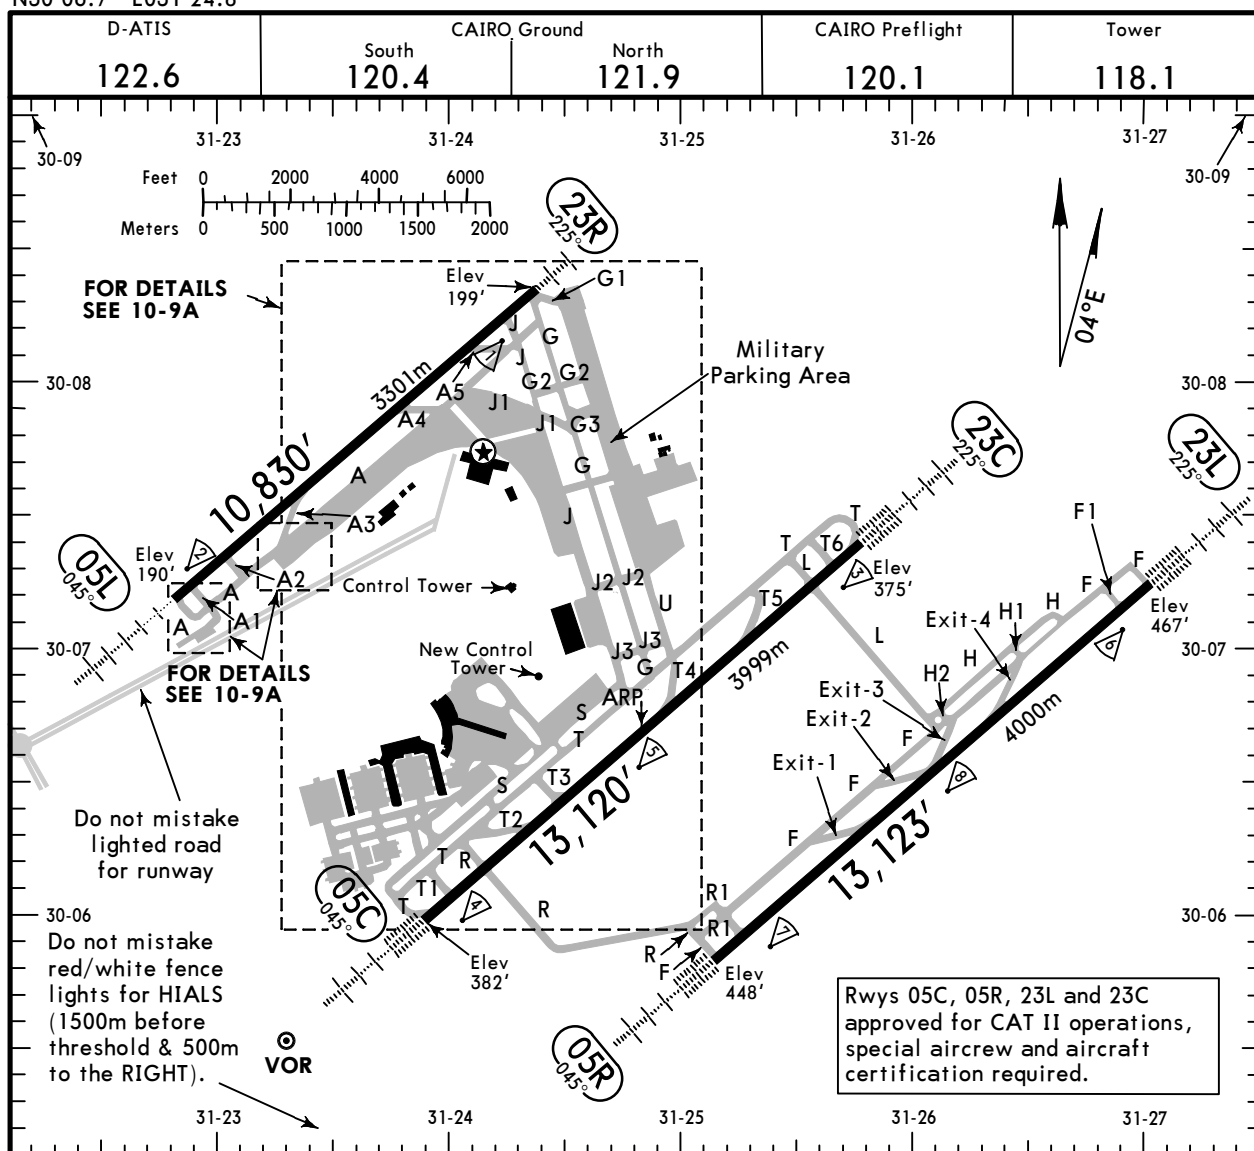CAIRO, EGYPT
CAIRO INTL

ADDITIONAL RUNWAY INFORMATION

RWY					USABLE LENGTHS		TAKE-OFF	WIDTH
					Threshold	Landing Beyond Glide Slope		
05L 23R	HIRL (60m) CL (30m) HIALS PAPI(3.0°)	RVR				9554' 2912m 9615' 2931m		197' 60m
05C 23C	HIRL (60m) CL (30m) HIALS-II TDZ PAPI(3.0°)	RVR				12,269' 3740m 12,087' 3684m		197' 60m
05R 23L	HIRL (60m) CL (30m) HIALS-II TDZ PAPI(3.0°)	RVR				12,029' 3666m 11,969' 3648m		197' 60m

TAKE-OFF

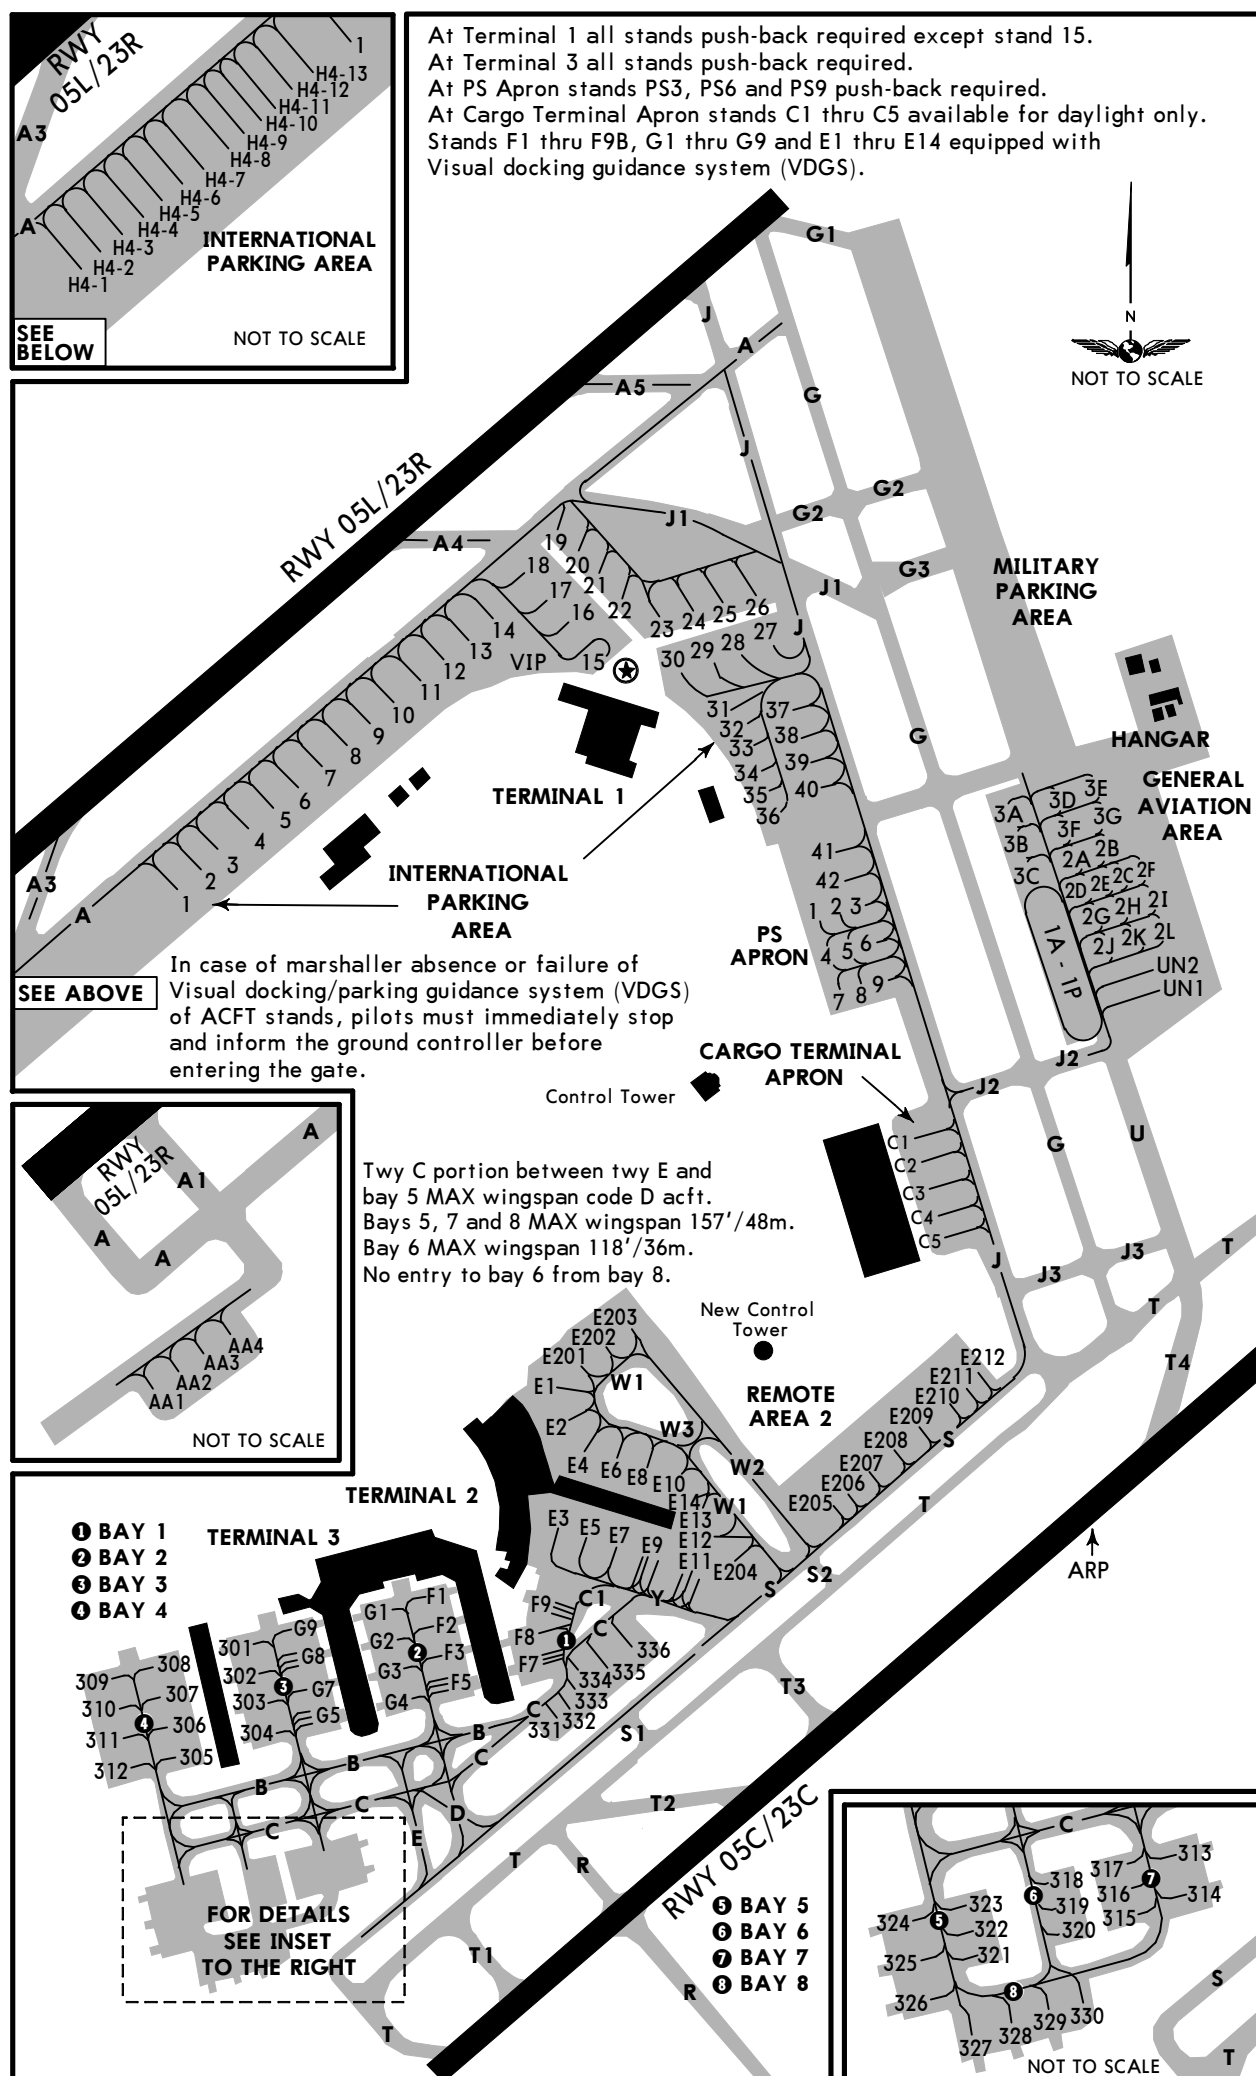AIR CARRIER (JAA) All Rwys				AIR CARRIER (FAR 121)		
LVP must be in force				Rwy 05C, 23C	Rwy 05L, 23R	All Rwys
RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL		CL & RCLM any RVR out, other two req.	CL & RCLM two RVR operating	Adequate Vis Ref
A				2 Eng		
B	200m (150m)	250m	400m	TDZ RVR 200m Mid RVR 200m Roll out RVR 150m	TDZ RVR 200m Roll out RVR 150m	RVR 500m VIS 400m
C				3 & 4 Eng		
D	250m (200m)	300m				



HECA/CAI


JEPPESSEN
6 SEP 19 (10-9B) Eff 12 Sep

CAIRO, EGYPT

CAIRO INTL

INS COORDINATES							
STAND No.	COORDINATES		ELEV	STAND No.	COORDINATES		ELEV
1	N30 07.5	E031 23.5	208	316	N30 06.2	E031 23.7	382
2, 3	N30 07.5	E031 23.6	208	317	N30 06.3	E031 23.7	381
4	N30 07.6	E031 23.6	207	318	N30 06.3	E031 23.7	379
5 thru 7	N30 07.6	E031 23.7	205	319	N30 06.2	E031 23.7	380
8, 9	N30 07.6	E031 23.7	206	320	N30 06.2	E031 23.7	381
10	N30 07.7	E031 23.8	211	321	N30 06.2	E031 23.6	378
11	N30 07.7	E031 23.9	210	322	N30 06.2	E031 23.6	377
12	N30 07.8	E031 23.9	211	323	N30 06.2	E031 23.6	376
13	N30 07.8	E031 23.9	212	324	N30 06.2	E031 23.5	375
14	N30 07.8	E031 24.0	212	325	N30 06.2	E031 23.5	376
15	N30 07.8	E031 24.1	224	326	N30 06.1	E031 23.5	378
16	N30 07.8	E031 24.1	220	327	N30 06.1	E031 23.6	380
17	N30 07.8	E031 24.0	217	328	N30 06.1	E031 23.6	382
18	N30 07.9	E031 24.0	213	329	N30 06.1	E031 23.6	383
19	N30 07.9	E031 24.1	215	330	N30 06.1	E031 24.1	383
20	N30 07.9	E031 24.1	218	331	N30 06.4	E031 24.1	384
21	N30 07.9	E031 24.1	222	332, 333	N30 06.4	E031 24.1	383
22	N30 07.8	E031 24.1	225	334	N30 06.5	E031 24.1	384
23	N30 07.8	E031 24.2	231	335	N30 06.5	E031 24.1	386
24	N30 07.8	E031 24.3	234	336	N30 06.5	E031 24.2	387
25	N30 07.8	E031 24.3	236	AA1	N30 07.0	E031 22.9	209
26	N30 07.8	E031 24.4	239	AA2	N30 07.0	E031 22.9	211
27	N30 07.8	E031 24.4	244	AA3, AA4	N30 07.1	E031 23.0	210
28	N30 07.8	E031 24.3	242	C1	N30 07.2	E031 24.6	319
29	N30 07.8	E031 24.3	239	C2	N30 07.1	E031 24.6	320
30	N30 07.8	E031 24.2	236	C3	N30 07.1	E031 24.6	322
31	N30 07.7	E031 24.3	242	C4	N30 07.1	E031 24.6	324
32	N30 07.7	E031 24.3	245	C5	N30 07.0	E031 24.6	325
33	N30 07.7	E031 24.3	248	E1	N30 06.8	E031 24.0	330
34	N30 07.6	E031 24.3	251	E2	N30 06.8	E031 24.0	331
35	N30 07.6	E031 24.3	253	E4, E4	N30 06.7	E031 24.1	334
36	N30 07.6	E031 24.4	255	E5, E6	N30 06.7	E031 24.1	336
37	N30 07.7	E031 24.4	249	E7	N30 06.7	E031 24.1	339
38	N30 07.7	E031 24.4	252	E8	N30 06.7	E031 24.2	339
39	N30 07.6	E031 24.4	257	E9, E9R	N30 06.6	E031 24.2	342
40	N30 07.6	E031 24.4	260	E9L	N30 06.6	E031 24.2	341
41	N30 07.5	E031 24.4	267	E10	N30 06.7	E031 24.2	330
42	N30 07.5	E031 24.5	272	E11, E11R	N30 06.6	E031 24.3	345
301	N30 06.5	E031 23.6	375	E11L	N30 06.6	E031 24.2	345
302	N30 06.5	E031 23.6	376	E12, E13	N30 06.7	E031 24.3	344
303, 304	N30 06.4	E031 23.6	376	E14	N30 06.7	E031 24.2	341
305, 306	N30 06.4	E031 23.5	376	E201	N30 06.9	E031 24.1	330
307	N30 06.5	E031 23.5	376	E202, E203	N30 06.9	E031 24.1	329
308	N30 06.5	E031 23.5	375	E204	N30 06.6	E031 24.3	347
309	N30 06.5	E031 23.4	370	E205	N30 06.7	E031 24.4	364
310, 311	N30 06.4	E031 23.4	372	E206	N30 06.7	E031 24.5	364
312	N30 06.4	E031 23.4	371	E207	N30 06.8	E031 24.5	364
313	N30 06.3	E031 23.8	385	E208	N30 06.8	E031 24.5	362
314	N30 06.2	E031 23.8	386	E209	N30 06.8	E031 24.6	358
315	N30 06.2	E031 23.7	383	E210	N30 06.8	E031 24.6	355
				E211	N30 06.9	E031 24.6	352
				E212	N30 06.9	E031 24.6	350

CHANGES: Stands C1 thru C5 and E208 thru E212.

© JEPPESSEN, 2000, 2019. ALL RIGHTS RESERVED.

HECA/CAI


JEPPesen
6 SEP 19 (10-9C) Eff 12 Sep

CAIRO, EGYPT

CAIRO INTL

INS COORDINATES

STAND No.	COORDINATES	ELEV	STAND No.	COORDINATES	ELEV
F1	N30 06.6 E031 23.9	375	GENERAL AVIATION APRON		
F2	N30 06.6 E031 23.9	376	1A, 1B 1C thru 1L 1M thru 1P	N30 07.5 E031 24.8	
F3	N30 06.5 E031 23.9	376		N30 07.4 E031 24.8	
F5, F5A/B	N30 06.5 E031 23.9	377		N30 07.3 E031 24.8	
F7	N30 06.5 E031 24.0	378		N30 07.5 E031 24.8	320
F7A	N30 06.5 E031 24.0	379	2A	N30 07.5 E031 24.8	318
F7B, F8	N30 06.5 E031 24.0	378	2B		
F9	N30 06.6 E031 24.0	380			
F9A	N30 06.6 E031 24.0	381	2C	N30 07.5 E031 24.8	321
F9B	N30 06.6 E031 24.0	380	2D	N30 07.5 E031 24.8	325
			2E	N30 07.5 E031 24.8	324
			2F	N30 07.5 E031 24.8	323
G1	N30 06.6 E031 23.8	375	2G	N30 07.5 E031 24.8	327
G2, G3	N30 06.5 E031 23.8	376			
G4	N30 06.4 E031 23.8	377	2H	N30 07.5 E031 24.8	325
G5	N30 06.4 E031 23.7	376	2I	N30 07.5 E031 24.8	324
G5A	N30 06.4 E031 23.7	377	2J	N30 07.4 E031 24.8	330
			2K	N30 07.4 E031 24.8	329
G5B	N30 06.4 E031 23.7	376	2L	N30 07.4 E031 24.8	327
G7, G8	N30 06.5 E031 23.7	376			
G8A	N30 06.5 E031 23.7	377	3A	N30 07.6 E031 24.7	
G8B	N30 06.5 E031 23.7	376	3B	N30 07.5 E031 24.7	
G9	N30 06.5 E031 23.7	375	3C	N30 07.5 E031 24.8	
			3D	N30 07.6 E031 24.8	316
H4-1	N30 07.3 E031 23.3	202	3E	N30 07.6 E031 24.8	318
H4-2, H4-3	N30 07.4 E031 23.3	203			
H4-4	N30 07.4 E031 23.3	204	3F, 3G	N30 07.6 E031 24.8	320
H4-5	N30 07.4 E031 23.4	204	UN1	N30 07.4 E031 24.9	308
H4-6, H4-7	N30 07.4 E031 23.4	205	UN2	N30 07.4 E031 24.9	303
H4-8, H4-9	N30 07.4 E031 23.4	206			
H4-10	N30 07.4 E031 23.4	207			
H4-11	N30 07.4 E031 23.4	207			
H4-12, H4-13	N30 07.5 E031 23.5	207			
VIP	N30 07.8 E031 24.0	212			
PS APRON					
1	N30 07.5 E031 24.4	275			
2	N30 07.5 E031 24.5	276			
3	N30 07.5 E031 24.5	276			
4	N30 07.4 E031 24.5	278			
5	N30 07.4 E031 24.5	279			
6	N30 07.4 E031 24.5	281			
7	N30 07.4 E031 24.5	283			
8	N30 07.4 E031 24.5	284			
9	N30 07.4 E031 24.5	286			

HECA/CAI

JEPPESSEN
6 SEP 19 10-9S Eff 12 Sep

Standard
CAIRO, EGYPT
CAIRO INTL

STRAIGHT-IN RWY		A	B	C	D
05L	ILS	440'(250') R650m ①	452'(262') R650m ①	460'(270') R650m ①	471'(281') R650m ①
	ALS out	R1300m	R1300m	R1300m	R1400m
	LOC ②	760'(570') R1500m	760'(570') R1500m	760'(570') R1900m	760'(570') R1900m
	ALS out	R1500m	R1500m	R2400m	R2400m
	RNP (LNAV) ②	760'(570') R1900m	760'(570') R1900m	760'(570') R1900m	760'(570') R1900m
	ALS out	R1900m	R1900m	R2400m	R2400m
	VOR ②	760'(570') R1900m	760'(570') R1900m	760'(570') R1900m	760'(570') R1900m
	ALS out	R1900m	R1900m	R2400m	R2400m
05C	CAT 2 ILS	482'(100') RA104' R350m	491'(109') RA111' R350m	503'(121') RA119' R400m	517'(135') RA129' R400m
	ILS	611'(229') R600m	623'(241') R600m	631'(249') R600m	642'(260') R600m
	FULL	R600m ①	R600m ①	R600m ①	R600m ①
	TDZ or CL out	R1200m	R1300m	R1300m	R1300m
	ALS out	R1200m	R1300m	R1300m	R1300m
	LOC ②	710'(328') R800m	710'(328') R800m	710'(328') R800m	710'(328') R800m
	ALS out	R1500m	R1500m	R1500m	R1500m
05R	CAT 2 ILS	548'(100') RA90' R350m	548'(100') RA90' R350m	560'(112') RA100' R350m	574'(126') RA111' R400m
	ILS	677'(229') R600m	689'(241') R600m	697'(249') R600m	708'(260') R600m
	FULL	R600m ①	R600m ①	R600m ①	R600m ①
	TDZ or CL out	R1200m	R1300m	R1300m	R1300m
	ALS out	R1200m	R1300m	R1300m	R1300m
	LOC ②	800'(352') R900m	800'(352') R900m	800'(352') R900m	800'(352') R900m
	ALS out	R1500m	R1500m	R1600m	R1600m
23L	CAT 2 ILS	567'(100') RA101' R350m	567'(100') RA101' R350m	579'(112') RA115' R350m	593'(126') RA130' R400m
	ILS	697'(230') R600m	709'(242') R600m	717'(250') R600m	728'(261') R600m
	FULL	R600m ①	R600m ①	R600m ①	R600m ①
	TDZ or CL out	R1200m	R1300m	R1300m	R1300m
	ALS out	R1200m	R1300m	R1300m	R1300m
	LOC ②	970'(503') R1500m	970'(503') R1500m	970'(503') R1600m	970'(503') R1600m
	ALS out	R1500m	R1500m	R2400m	R2400m

① RVR 750m when a Flight Director or Autopilot or HUD to DA is not used.

② Continuous Descent Final Approach.

HECA/CAI

Standard

CAIRO, EGYPT

CAIRO INTL

STRAIGHT-IN RWY		A	B	C	D
23L (contd)	RNP (LNAV) ①	830'(363') R1000m	830'(363') R1000m	830'(363') R1000m	830'(363') R1000m
	ALS out	R1500m	R1500m	R1700m	R1700m
	VOR ①	970'(503') R1600m	970'(503') R1600m	970'(503') R1600m	970'(503') R1600m
	ALS out	R1600m	R1600m	R2400m	R2400m
23C	CAT 2 ILS	475'(100')	484'(109')	496'(121')	510'(135')
		RA 107' R350m	RA 116' R350m	RA 129' R400m	RA 143' R400m
	ILS	605'(230') R900m	617'(242') R900m	625'(250') R900m	636'(261') R900m
	ALS out	R1200m	R1300m	R1300m	R1300m
	LOC ①	760'(385') R1100m	760'(385') R1100m	760'(385') R1100m	760'(385') R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	RNP (LNAV) ①	810'(435') R1600m	810'(435') R1600m	810'(435') R1600m	810'(435') R1600m
	ALS out	R1600m	R1600m	R2000m	R2000m
	VOR ①	760'(385') R1400m	760'(385') R1400m	760'(385') R1400m	760'(385') R1400m
	ALS out	R1500m	R1500m	R1800m	R1800m
23R	ILS	658'(459') R1500m	670'(471') R1500m	678'(479') R2000m	689'(490') R2100m
	ALS out	R1500m	R1500m	R2200m	R2300m
	LOC ①	780'(581') R1500m	780'(581') R1500m	780'(581') R2400m	780'(581') R2400m
	RNP (LNAV) ①	830'(631') R2700m	830'(631') R2700m	830'(631') R2700m	830'(631') R2700m
	VOR ①	780'(581') R2500m	780'(581') R2500m	780'(581') R2500m	780'(581') R2500m

① Continuous Descent Final Approach.

TAKE-OFF				
	Low Visibility Take-off			
	RL, CL & relevant RVR	RL & CL	Day: RL & RCLM Night: RL or CL	Day: RL or RCLM Night: RL or CL
A				Adequate vis ref (Day only)
B	TDZ, MID, RO			
C	R150m	R200m	R300m	400m
D				500m


HECA/CAI

JEPPESSEN
7 JAN 11 **10-10** Eff 13 Jan

CAIRO, EGYPT
CAIRO INTL

CAIRO OUTER FIXES HOLDING PROCEDURES

Only to be used, when excessive holdings are expected.
Vectors to compulsory reporting points ALTOX and CRS
will be provided by ATC.

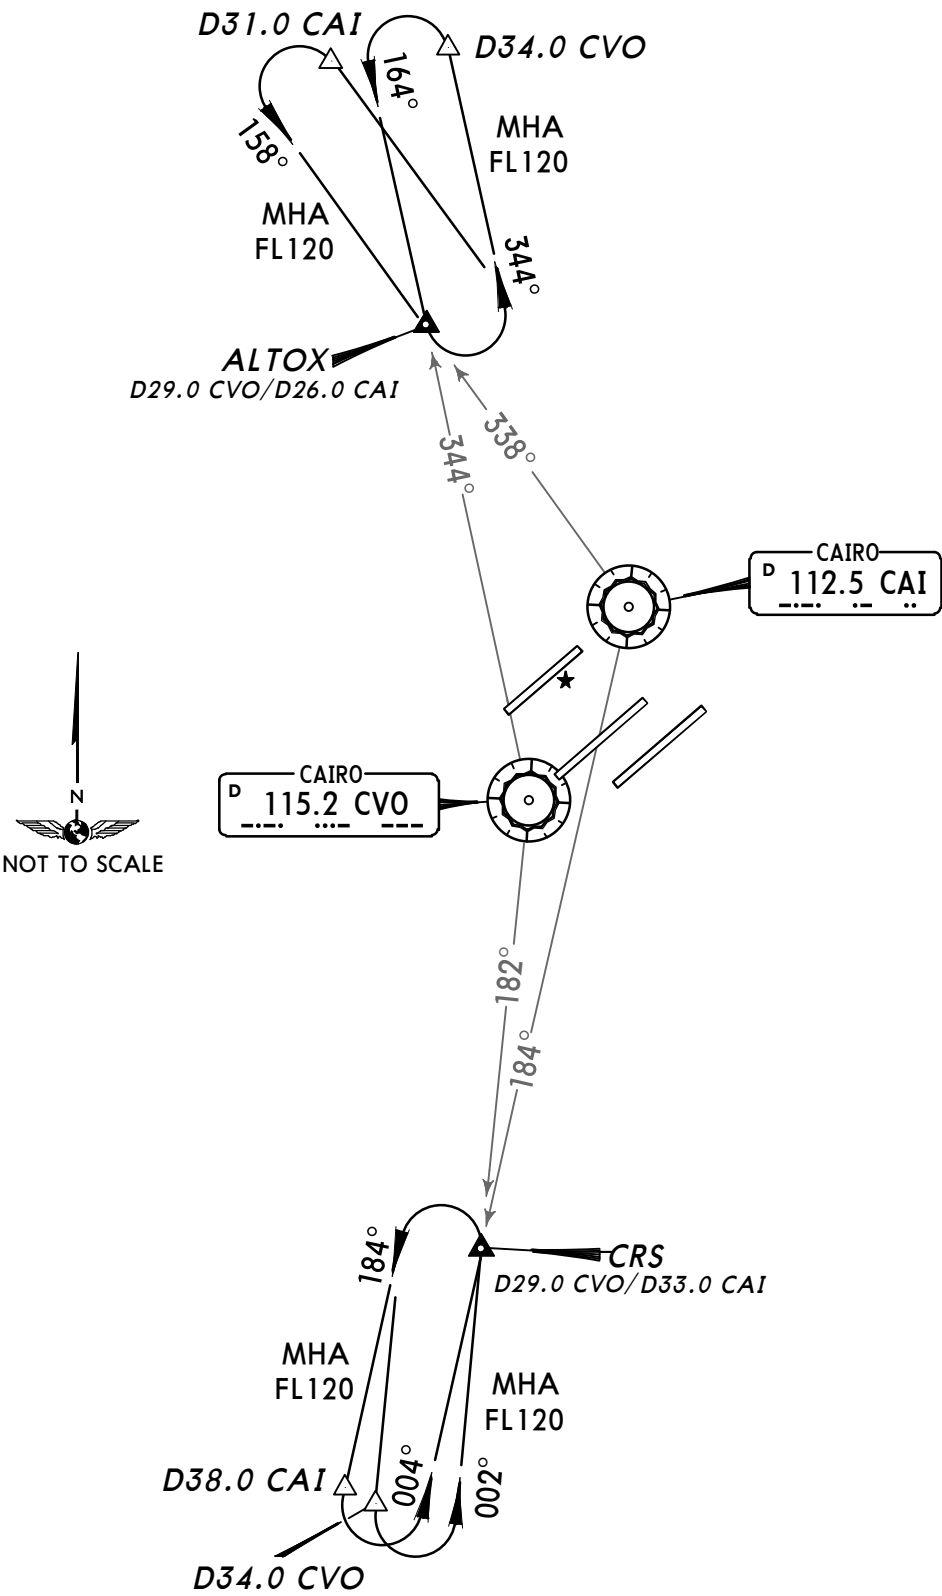

HECA/CAI
CAIRO INTL

JEPPESSEN

2 NOV 18




11-1

Eff 8 Nov

CAIRO, EGYPT

ILS or LOC Rwy 05L

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC IZFL 110.9	Final Apch Crs 045°	GS D4.0 IZFL 1450' (1260')	ILS DA(H) Refer to Minimums	Appt Elev 467' Rwy 190'
MISSED APCH: Immediately turn LEFT onto 320° climbing to 2500', then turn RIGHT to VOR and hold at 4000', or as directed.				
Alt Set: hPa	Rwy Elev: 7 hPa	Trans level: FL 60	Trans alt: 4500'	MSA CAI VOR

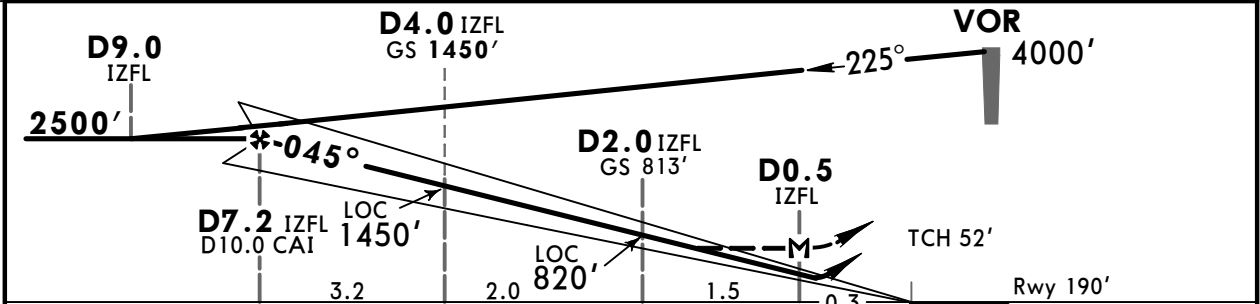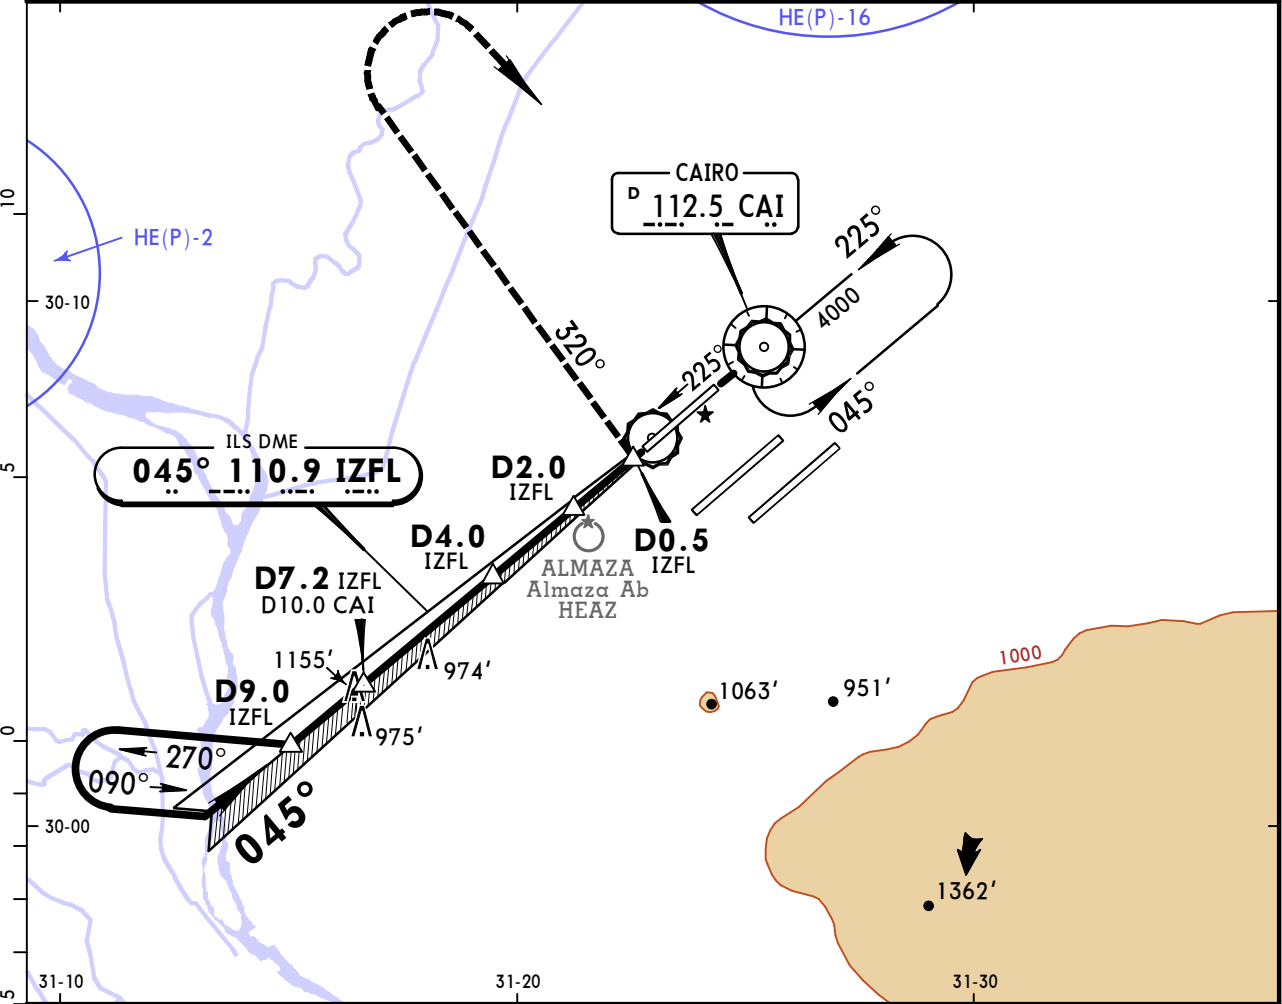

Gnd speed-Kts	70	90	100	120	140	160	HIALS	2500'	320°
ILS GS or							PAPI	PAPI	
LOC Descent Angle	3.00°	372	478	531	637	743	849		
MAP at D0.5 IZFL									

STRAIGHT-IN LANDING RWY 05L			
ILS		LOC (GS out)	
DA(H)		MDA(H)	
A: 440' (250') B: 452' (262')		C: 460' (270') D: 471' (281')	
FULL		ALS out	
A			
B	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m
C			RVR 1500m VIS 1600m
D		1200m	




PANS OPS

HECA/CAI
CAIRO INTL


JEPPESSEN
6 SEP 19 **(11-2)** Eff 12 Sep

CAIRO, EGYPT
ILS Rwy 05C

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC IZFC 109.9	Final Apch Crs 045°	GS D5.0 IZFC 1962' (1580')	ILS DA(H) Refer to Minimums	Apt Elev 467' Rwy 382'
MISSED APCH: Climb STRAIGHT AHEAD to 2000', then turn RIGHT climbing to reach VOR at 4500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 14 hPa	Trans level: FL 60	Trans alt: 4500'	

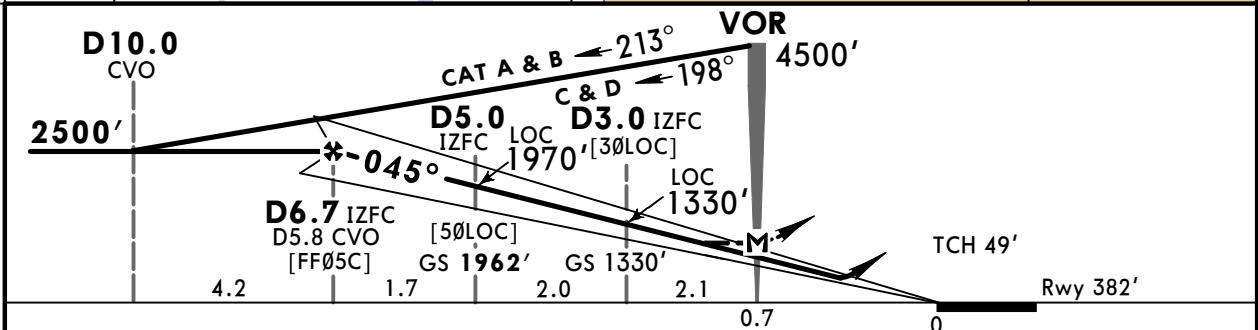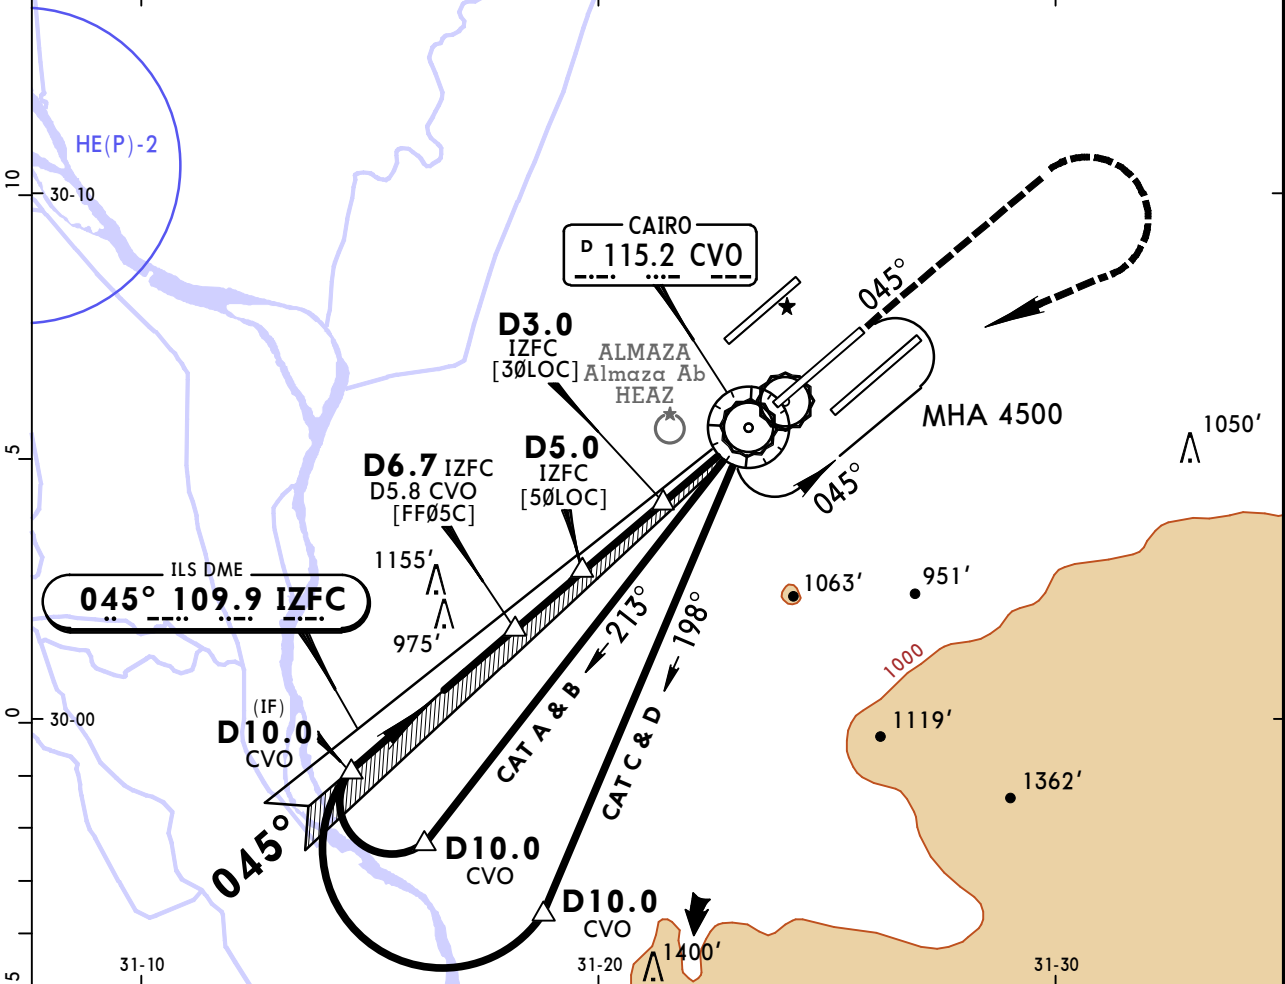

Gnd speed-Kts	70	90	100	120	140	160	
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849
MAP at VOR							



STRAIGHT-IN LANDING RWY 05C				LOC (GS out)	
ILS		DA(H)		MDA(H)	
A: 611' (229')		C: 631' (249')		710' (328')	
B: 623' (241')		D: 642' (260')			
FULL	TDZ or CL out	ALS out		ALS out	
A					
B	RVR 600m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	RVR 1500m VIS 1600m
C					
D				1200m	

CHANGES: None.

© JEPPESSEN, 2000, 2017. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL


JEPPESEN
6 SEP 19 **11-2A** Eff 12 Sep

CAIRO, EGYPT

CAT II ILS Rwy 05C



BRIEFING STRIP™

D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		South Ground 120.4		North 121.9	
LOC IZFC 109.9		Final Apch Crs 045°		GS D5.0 IZFC 1962' (1580')		CAT II ILS RA/DA(H) Refer to Minimums		Apt Elev 467' Rwy 382'	
MISSED APCH: Climb STRAIGHT AHEAD to 2000', then turn RIGHT climbing to reach VOR at 4500' and hold, or as directed.									
Alt Set: hPa		Rwy Elev: 14 hPa		Trans level: FL 60		Trans alt: 4500'			
Special Aircrew and Acft Certification Required.									



2000
090° → ← 270°
2500 ↑ 3500
360°

MSA CVO VOR

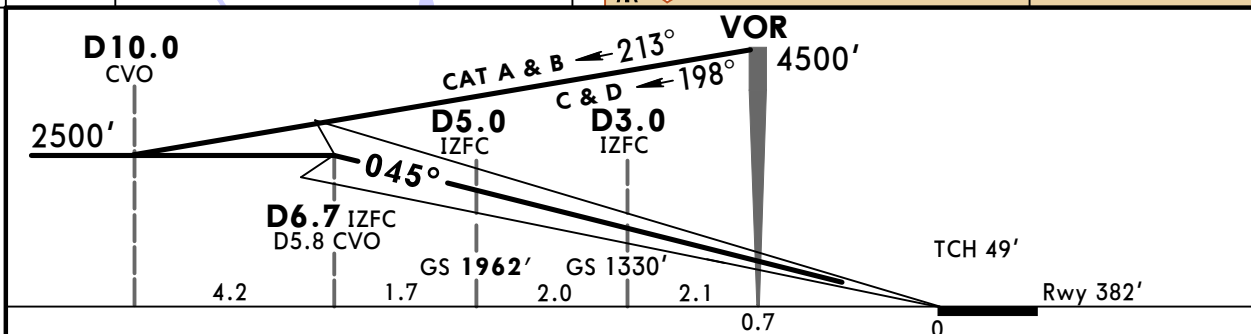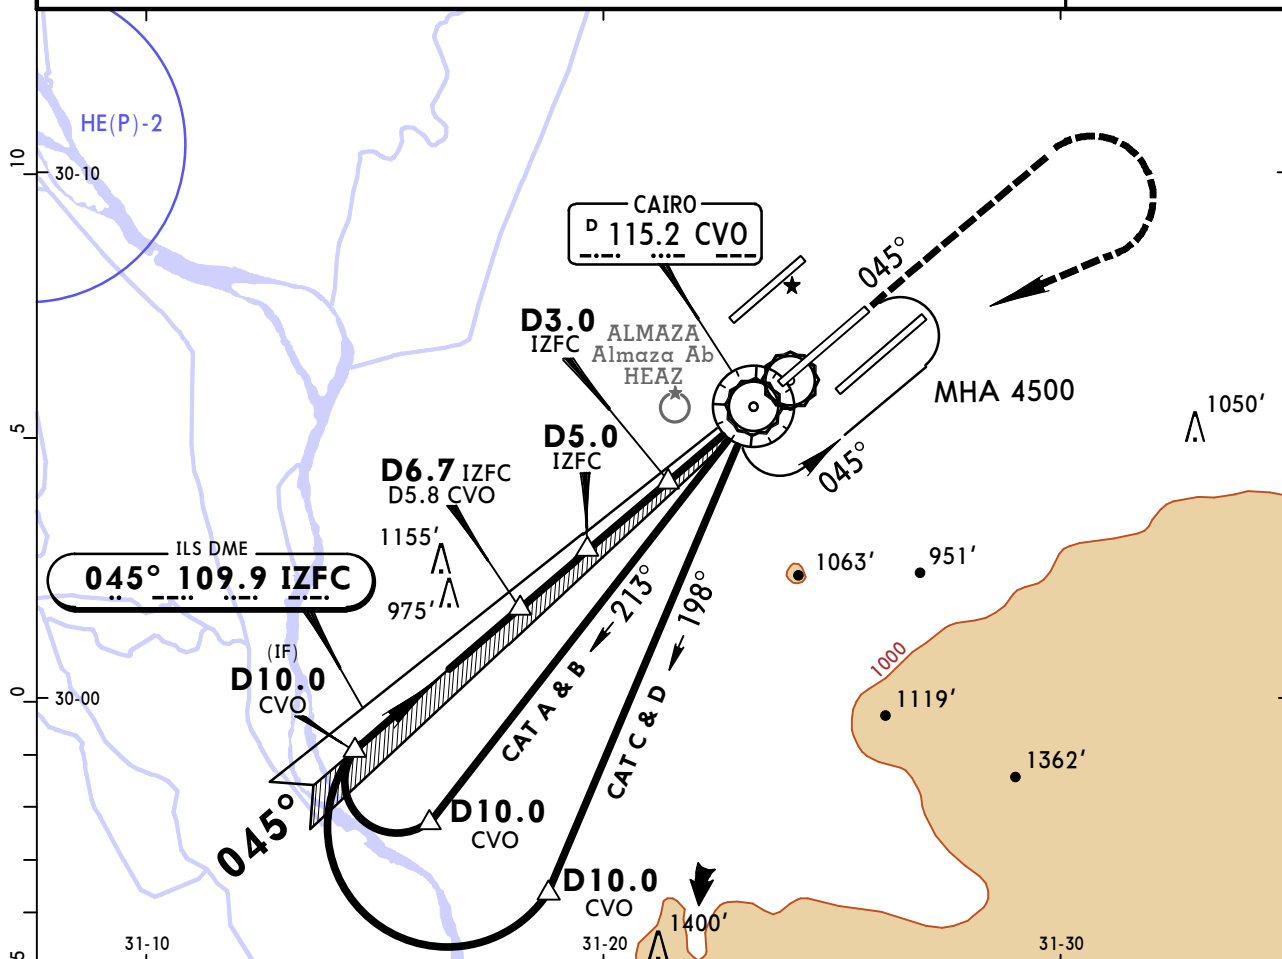

Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00°	372	478	531	637	743	

STRAIGHT-IN LANDING RWY 05C
CAT II ILS

A RA 104' DA(H) 482' (100')		B RA 111' DA(H) 491' (109')		C RA 119' DA(H) 503' (121')		D RA 129' DA(H) 517' (135')	
--	--	--	--	--	--	--	--

PANS OPS

RVR **350m**




RVR **400m**

HECA/CAI
CAIRO INTL

JEPPESEN
6 SEP 19 11-3 Eff 12 Sep

CAIRO, EGYPT
ILS Rwy 05R

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC IZFR 108.9	Final Apch Crs 045°	GS D5.0 IZFR 2040' (1592')	ILS DA(H) Refer to Minimums	Apt Elev 467' Rwy 448'
MISSED APCH: Immediately turn RIGHT to 080° climbing to 2000', then turn RIGHT climbing to reach VOR at 3500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 16 hPa	Trans level: FL 60	Trans alt: 4500'	

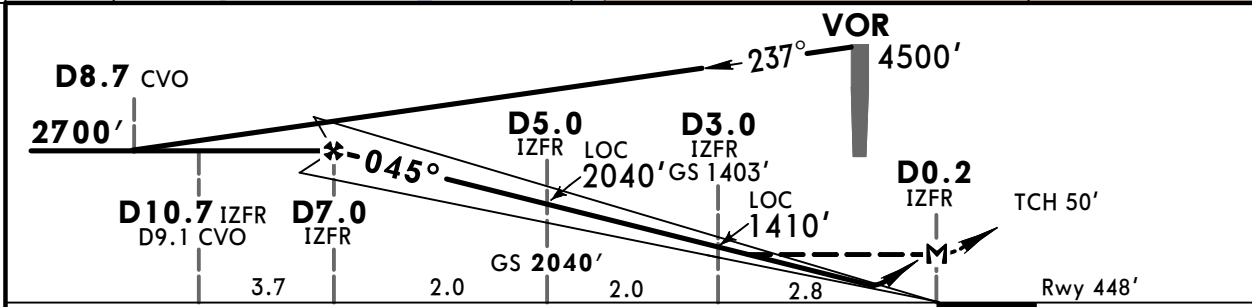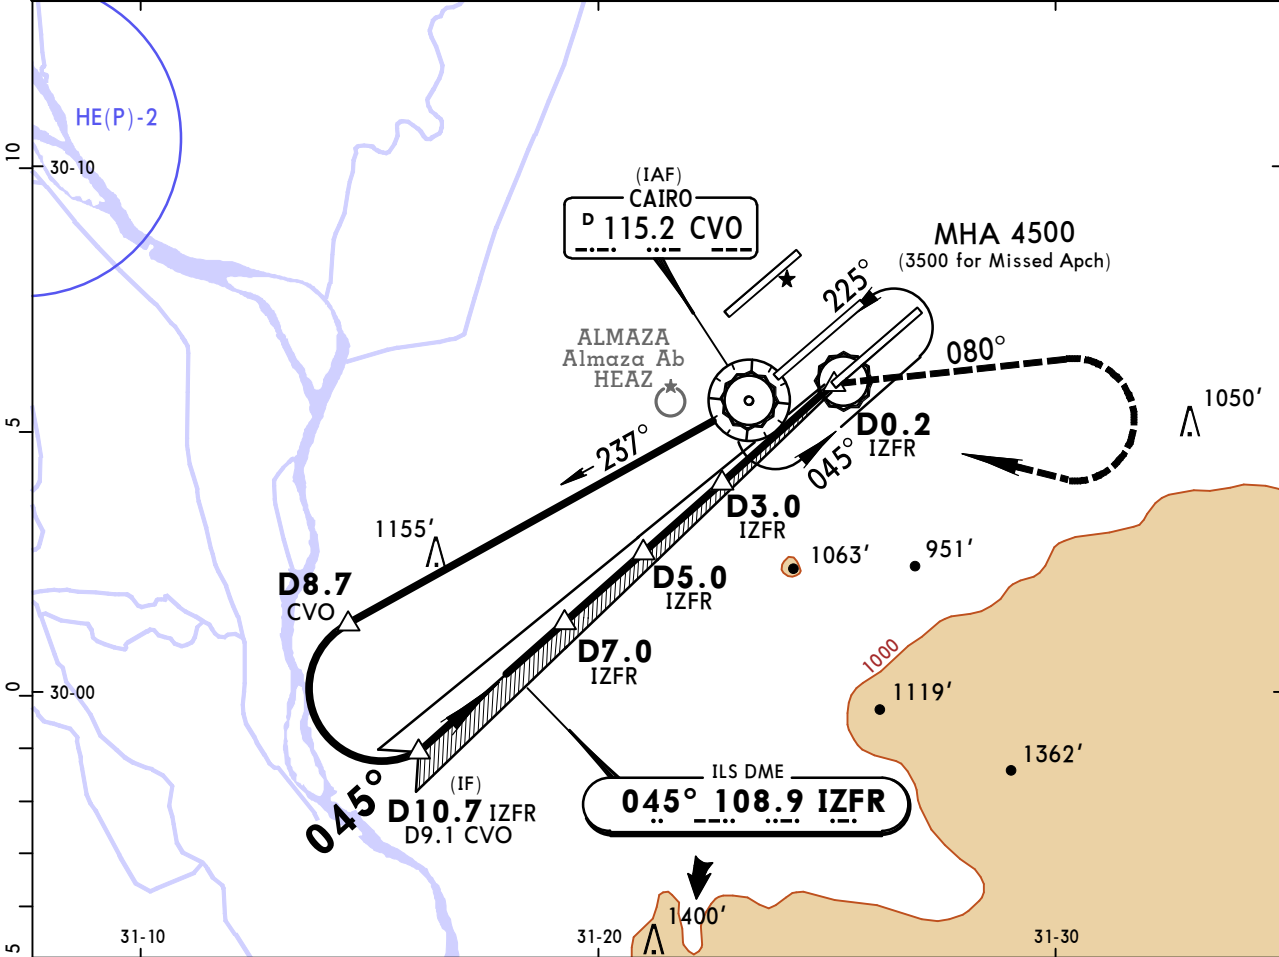

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	2000' on RT	080°
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743			
MAP at D0.2 IZFR									




STRAIGHT-IN LANDING RWY 05R					LOC (GS out)	
ILS DA(H) A: 677' (229') C: 697' (249') B: 689' (241') D: 708' (260')			MDA(H) 800' (352')			
FULL	TDZ or CL out	ALS out		ALS out		
A						
B	RVR 600m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m	RVR 1500m VIS 1600m	
C						
D				1200m	2000m	

HECA/CAI
CAIRO INTL

6 SEP 19 11-3A Eff 12 Sep

CAIRO, EGYPT
CAT II ILS Rwy 05R

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South Ground 120.4	North 121.9
LOC IZFR 108.9	Final Apch Crs 045°	GS D5.0 IZFR 2040' (1592')	CAT II ILS RA/DA(H) Refer to Minimums	Apt Elev 467' Rwy 448'
MISSED APCH: Immediately turn RIGHT to 080° climbing to 2000', then turn RIGHT climbing to reach VOR at 3500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 16 hPa	Trans level: FL 60	Trans alt: 4500'	

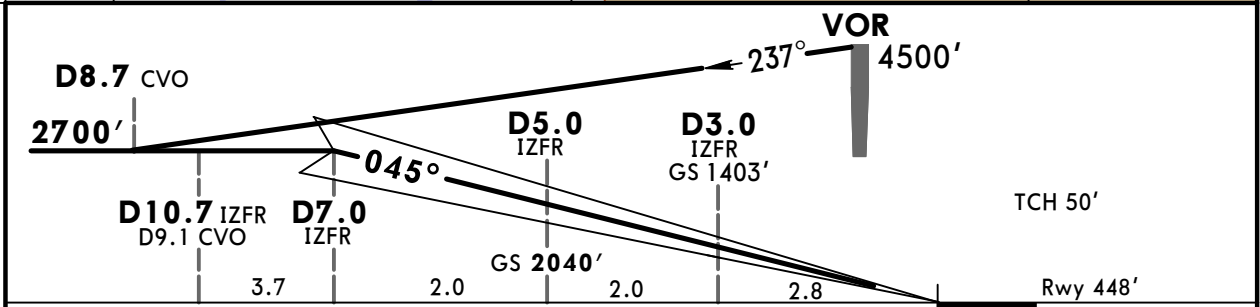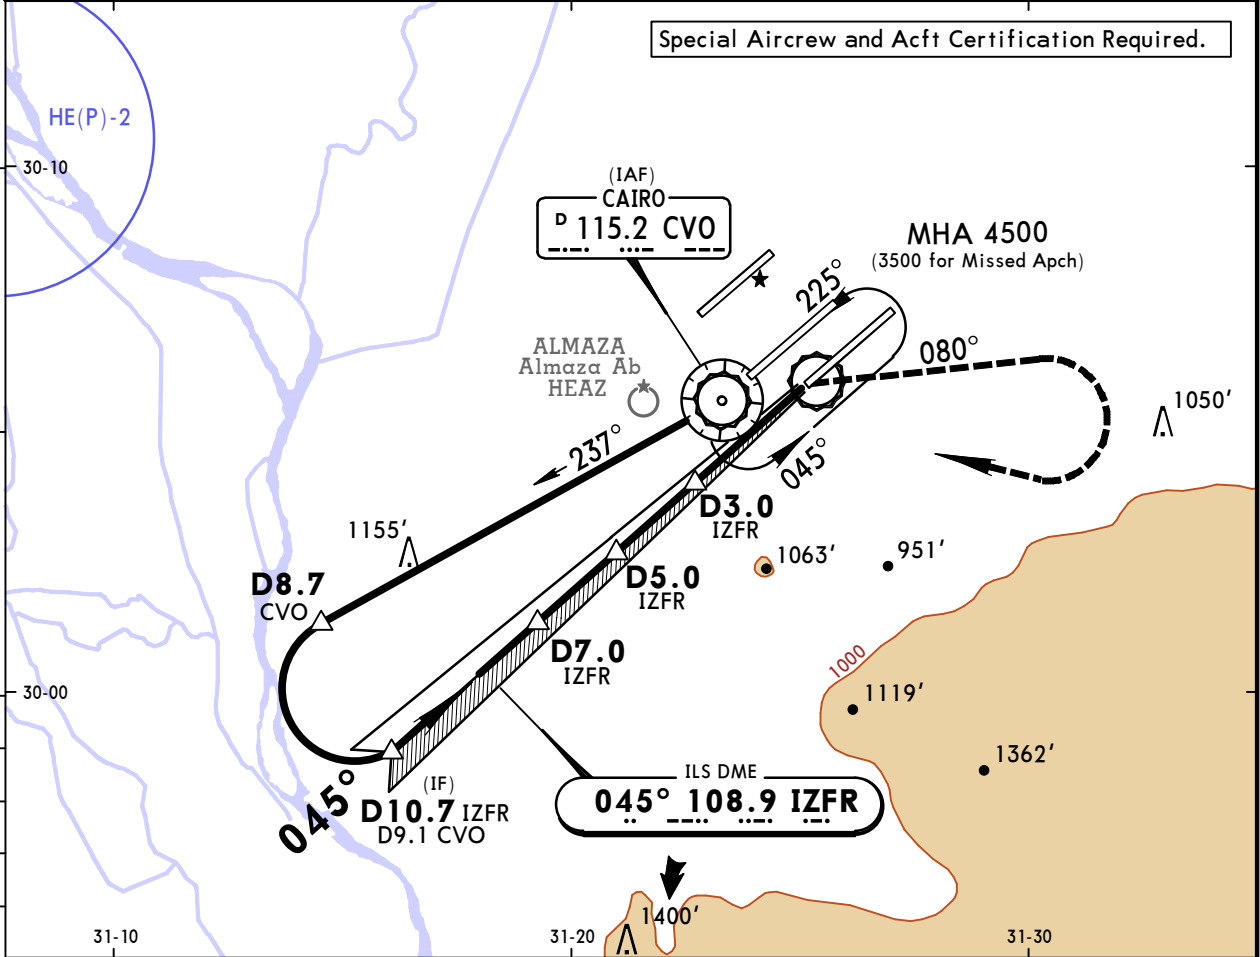

Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00°	372	478	531	637	743	849

HIALS-II
PAPI PAPI

2000'
on
RT 080°


STRAIGHT-IN LANDING RWY 05R CAT II ILS		
AB RA 90' DA(H) 548' (100')	C RA 100' DA(H) 560' (112')	D RA 111' DA(H) 574' (126')
RVR 350m		RVR 400m

HECA/CAI
CAIRO INTL



JEPPESEN
6 SEP 19 11-4 Eff 12 Sep

CAIRO, EGYPT
ILS Rwy 23L

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC ITTL 108.7	Final Apch Crs 225°	GS D3.0 ITTL 1409' (942')	ILS DA(H) Refer to Minimums	Apt Elev 467' Rwy 467'
MISSED APCH: Immediately turn LEFT to 200° climbing to 2000', then turn LEFT climbing to reach VOR at 3500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 17 hPa	Trans level: FL 60	Trans alt: 4500'	



MSA
CVO VOR

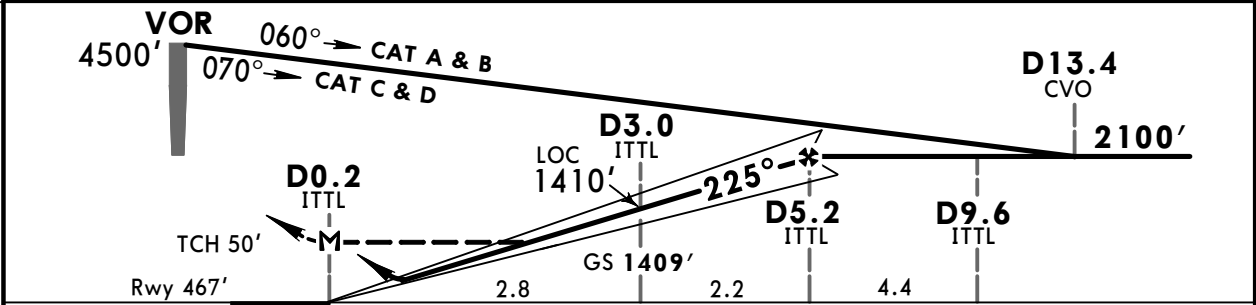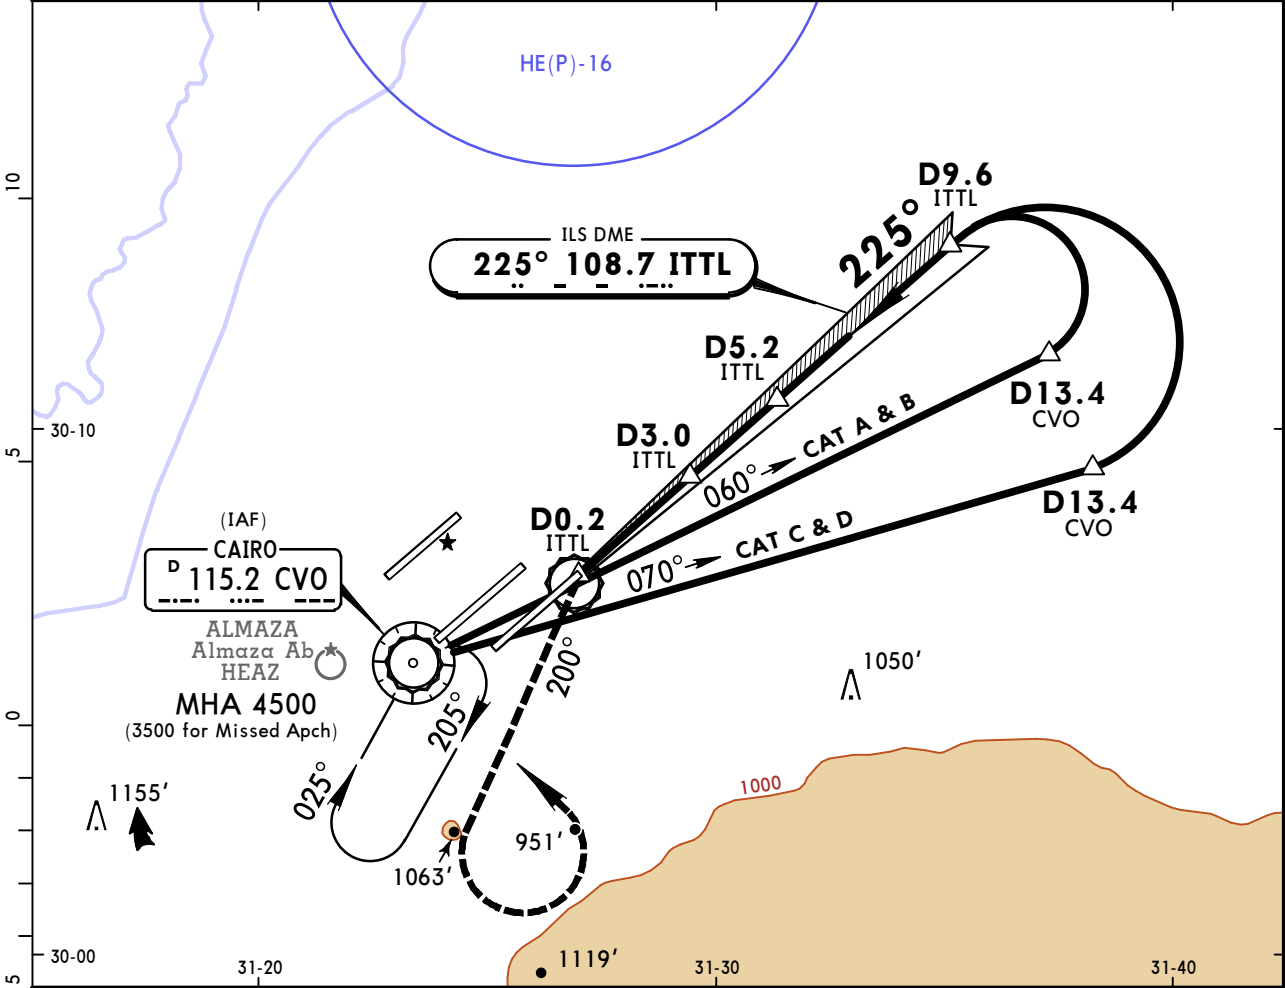

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	2000' LT on 200°
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743		
MAP at D0.2 ITTL								

STRAIGHT-IN LANDING RWY 23L					LOC (GS out)	
DA(H)		A: 697' (230') C: 717' (250')		B: 709' (242') D: 728' (261')		MDA(H) 970' (503')
FULL		TDZ or CL out		ALS out		ALS out
A	RVR 600m VIS 800m	RVR 720m VIS 800m	1200m	RVR 720m VIS 800m		RVR 1500m VIS 1600m
B				RVR 1500m VIS 1600m		2400m
C						
D						

CHANGES: None.


© JEPPESEN, 2010, 2016. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL



6 SEP 19 11-4A Eff 12 Sep

CAIRO, EGYPT
CAT II ILS Rwy 23L



D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC ITTL 108.7	Final Apch Crs 225°	GS D3.0 ITTL 1409' (942')	CAT II ILS RA/DA(H) Refer to Minimums	Apt Elev 467' Rwy 467'
MISSED APCH: Immediately turn LEFT to 200° climbing to 2000', then turn LEFT climbing to reach VOR at 3500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 17 hPa	Trans level: FL 60	Trans alt: 4500'	



MSA
CVO VOR

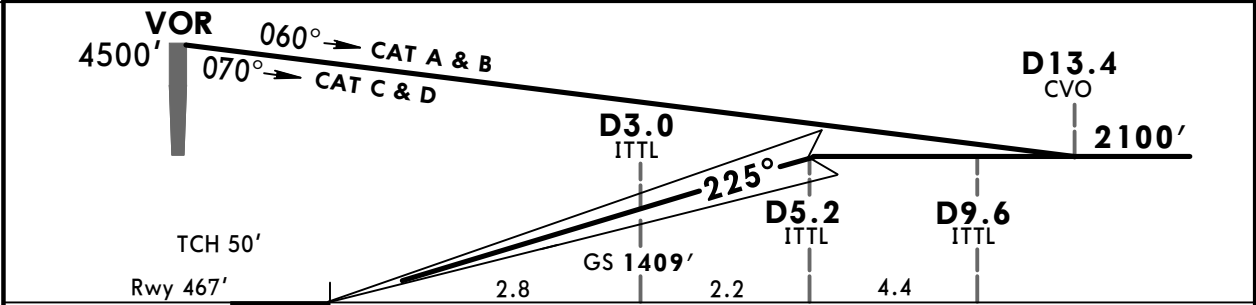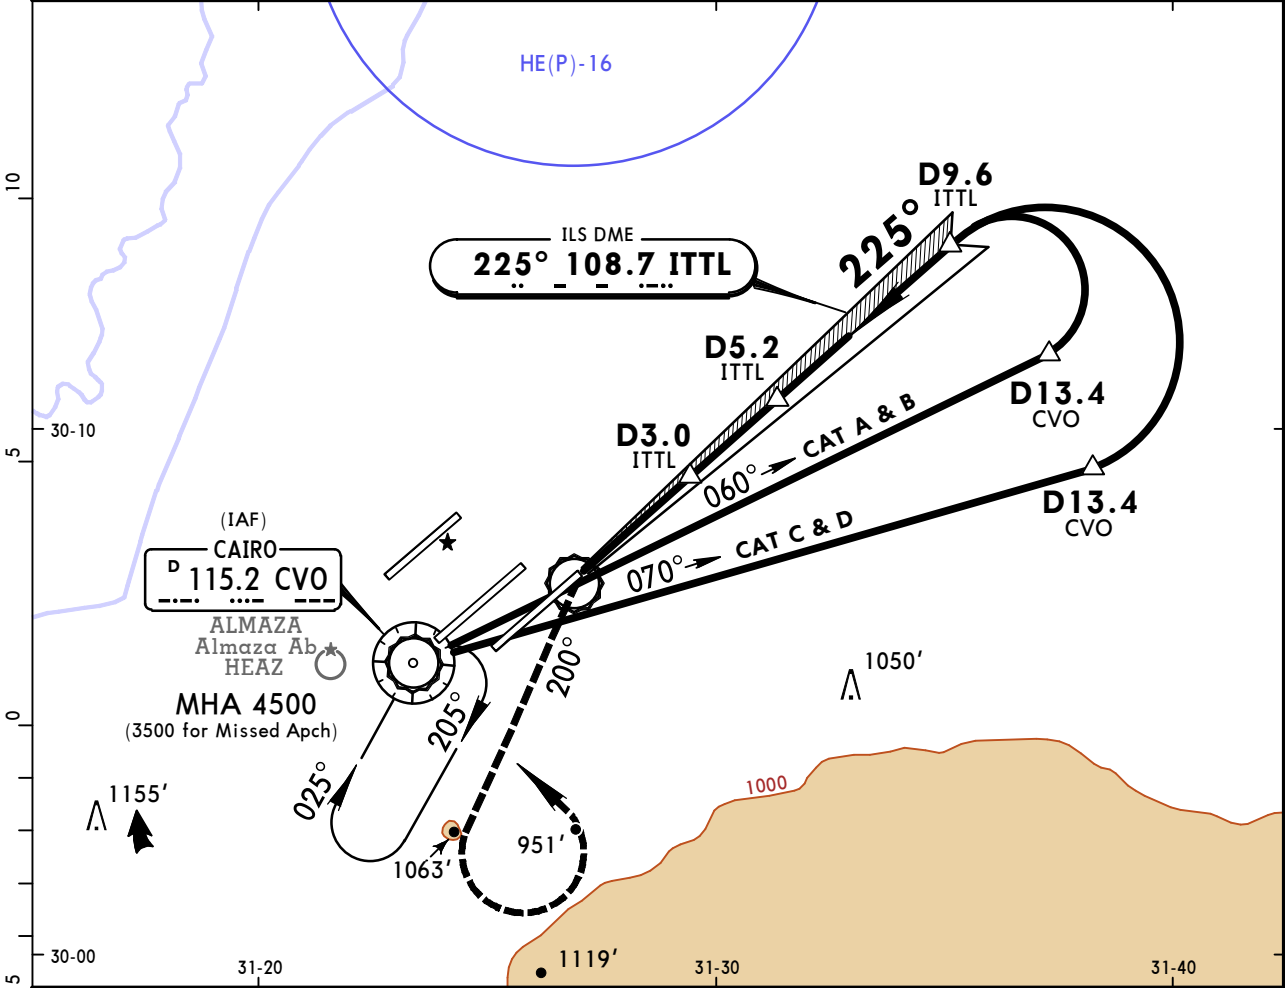

Gnd speed-Kts	70	90	100	120	140	160	
GS	3.00°	372	478	531	637	743	849



STRAIGHT-IN LANDING RWY 23L CAT II ILS		
AB RA 101' DA(H) 567' (100')	C RA 115' DA(H) 579' (112')	D RA 130' DA(H) 593' (126')
RVR 350m		RVR 400m

CHANGES: Minimums.


© JEPPESEN, 2015, 2019. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL



JEPPESEN
6 SEP 19 **(11-5)** Eff 12 Sep

CAIRO, EGYPT
ILS Rwy 23C

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South Ground 120.4	North 121.9
LOC ITTC 109.5	Final Apch Crs 225°	GS D3.0 ITTC 1323' (948')	ILS DA(H) Refer to Minimums	Apt Elev 467' Rwy 375'
MISSED APCH: Climb STRAIGHT AHEAD to 2000'. Not later than D4.5 CVO turn LEFT to reach VOR at 3500' and hold, or as directed.				
Alt Set: hPa	Rwy Elev: 14 hPa	Trans level: FL 60	Trans alt: 4500'	



MSA
CVO VOR

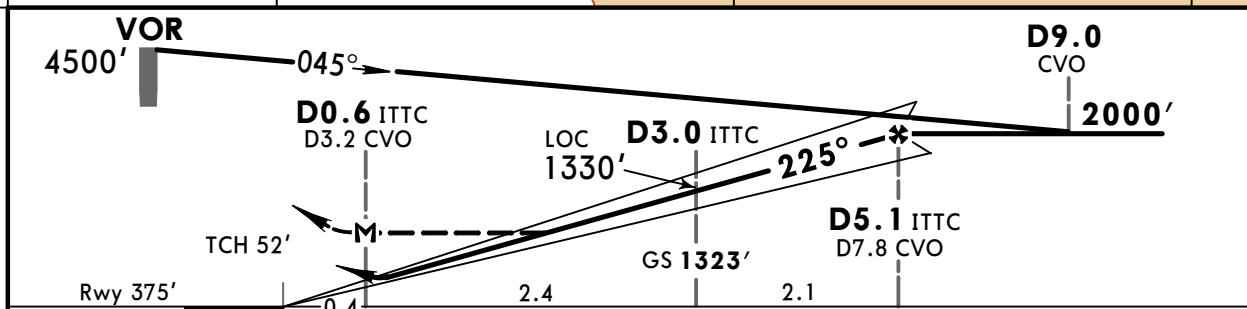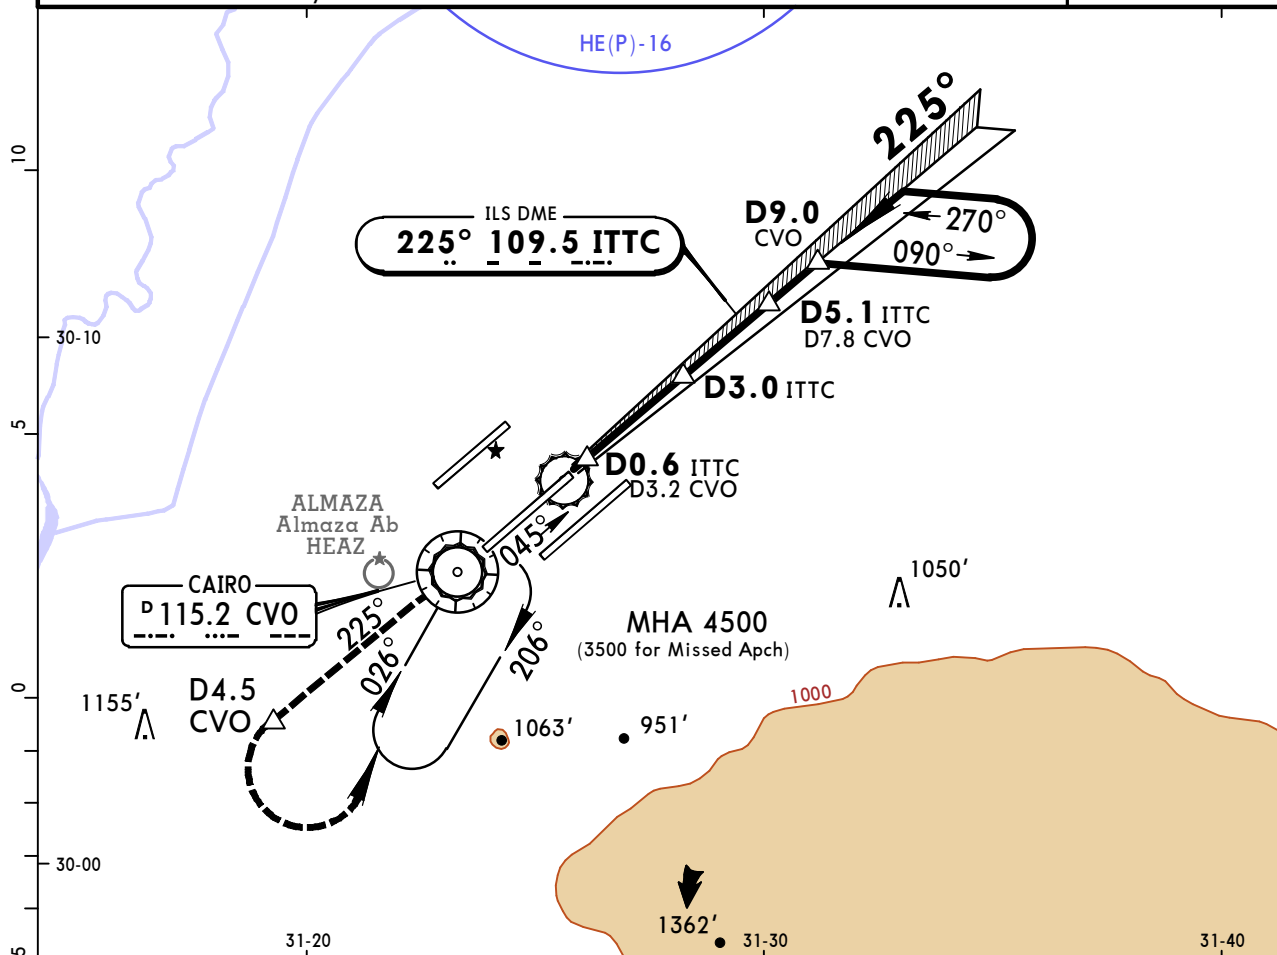

Gnd speed-Kts	70	90	100	120	140	160	2000' whichever CVO is earlier D4.5
ILS GS or	372	478	531	637	743	849	
LOC Descent Angle	3.00°						
MAP at D0.6 ITTC/D3.2 CVO							

STRAIGHT-IN LANDING RWY 23C				PANS OPS	
ILS		LOC (GS out)			
A: 605' (230') C: 625' (250')		MDA(H) 760' (385')			
B: 617' (242') D: 636' (261')					
FULL	TDZ or CL out	ALS out	ALS out		
A			900m		
B			1200m		
C			900m		
D			1200m		

CHANGES: None.


© JEPPESEN, 2000, 2019. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL



JEPPESSEN
6 SEP 19 11-5A Eff 12 Sep

CAIRO, EGYPT
CAT II ILS Rwy 23C

D-ATIS 122.6		CAIRO Approach (R) 119.05		CAIRO Tower 118.1		South 120.4		Ground North 121.9	
LOC ITTC 109.5		Final Apch Crs 225°		GS D3.0 ITTC 1323' (948')		CAT II ILS RA/DA(H) Refer to Minimums		Apt Elev 467' Rwy 375'	
MISSED APCH: Climb STRAIGHT AHEAD to 2000'. Not later than D4.5 CVO turn LEFT to reach VOR at 3500' and hold, or as directed.									
Alt Set: hPa		Rwy Elev: 14 hPa		Trans level: FL 60		Trans alt: 4500'			
Special Aircrew and Acft Certification Required.									



MSA
CVO VOR

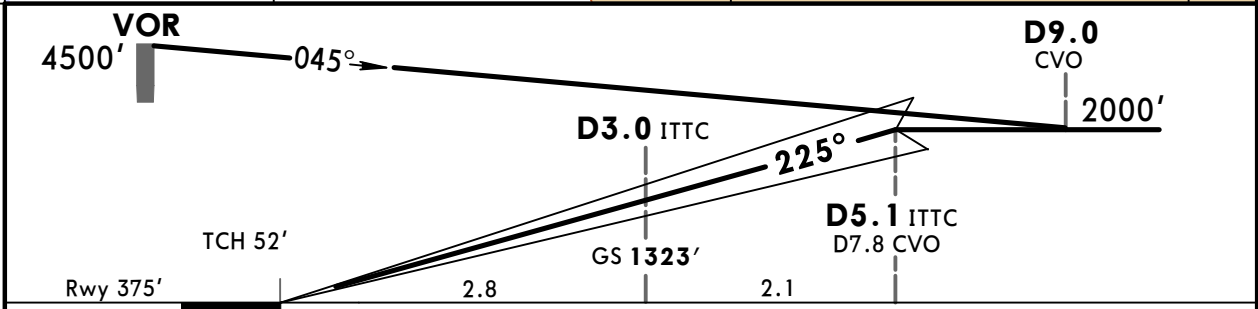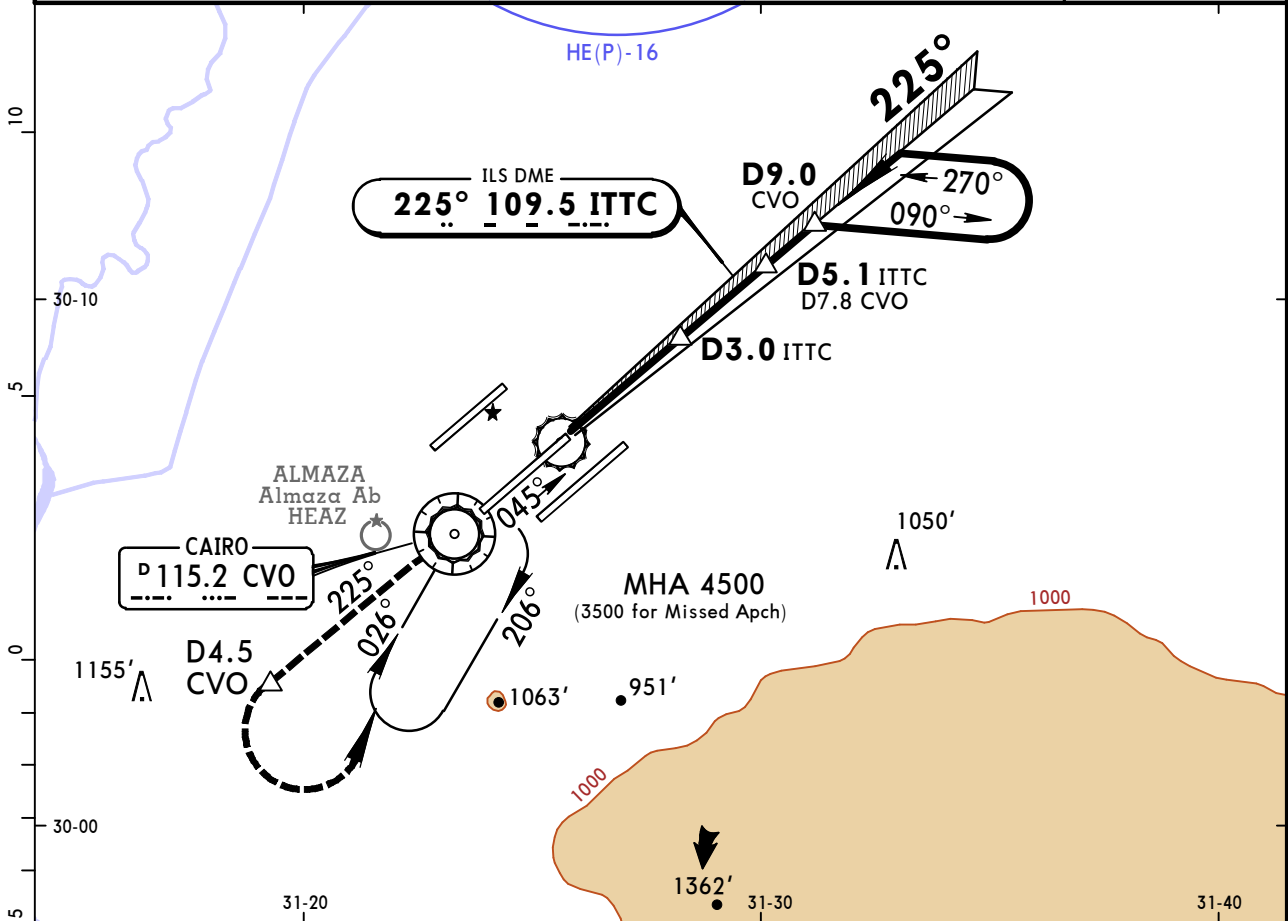

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	2000' whichever CVO is earlier	D4.5
GS	3.00°	372	478	531	637	743			

STRAIGHT-IN LANDING RWY 23C CAT II ILS			
A RA 107' DA(H) 475' (100')	B RA 116' DA(H) 484' (109')	C RA 129' DA(H) 496' (121')	D RA 143' DA(H) 510' (135')
RVR 350m		RVR 400m	

HECA/CAI
CAIRO INTL




6 SEP 19 11-6

Eff 12 Sep



CAIRO, EGYPT

ILS or LOC Rwy 23R

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
LOC ITTR 110.3	Final Apch Crs 225°	GS D5.7 ITTR 2000' (1801')	ILS DA(H) Refer to Minimums	Apt Elev 467' Rwy 199'
MISSED APCH: Immediate RIGHT turn onto track 280° climbing to 2000', then turn RIGHT to reach CAI VOR at 3500' and hold, or as directed. MAX 220 KT.				
Alt Set: hPa	Rwy Elev: 7 hPa	Trans level: FL 60	Trans alt: 4500'	



MSA
CVO VOR

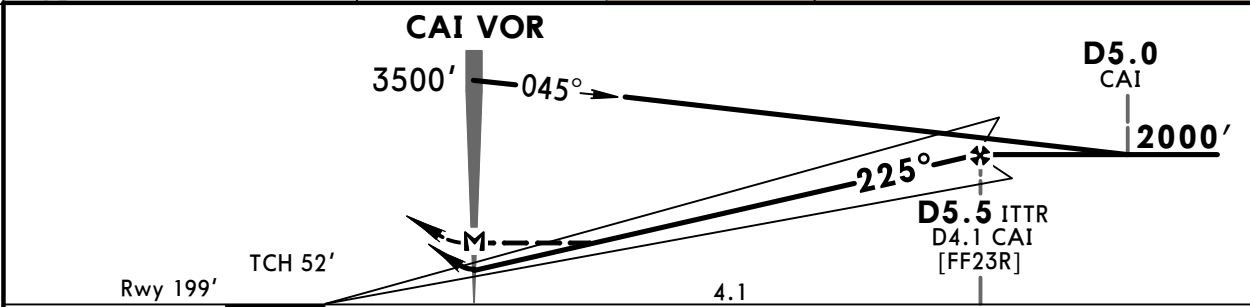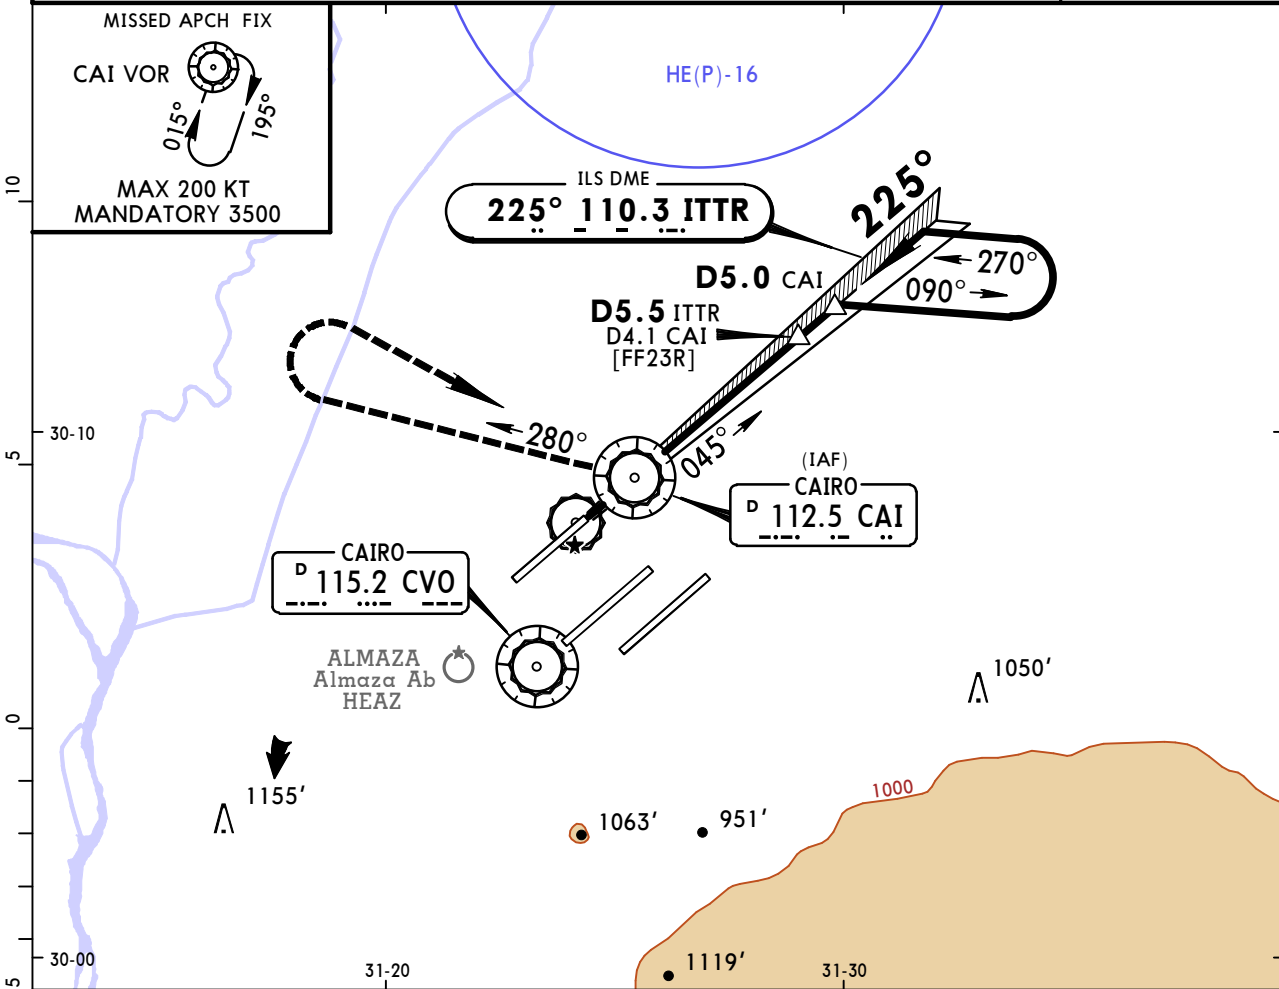

Gnd speed-Kts	70	90	100	120	140	160	HIALS	MAX	2000'	280°
ILS GS or LOC Descent Angle	3.00°	372	478	531	637	743	849	PAPI	220 KT	RT
MAP at CAI VOR										




STRAIGHT-IN LANDING RWY 23R					
ILS		LOC (GS out)			
DA(H)	A: 658' (459')	C: 678' (479')			
	B: 670' (471')	D: 689' (490')	MDA(H)	780' (581')	
FULL		ALS out		ALS out	
A	RVR 1500m		RVR 1500m		
B	VIS 1600m		VIS 1600m		
C	2000m		2000m		
D	2100m		2100m		

HECA/CAI
CAIRO INTL

JEPPESSEN
16 DEC 16 (12-1)

CAIRO, EGYPT
RNP Rwy 05L

D-ATIS 122.6	CAIRO Approach (R) 119.050		CAIRO Tower 118.1	South 120.4	Ground North 121.9
RNAV	Final Apch Crs 045°	Mandatory Alt CA436 2500' (2310')	LNAV MDA(H) 760' (570')	Apt Elev 467' Rwy 190'	
MISSED APCH: Climb STRAIGHT AHEAD to cross CA412, then turn RIGHT to reach CA442 at 4500' and hold or as directed.					
Alt Set: hPa	Rwy Elev: 7 hPa		Trans level: FL 60		Trans alt: 4500'

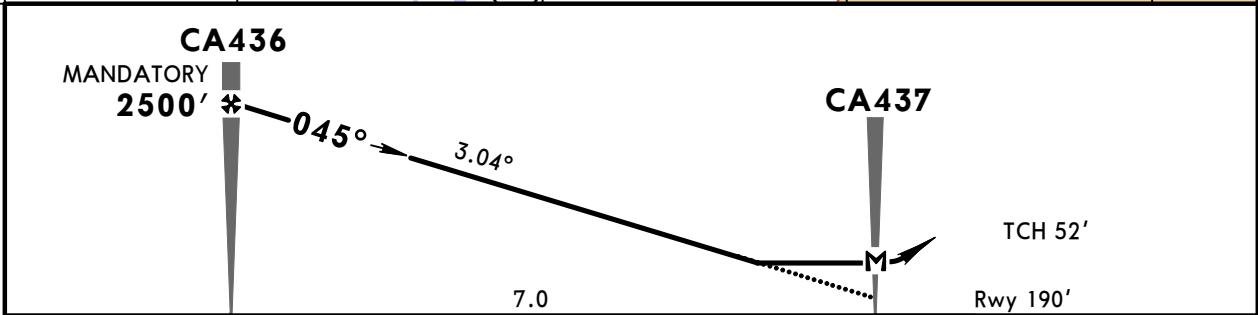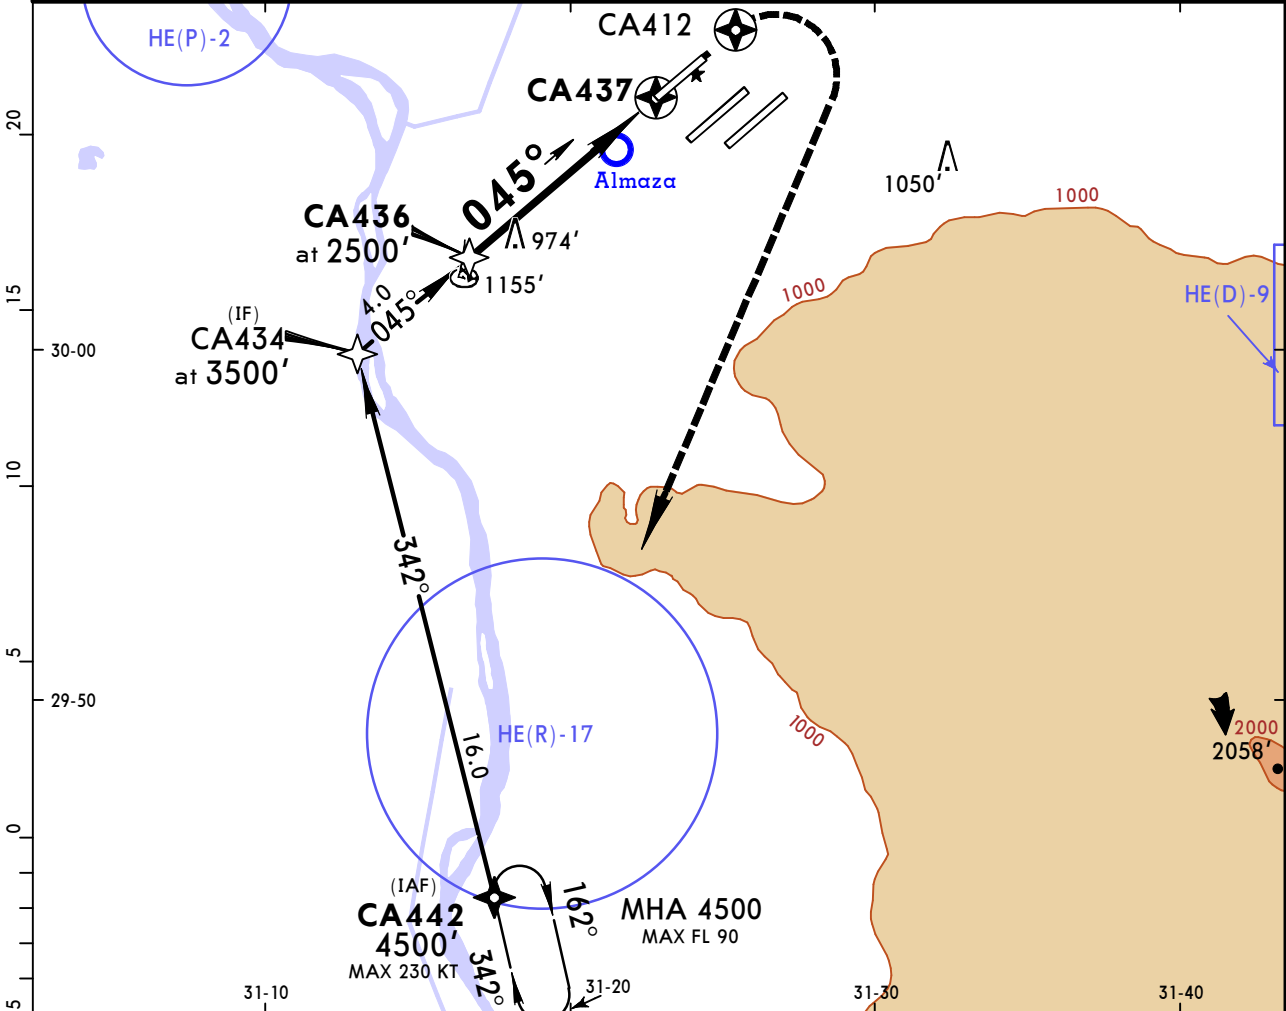

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI PAPI CA412 ↑
Descent Angle	3.04°	376	484	538	645	753	
MAP at CA437							

STRAIGHT-IN LANDING RWY 05L
LNAV
MDA(H) 760' (570')
ALS out

PANS OPS
A
B
C
D




1900m

HECA/CAI
CAIRO INTL

JEPPESSEN
16 DEC 16 12-2

CAIRO, EGYPT
RNP Rwy 05C

D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		South 120.4		Ground North 121.9	
RNAV		Final Apch Crs 045°		Mandatory Alt CA417 2500' (2118')		LNAV MDA(H) 710' (328')		Apt Elev 467' Rwy 382'	
MISSED APCH: Climb STRAIGHT AHEAD to cross CA419, then turn RIGHT to reach CA442 at 4500' and hold or as directed.									
Alt Set: hPa		Rwy Elev: 14 hPa		Trans level: FL 60			Trans alt: 4500'		

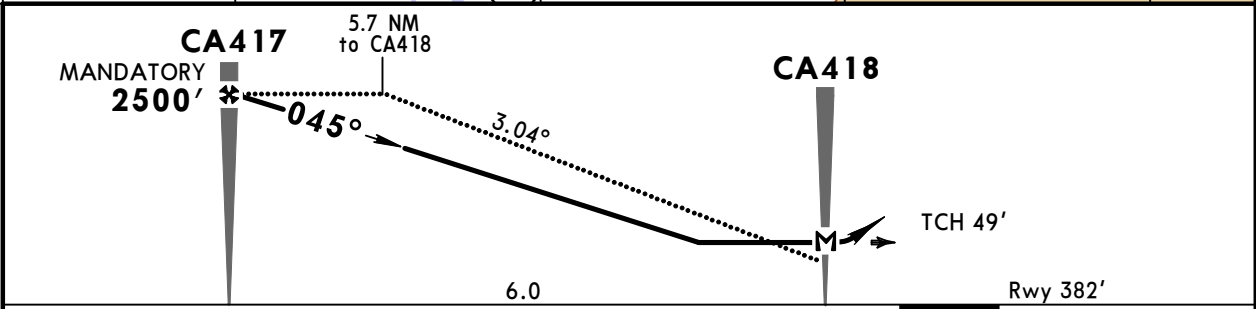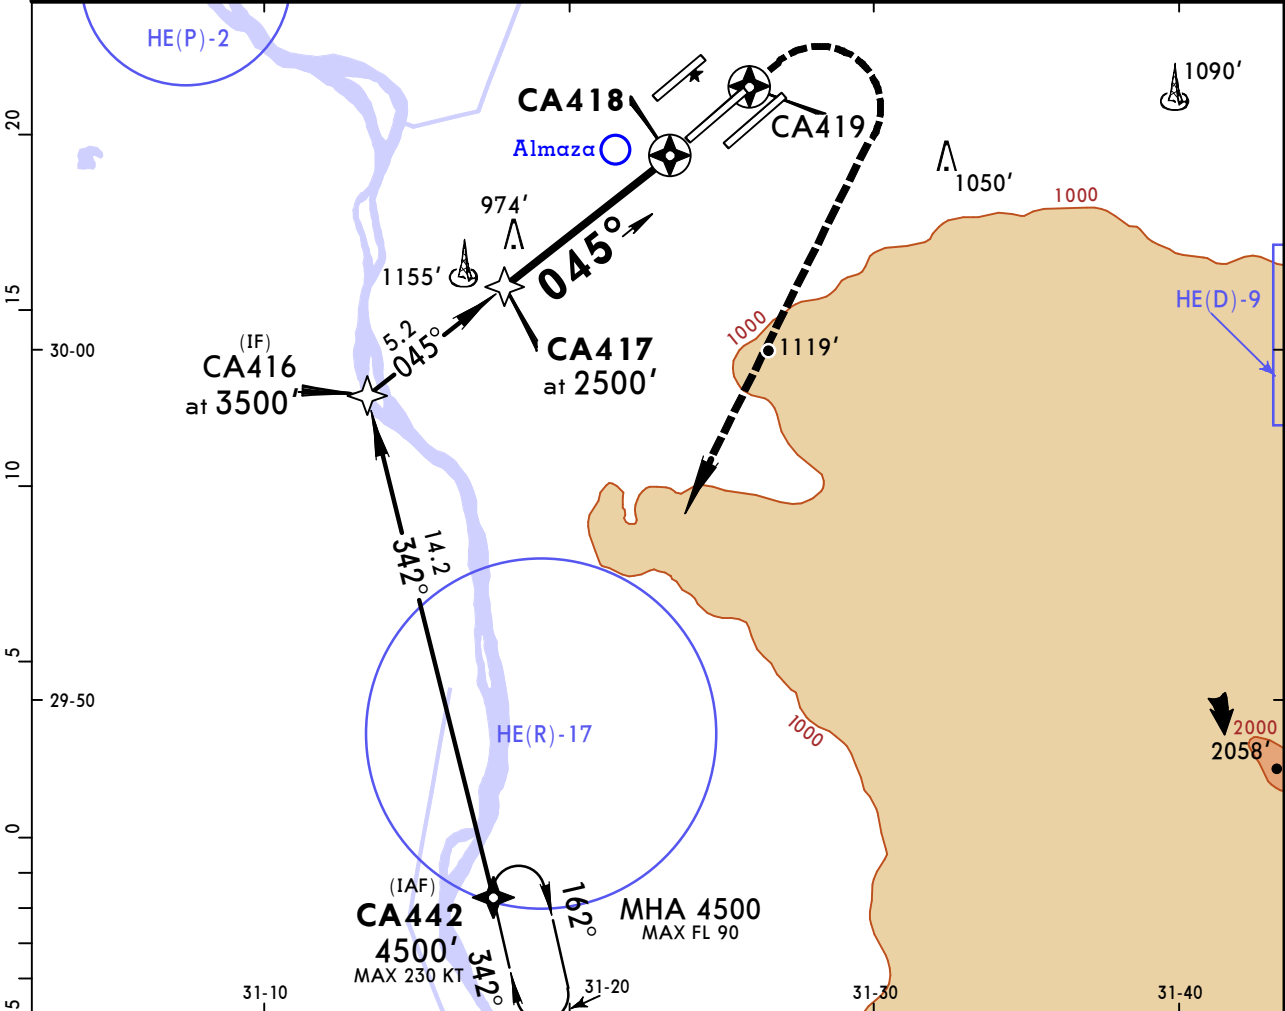

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	CA419 ↑
Descent Angle	3.04°	376	484	538	645	753		
MAP at CA418								




STRAIGHT-IN LANDING RWY 05C	
LNAV	
MDA(H) 710' (328')	
ALS out	
A	1000m
B	
C	
D	1200m
RVR 1500m VIS 1600m	

HECA/CAI
CAIRO INTL

JEPPESSEN
6 SEP 19 **12-3** Eff 12 Sep

CAIRO, EGYPT
RNP Rwy 05R

D-ATIS 122.6	CAIRO Approach (R) 119.050		CAIRO Tower 118.1	South 120.4	Ground North 121.9
RNAV	Final Apch Crs 045°	Mandatory Alt CA453 2500' (2052')	LNAV MDA(H) 820' (372')	Apt Elev 467' Rwy 448'	
MISSED APCH: Climb STRAIGHT AHEAD to cross CA456, then turn RIGHT to reach CA442 at 4500' and hold or as directed.					
Alt Set: hPa		Rwy Elev: 16 hPa	Trans level: FL 60		Trans alt: 4500'

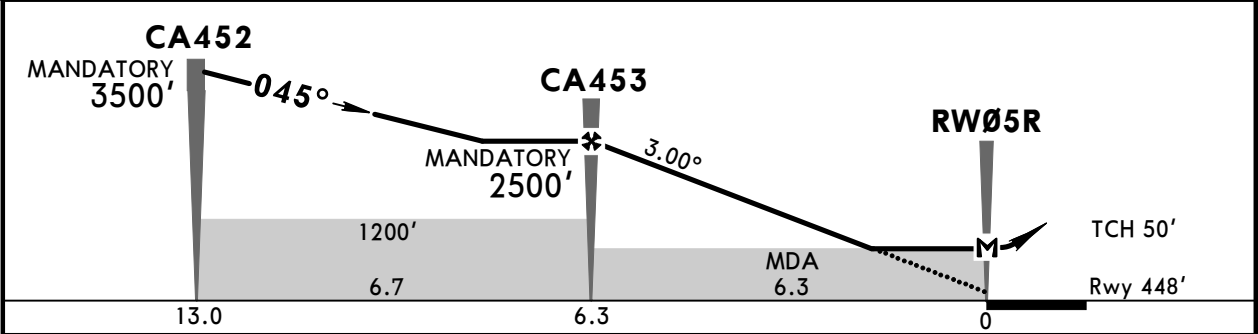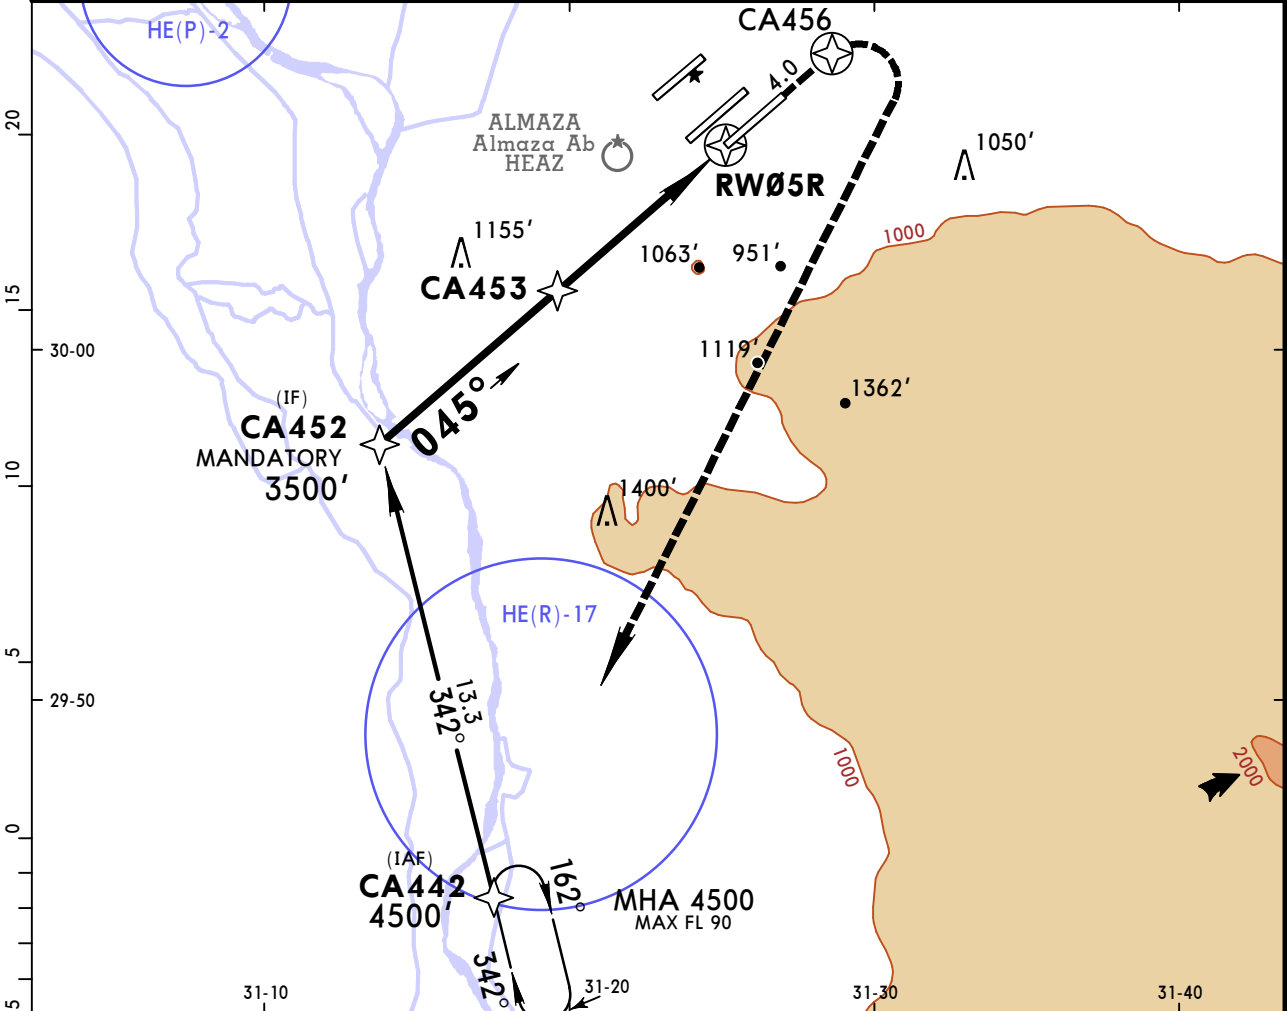

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	CA456 ↑
Descent Angle 3.00°	372	478	531	637	743	849		
MAP at RW05R								

STRAIGHT-IN LANDING RWY 05R	
LNAV	
MDA(H) 820' (372')	
ALS out	
A	
B	1000m
C	RVR 1500m VIS 1600m
D	2000m



HECA/CAI
CAIRO INTL

JEPPESSEN
6 SEP 19 12-4 Eff 12 Sep

CAIRO, EGYPT
RNP Rwy 23L

BRIEFING STRIP

D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		South 120.4	Ground	North 121.9
RNAV	Final Apch Crs 225°	Mandatory Alt CA474 2100' (1633')	LNAV MDA(H) 830' (363')	Apt Elev 467' Rwy 467'				
MISSED APCH: Climb STRAIGHT AHEAD to CA475, then turn LEFT to CA476, then turn LEFT to CA428 at FL 60 and hold or as directed.								
Alt Set: hPa		Rwy Elev: 17 hPa		Trans level: FL 60		Trans alt: 4500'		MSA ARP

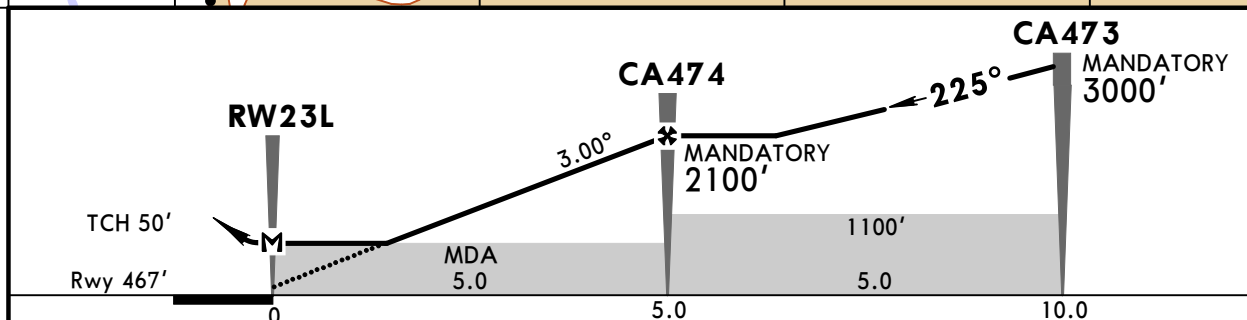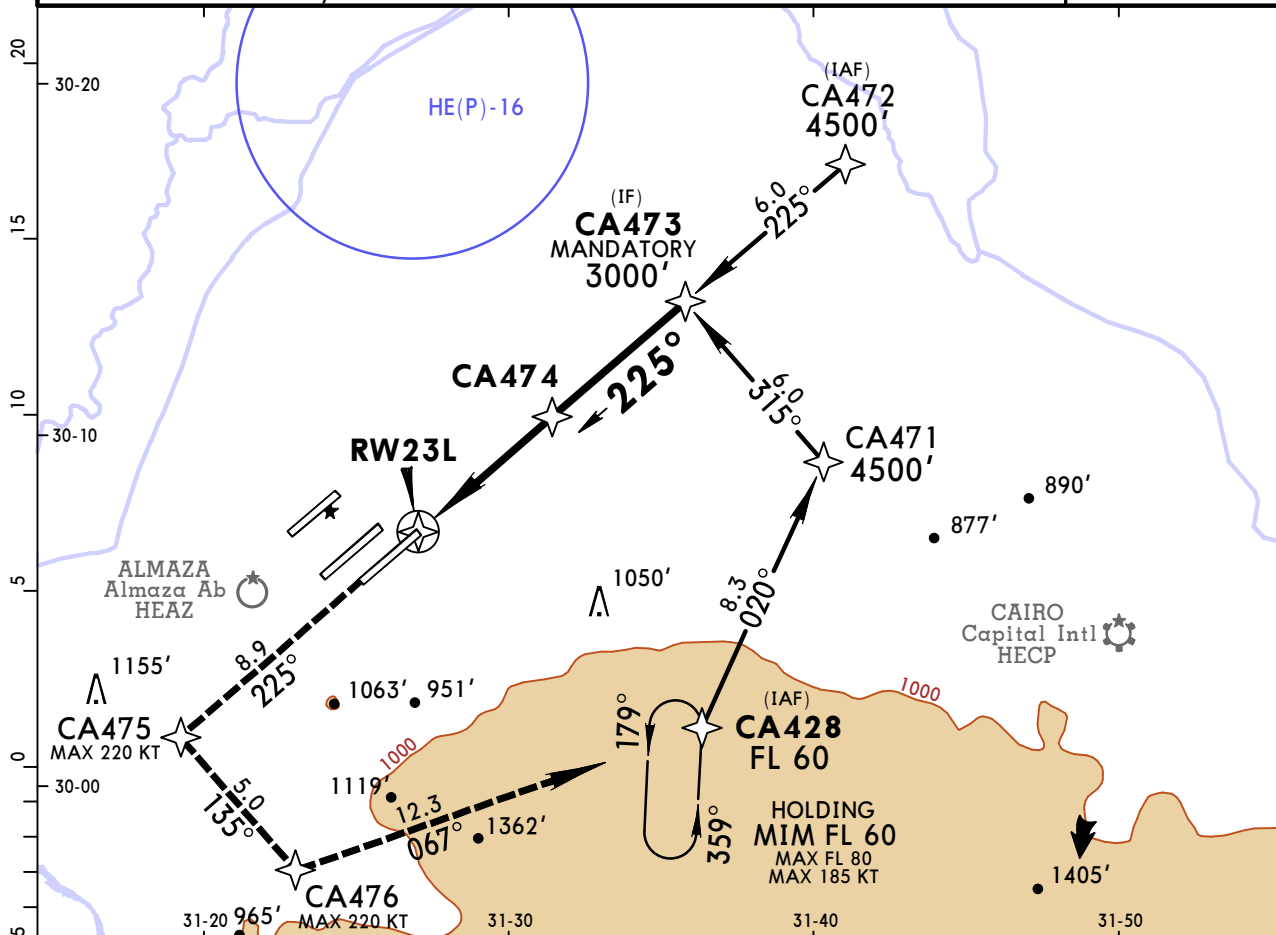

Gnd speed-Kts	70	90	100	120	140	160		CA475
Descent Angle	3.00°	372	478	531	637	743		
MAP at RW23L								



STRAIGHT-IN LANDING RWY 23L	
LNAV	
MDA(H) 830' (363')	
ALS out	
A	
B	1000m
C	RVR 1500m VIS 1600m
D	RVR 1500m VIS 1600m

HECA/CAI
CAIRO INTL

JEPPESSEN
6 SEP 19 (12-5) Eff 12 Sep

CAIRO, EGYPT
RNP Rwy 23C

D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		Ground South 120.4 North 121.9	
RNAV	Final Apch Crs 225°	Mandatory Alt CA424 2500' (2125')	LNAV MDA(H) 810' (435')	Apt Elev 467' Rwy 375'			
MISSED APCH: Climb STRAIGHT AHEAD to cross CA418, then turn LEFT to reach CA428 at FL 60 and hold or as directed.							
Alt Set: hPa		Rwy Elev: 14 hPa		Trans level: FL 60			
						MSA ARP	

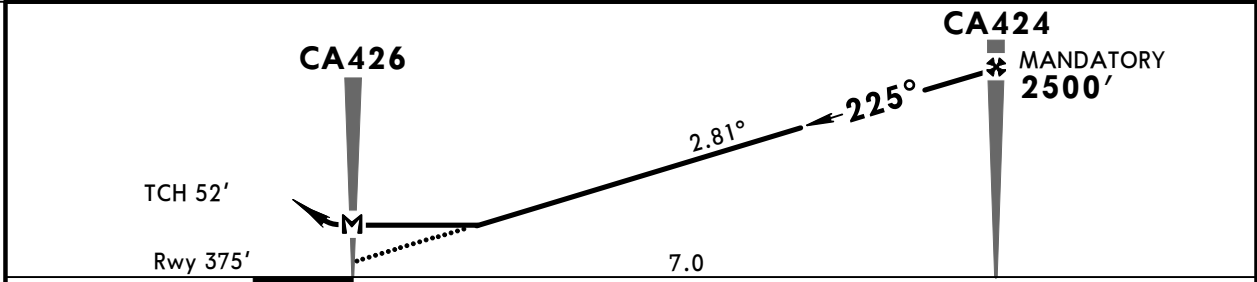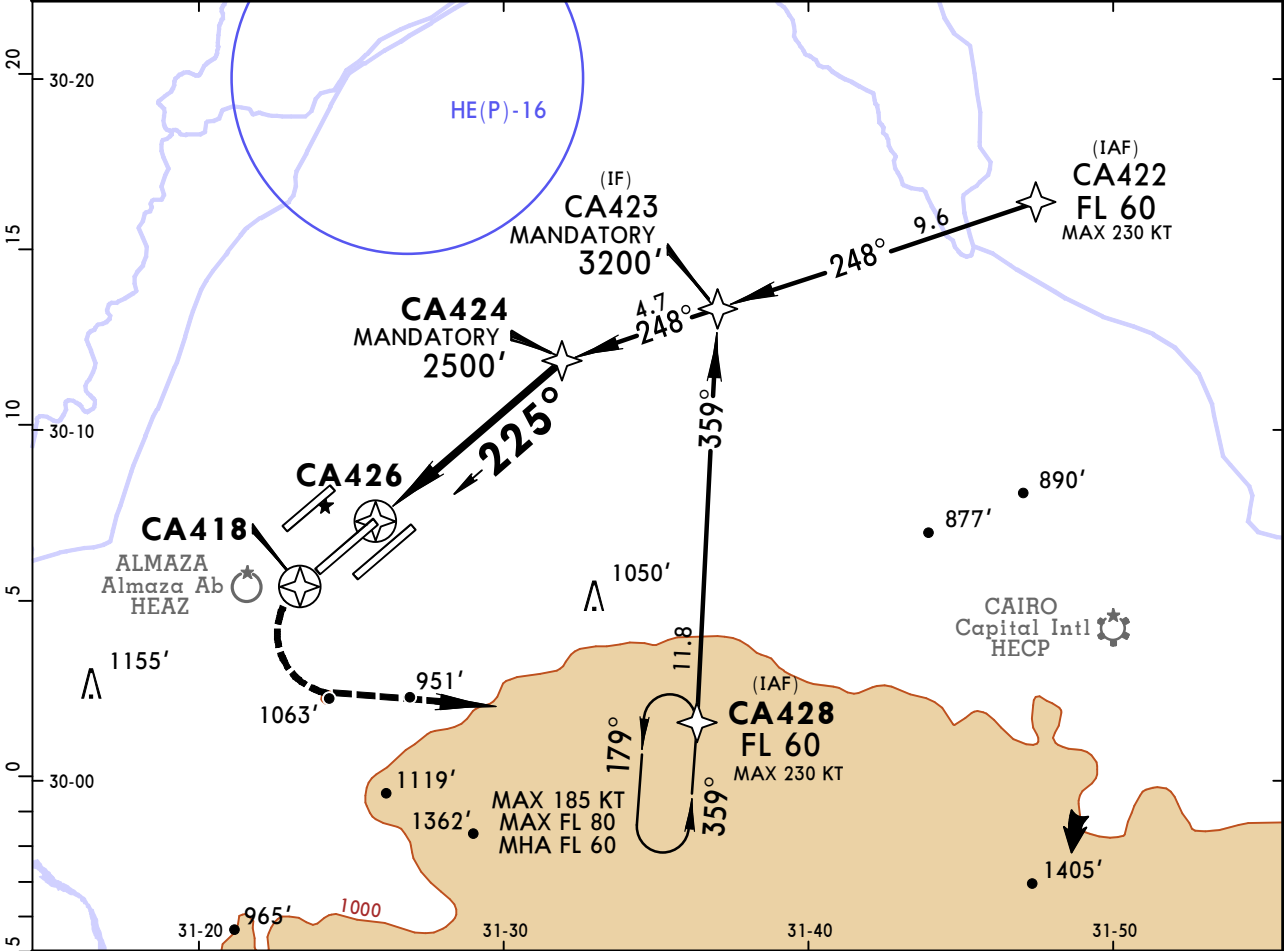

Gnd speed-Kts	70	90	100	120	140	160		CA418
Descent Angle	2.81°	348	447	497	596	795		
MAP at CA426								

STRAIGHT-IN LANDING RWY 23C	
LNAV	
MDA(H) 810' (435')	
ALS out	



A	1600m
B	
C	
D	

HECA/CAI
CAIRO INTL

JEPPESSEN
6 SEP 19 12-6 Eff 12 Sep

CAIRO, EGYPT
RNP Rwy 23R

D-ATIS		CAIRO Approach (R)		CAIRO Tower		Ground	
122.6		119.050		118.1		South 120.4	North 121.9
RNAV	Final Apch Crs 225°	Mandatory Alt CA431 2500' (2301')	LNAV MDA(H) 830' (631')	Apt Elev 467' Rwy 199'			
MISSED APCH: Climb immediate RIGHT turn on 280° to CA518 at 2000' or above, then turn RIGHT to CA519 at 2800' or above, then turn RIGHT to CA520 at 4000', then to CA428 at FL 60 and hold or as directed. MAX 185 KT.							
Alt Set: hPa		Rwy Elev: 7 hPa		Trans level: FL 60			
						MSA ARP	

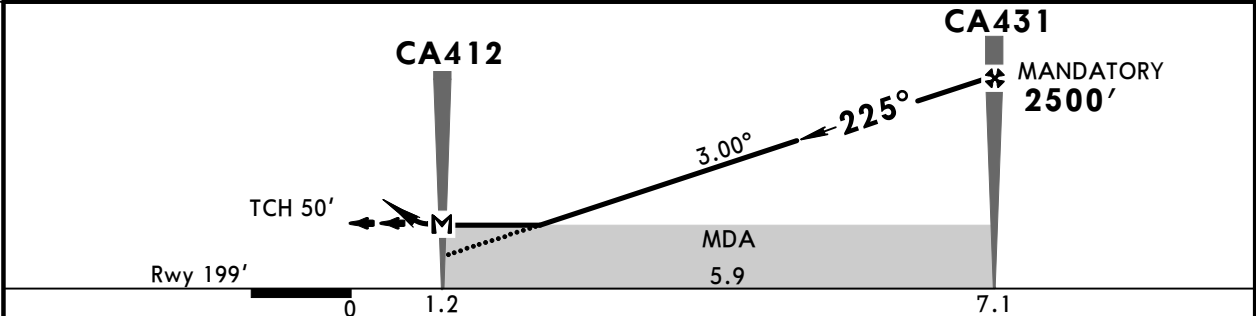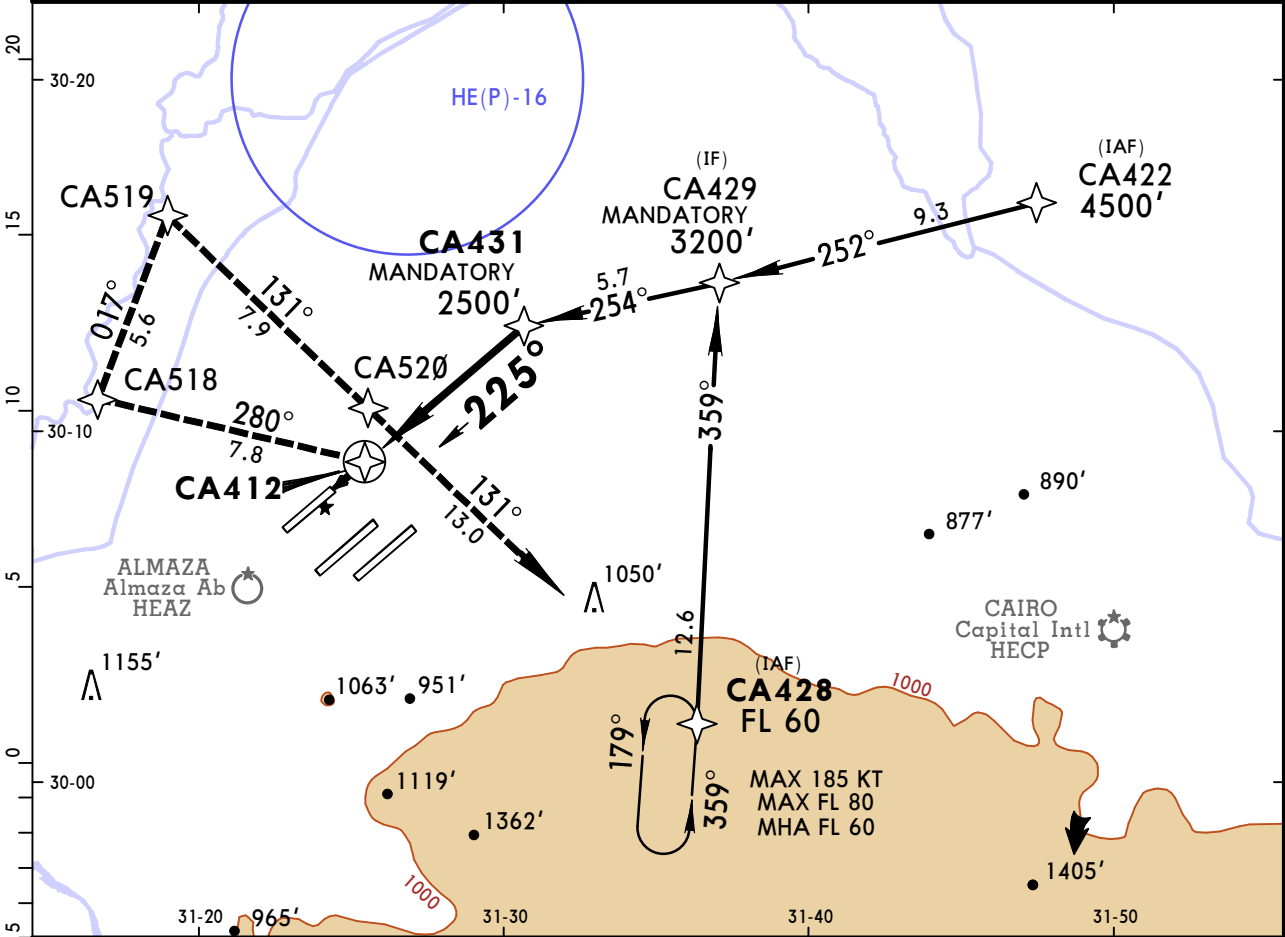

Gnd speed-Kts	70	90	100	120	140	160	 HIALS PAPI PAPI	MAX 185 KT	at or above 2000' on 280° RT	CA518
Descent Angle 3.00°	372	478	531	637	743	849				
MAP at CA412										

STRAIGHT-IN LANDING RWY 23R											
LNAV											
MDA(H) 830' (631')											
ALS out											




A	2700m
B	
C	
D	

HECA/CAI
CAIRO INTL

JEPPESEN
2 NOV 18 (13-1) Eff 8 Nov

CAIRO, EGYPT
VOR Rwy 05L

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
VOR CAI 112.5	Final Apch Crs 045°	Minimum Alt D10.0 2500' (2310')	MDA(H) 760' (570')	Apt Elev 467' Rwy 190'
MISSED APCH: Immediately turn LEFT onto 320° climbing to 2500', then turn RIGHT to VOR and hold at 4000', or as directed.				
Alt Set: hPa	Rwy Elev: 7 hPa	Trans level: FL 60	Trans alt: 4500'	

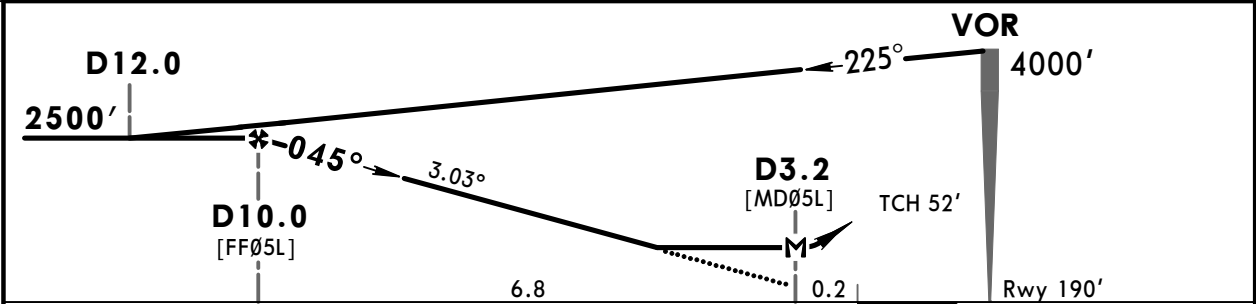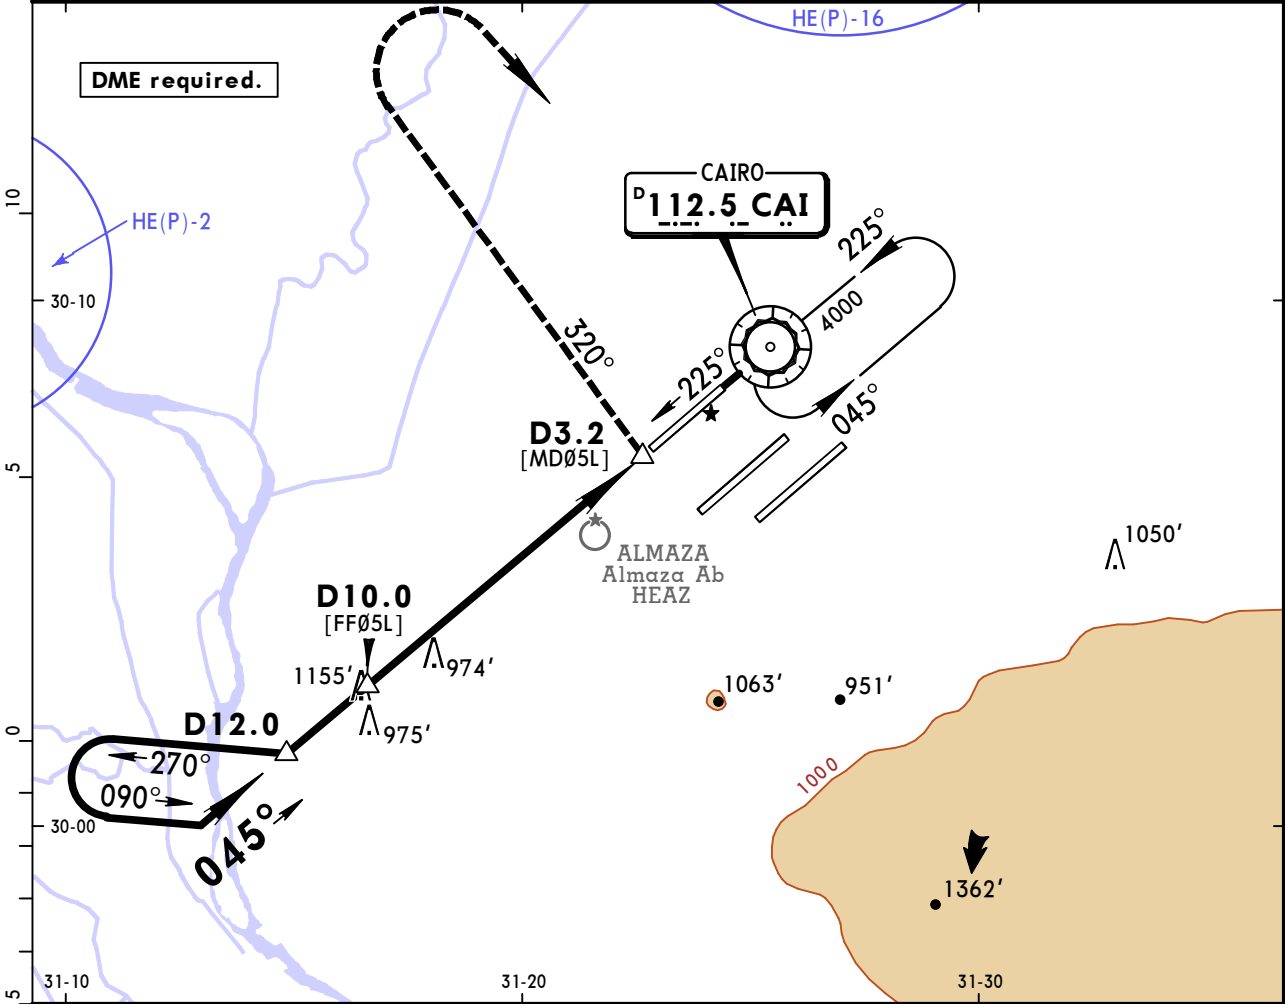


Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI PAPI	2500' onto 320° LT
Descent Angle	3.03°	375	482	536	643	750		
MAP at D3.2								

STRAIGHT-IN LANDING RWY 05L					
MDA(H) 760' (570')					
		ALS out			
A	1900m				
B					
C					
D					

HECA/CAI
CAIRO INTL

JEPPESEN
2 NOV 18 (13-2) Eff 8 Nov

CAIRO, EGYPT
VOR Rwy 05C

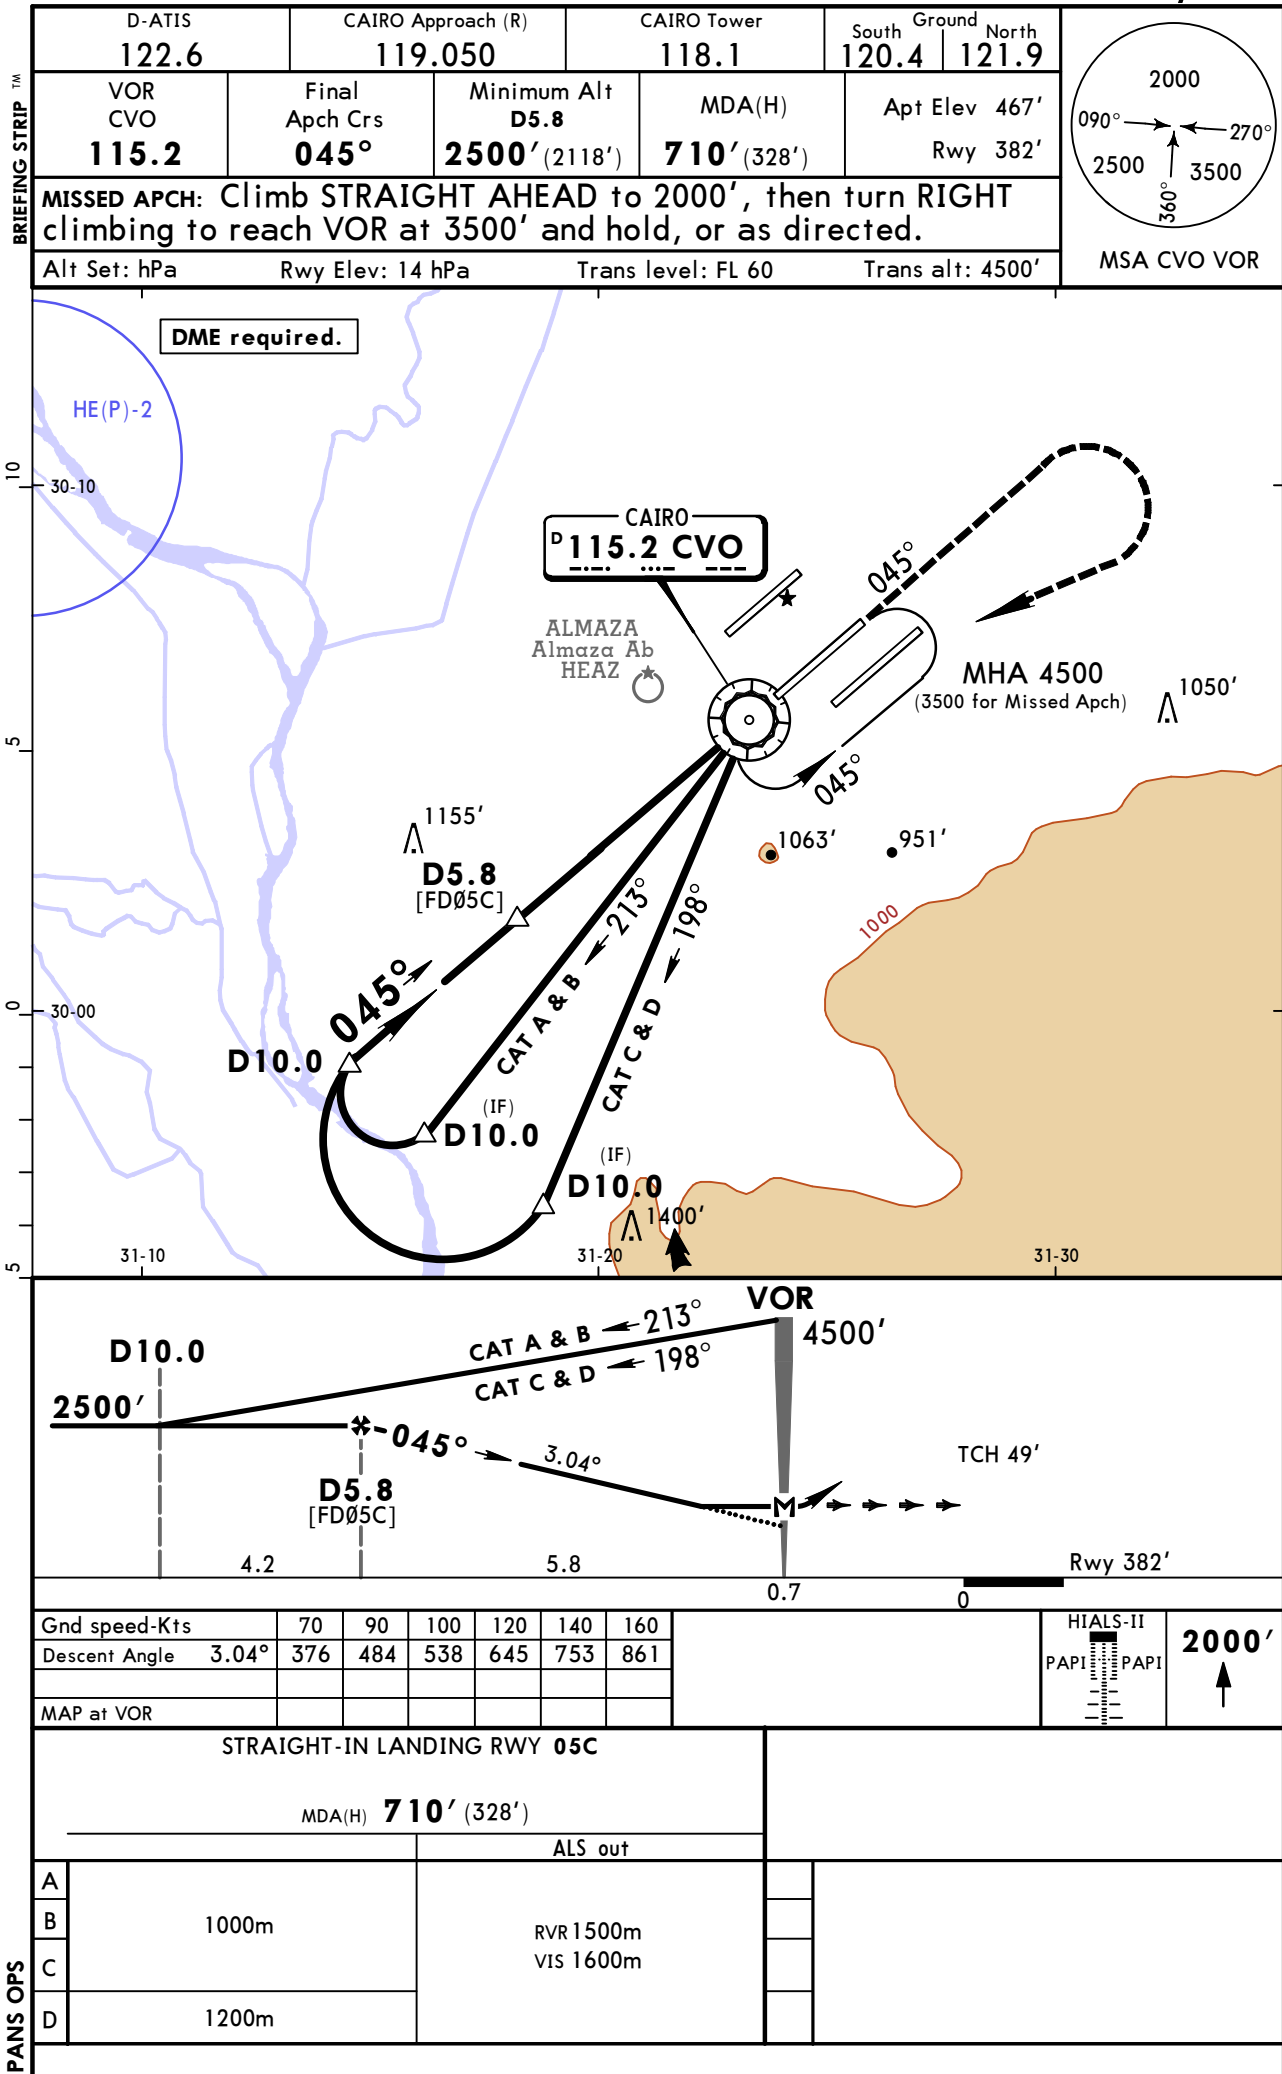

CHANGES: None.

© JEPPESEN, 2000, 2016. ALL RIGHTS RESERVED.


HECA/CAI
CAIRO INTL

JEPPESSEN
6 SEP 19 (13-3) Eff 12 Sep



CAIRO, EGYPT
VOR Rwy 23L


BRIEFING STRIP™

D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		South Ground 120.4		North 121.9	
VOR CVO 115.2		Final Apch Crs 236°		Minimum Alt D8.7 2100' (1633')		MDA(H) 970' (503')		Apt Elev 467'	
MISSED APCH: Immediately turn LEFT onto 200° climbing at or above 2000', then turn LEFT to reach VOR at 4500' and hold, or as directed.									
Alt Set: hPa		Apt Elev: 17 hPa		Trans level: FL 60		Trans alt: 4500'			



2000
090° 270°
2500 3500
360°
MSA
CVO VOR

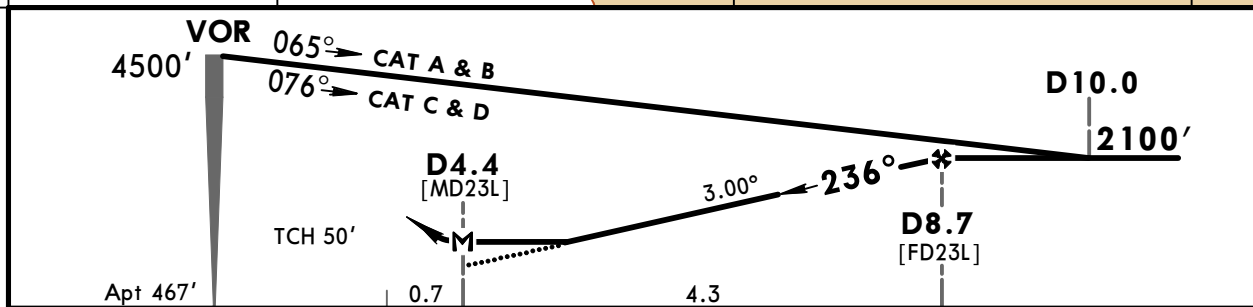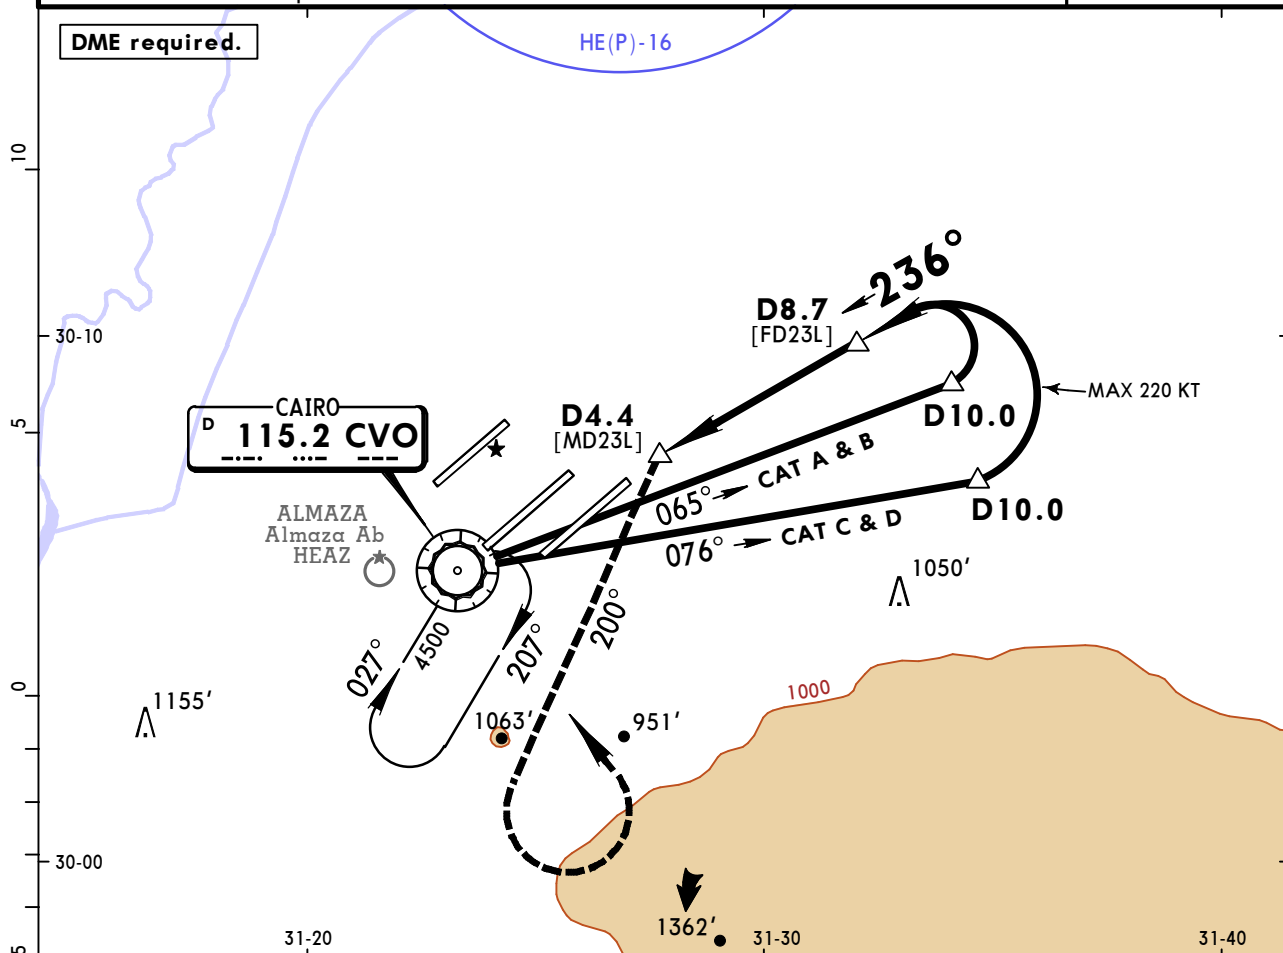

Gnd speed-Kts	70	90	100	120	140	160		At or above 2000' onto 200° LT
Descent Angle	3.00°	372	478	531	637	743		
MAP at D4.4								

STRAIGHT-IN LANDING RWY 23L			
MDA(H) 970' (503')		ALS out	
A	1600m		
B			
C			
D			

PANS OPS


CHANGES: None.




© JEPPESEN, 2011, 2018. ALL RIGHTS RESERVED.

HECA/CAI
CAIRO INTL

6 SEP 19 **13-4** Eff 12 Sep

CAIRO, EGYPT
VOR Rwy 23C

BRIEFING STRIP™	D-ATIS 122.6		CAIRO Approach (R) 119.050		CAIRO Tower 118.1		South 120.4		Ground North 121.9	
	VOR CVO 115.2		Final Apch Crs 225°		Minimum Alt D7.8 2000' (1625')		MDA(H) 760' (385')		Apt Elev 467' Rwy 375'	
	MISSED APCH: Climb STRAIGHT AHEAD on 225° to 2500'. Not later than D4.5 turn LEFT to reach VOR at 3500' and hold, or as directed.									
	Alt Set: hPa		Rwy Elev: 14 hPa		Trans level: FL 60		Trans alt: 4500'			
										
MSA CVO VOR										

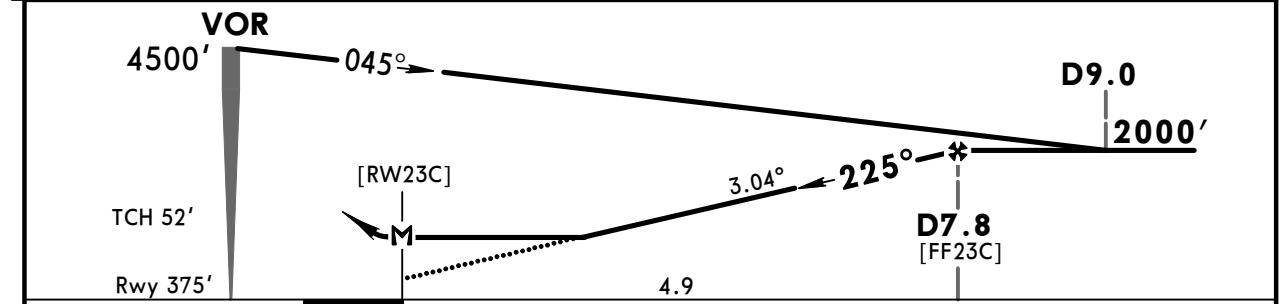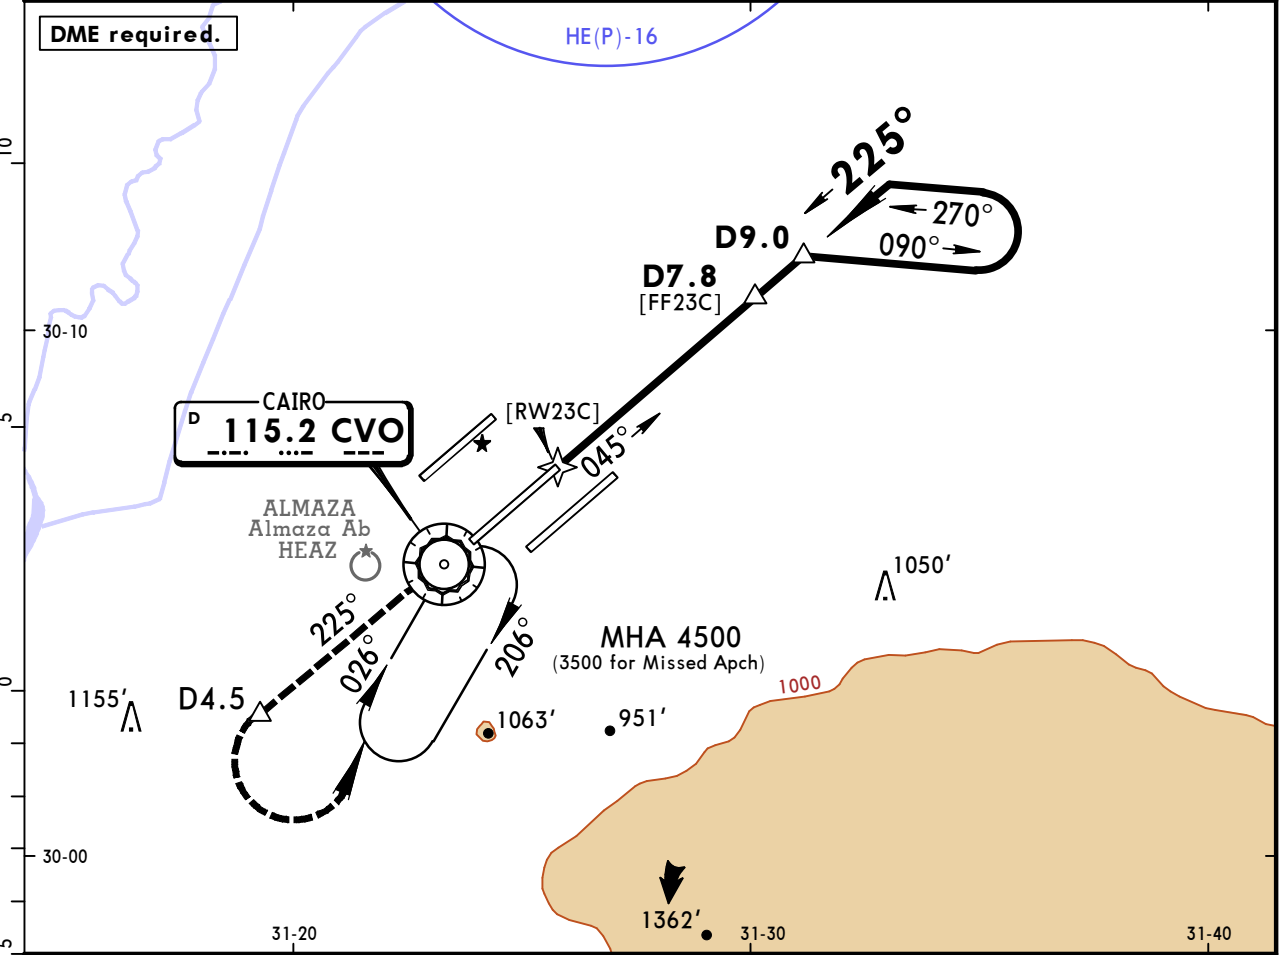

Gnd speed-Kts	70	90	100	120	140	160	HIALS-II PAPI PAPI	2500' whichever is earlier	D4.5
Descent Angle 3.04°	376	484	538	645	753	861			
D7.8 to MAP	4.9	4:12	3:16	2:56	2:27	2:06			


STRAIGHT-IN LANDING RWY 23C							
MDA(H) 760' (385')				ALS out			
A							
B	1400m			RVR 1500m VIS 1600m			
C							
D	RVR 1500m VIS 1600m						

HECA/CAI
CAIRO INTL



JEPPESSEN
6 SEP 19 13-5 Eff 12 Sep

CAIRO, EGYPT
VOR Rwy 23R

D-ATIS 122.6	CAIRO Approach (R) 119.050	CAIRO Tower 118.1	South 120.4	Ground North 121.9
VOR CAI 112.5	Final Apch Crs 225°	Minimum Alt D4.1 CAI 2000' (1801')	MDA(H) 780' (581')	Apt Elev 467' Rwy 199'
MISSED APCH: Immediate RIGHT turn onto track 280° climbing to 2000', then turn RIGHT to reach CAI VOR at 3500' and hold, or as directed. MAX 220 KT.				
Alt Set: hPa	Rwy Elev: 7 hPa	Trans level: FL 60	Trans alt: 4500'	



MSA
CVO VOR

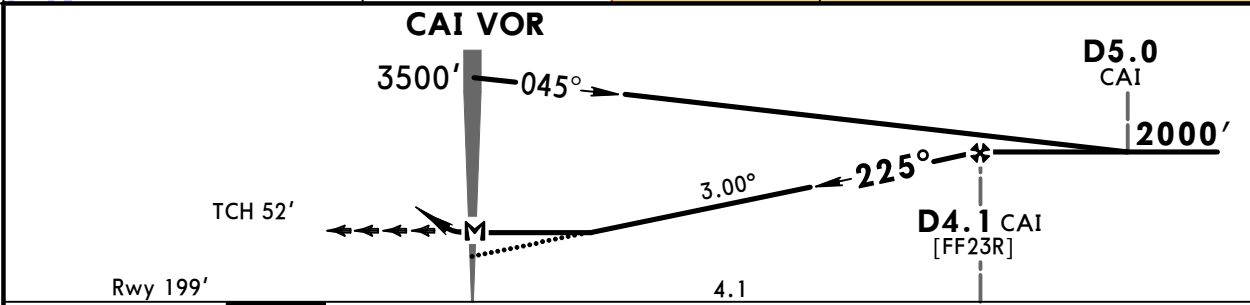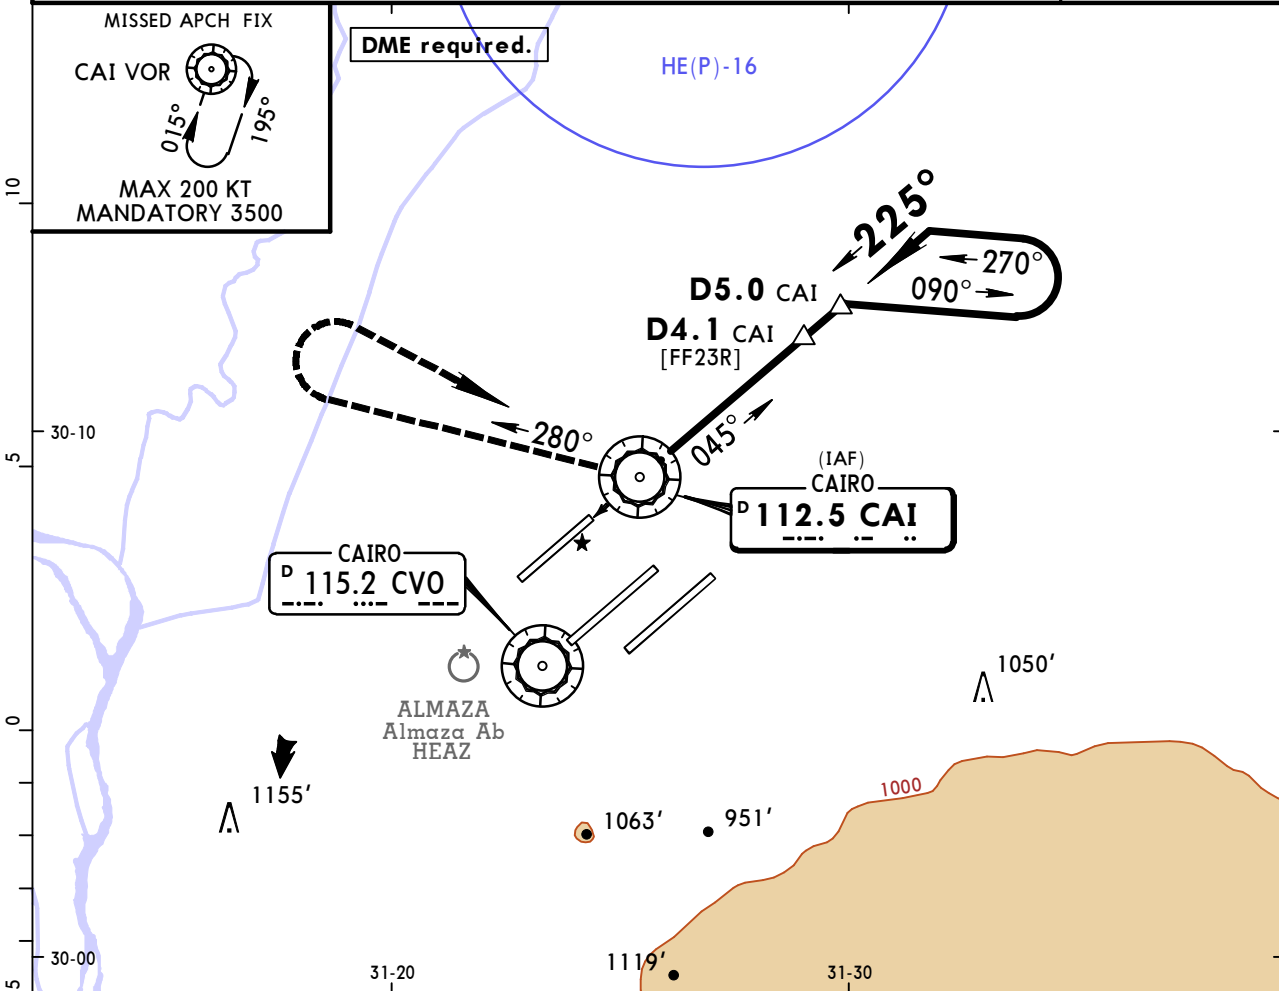

0 1.2									HIALS PAPI PAPI	MAX 220 KT	2000' RT on 280°
Gnd speed-Kts	70	90	100	120	140	160					
Descent Angle 3.00°	372	478	531	637	743	849					
MAP at CAI VOR											

STRAIGHT-IN LANDING RWY 23R			
MDA(H) 780' (581')		ALS out	

A			
B			
C	2500m		
D			

Chart changes since cycle 21-2019

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
CAIRO, (CAIRO INTL - HECA)				

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport HECA